
FED. SUP CLASS
4730

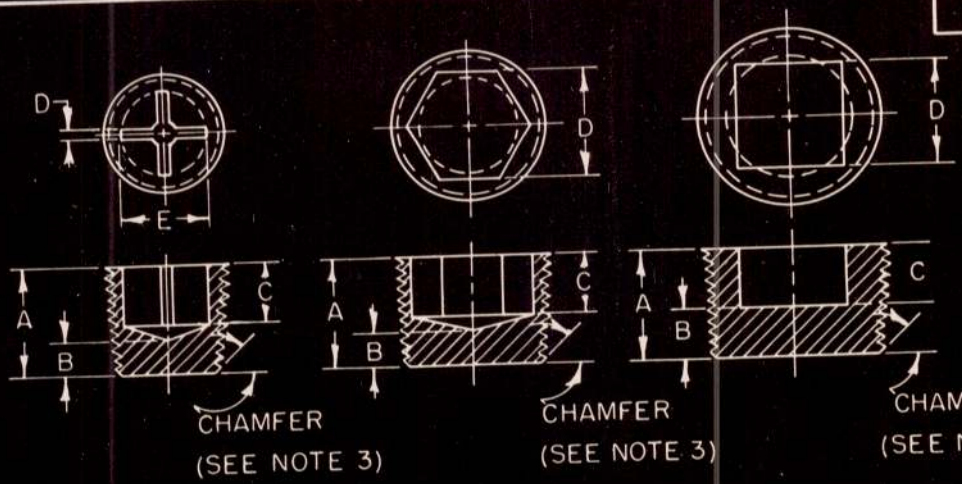


| DASH NO. | NOM. SIZE NPTF | THREAD | A MIN | A MAX | B MIN | C MIN | D MIN | D MAX | E MIN | HEAD STYLE |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 1/16 | 27 | .250 | .270 | .06 | .125 | .050 | .060 | .190 | CROSS SLOTTED |
| 2 | 1/8 | 27 | .260 | .280 | .06 | .125 | .050 | .078 | .270 | |
| 3 | 1/4 | 18 | .395 | .425 | .09 | .156 | .060 | .103 | .339 | |
| 4 | 3/8 | 18 | .395 | .425 | .13 | .156 | .060 | .131 | .407 | |
| 5 | 1/2 | 14 | .520 | .560 | .16 | .1875 | .375 | .380 | | HEX RECESS |
| 6 | 3/4 | 14 | .530 | .570 | .18 | .1875 | .563 | .568 | | |
| 7 | 1 | 11½ | .670 | .710 | .20 | .250 | .625 | .630 | | |
| 8 | 1-1/4 | 11½ | .80 | .85 | .22 | .4375 | .76 | .77 | | SQUARE RECESS |
| 9 | 1-1/2 | 11½ | .83 | .88 | .24 | .4375 | .76 | .77 | | |
| 10 | 2 | 11½ | .88 | .94 | .26 | .4375 | .88 | .90 | | |
| 11 | 2-1/2 | 8 | 1.07 | 1.13 | .29 | .500 | 1.14 | 1.16 | | |
| 12 | 3 | 8 | 1.13 | 1.20 | .31 | .500 | 1.39 | 1.42 | | |
| 13 | 3-1/2 | 8 | 1.18 | 1.25 | .34 | .500 | 1.52 | 1.55 | | |
| 14 | 4 | 8 | 1.22 | 1.30 | .37 | .500 | 2.02 | 2.05 | | |
| 15 | 5 | 8 | 1.31 | 1.40 | .46 | .500 | 2.02 | 2.05 | | |

MATERIAL: PLUG BODY: ALUMINUM; QQ-A-268, QQ-A-365, QQ-A-411

PROTECTIVE FINISH: PLUG BODY, ANODIZED PER SPECIFICATION MIL-A-8625

THREADS: THREADS SHALL BE "DRY SEAL" NPTF-(SHORT) IN ACCORDANCE WITH HANDBOOK H28

RECESS TAPER: THE OPPOSITE SIDES OF SQUARE AND HEXAGON RECESSES SHALL BE PARALLEL, BUT MAY HAVE A TAPER NOT IN EXCESS OF 4° TOTAL.

NOTES:

(1) PLUGS MAY BE FABRICATED BY CASTING, FORGING, OR MACHINING.

(2) DIMENSIONS ARE IN INCHES.

(3) THE POINTS SHALL BE NORMAL TO THE AXIS OF THE PLUG AND FLAT. THE ENTERING END SHALL BE CHAMFERED AT AN ANGLE OF 45° TO 60° WITH THE AXIS OF THE THREAD. CHAMFER SHALL EXTEND 0.020 BEYOND THE MINOR DIAMETER OF THE THREAD ± 0.020. THE CHAMFER SHALL BE INCLUDED IN MEASUREMENTS OF THREAD LENGTH.

(4) THE "MS" PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS21337-4.

(5) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

(6) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.

(7) THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN, AND SHALL TAKE PRECEDENCE WHEN IN CONFLICT WITH OTHER DOCUMENTS REFERENCED HEREIN.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 14 FEB 61 REVISED

| | | |
|---|---|---|
| P.A. A-ORD<br>Other Cust<br>N - Docks<br>AF - MOA | TITLE<br>PLUGS, PIPE, ALUMINUM | MILITARY STANDARD<br>MS21337<br>SHEET 1 OF 1 |
| PROCUREMENT SPECIFICATION<br>WW-P-471 | SUPERSEDES: | |

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20210 20T05:07Z
Check the source to verify that this is the current version before use.