
MILITARY SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL92

Part numbers M15733/48-0002, -0003, -0004, and -0005 are inactive for new design after 24 November 1982. Part number M15733/48-0001 is inactive for new design after 20 June 1983. See table III for substitution data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

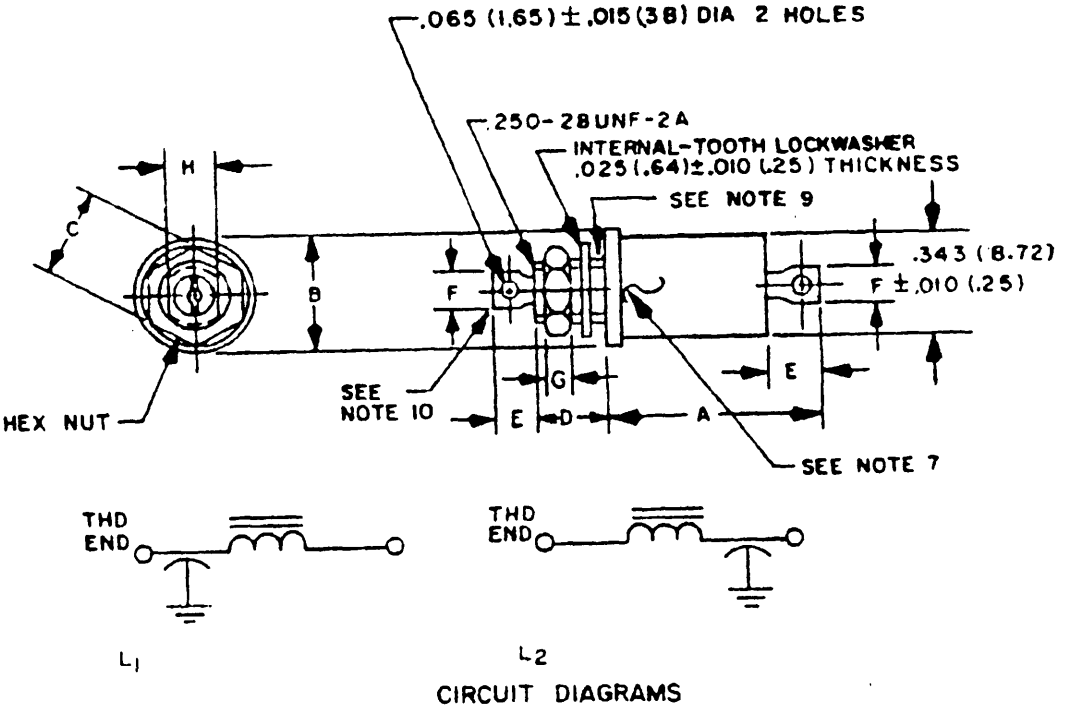

(F) FIGURE 1. Case dimensions and circuit configuration.

(F) denotes change

AMSC N/A FSC 5915

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:22Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Metric equivalents are in parentheses.
4. Circuit diagram is for information only.
5. All filters shall be supplied with mounting hardware. For dash numbers 0001 and 0002 the internal tooth lockwasher shall be phospher-bronze with a brass hexagonal nut, both shall be silver plated.
6. Use of style FLS2 with or without shoulder is optional.
7. Terminal identification (nonsymmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "L" or "C" as follows:

Circuit	Symbol
L_1	C
L_2	L

8. Recommended mounting torque: 48 ounce-inch maximum.
(F) 9. Imperfect thread or undercut optional .050 (1.27 mm) maximum.
(F) 10. The flag terminals shall be aligned to within 10° of the vertical (thread bushing flats).

FIGURE 1. Case dimensions and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

Dimensions

Dash number	A	B	C		D		E		F		G		H	
	Max	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
0001	.760 (19.30)	.385 (9.78)	.302 (7.67)	.322 (8.18)	.177 (4.50)	.197 (5.00)	.140 (3.56)	.190 (4.83)	.100 (2.54)	.130 (3.30)	.088 (2.24)	.098 (2.49)	.190 (4.83)	.210 (5.33)
0002	.861 (21.87)	.406 (10.31)	.302 (7.67)	.322 (8.18)	.177 (4.50)	.197 (5.00)	.140 (3.56)	.160 (4.06)	.100 (2.54)	.130 (3.30)	.088 (2.24)	.098 (2.49)	.190 (4.83)	.210 (5.33)
0003	.76 (19.3)	.385 (9.78)	.302 (7.67)	.322 (8.18)	.302 (7.67)	.3.22 (8.18)	.140 (3.56)	.160 (4.06)	.100 (2.54)	.130 (3.30)	.088 (2.24)	.098 (2.49)	.190 (4.83)	.210 (5.33)
0004	.76 (19.3)	.385 (9.78)	.302 (7.67)	.322 (8.18)	.302 (7.67)	.3.22 (8.18)	.140 (3.56)	.160 (4.06)	.100 (2.54)	.130 (3.30)	.088 (2.24)	.098 (2.49)	.190 (4.83)	.210 (5.33)
0005	.76 (19.3)	.385 (9.78)	.302 (7.67)	.322 (8.18)	.302 (7.67)	.3.22 (8.18)	.140 (3.56)	.160 (4.06)	.100 (2.54)	.130 (3.30)	.088 (2.24)	.098 (2.49)	.190 (4.83)	.210 (5.33)

FIGURE 1. Case dimensions and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 7 grams, maximum.

Case: Metal.

Terminals: Solderable.

Operating temperature range: -55°C to +125°C.

Rated voltage: See table I.

Rated current: See table I.

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance to ground: Not applicable.

Temperature rise: 25°C, maximum

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test temperature: 25°C.

Test voltage: 100 V dc applied between each terminal and ground, for a period of 1 to 5 seconds.

Maximum charging current: 50 mA.

Barometric pressure (reduced):

In accordance with MIL-F-15733 except test condition E (150,000 feet) for dash number 0001.

Maximum charging current: 50 mA.

Voltage conditioning (applicable to dash number 0001 only):

The burn-in test shall be conducted as follows:

Test temperature: 125°C.

Test voltage: 70 V dc.

Points of application of test voltage: Between case and the live terminals.

Duration of exposure to test voltage: 250 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

Insulation resistance:

Test potential: 50 V dc.

Maximum charging current: 50 mA.

Insulation resistance minimum	Dash number
700 Megohms at +25°C	0001
100 Megohms at +25°C	0002 through 0005
70 Meghoms at +125°C	0001

Voltage drop: See table I.

Insertion loss: Shall be as specified in table I.

Terminal strength: Test condition A, 5 pounds.

Salt spray (corrosion):

Test condition	Dash number
B	0001 and 0002
A	0003 through 0005

Thermal shock and immersion: In accordance with MIL-F-15733 except as follows:

Thermal shock: The temperature at step 3 shall be +125°C.

Shock (specified pulse): In accordance with MIL-F-15733 and as follows:

Test condition	Dash number
I	0001 and 0002
A	0003 thru 0005

Vibration, high frequency: In accordance with MIL-F-15733, except test condition D, and after vibration test, filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Radiographic inspection: (applicable to dash number 0001 only). The radiographic inspection shall be conducted as follows:

Filters shall be X-rayed in one plane at 90 degree rotation (perpendicular to the filter longitudinal axis). Any evidence of poor capacitor mounting or uneven soldering of capacitor to case shall be cause for rejection. Rejected units shall be dissected and examined for poor workmanship or uneven soldering. Any defects noted shall require corrective action prior to acceptance of any future lots. Magnification during visual examination shall be two power, minimum. Unless otherwise specified, one radiograph shall be taken of each unit. Filters shall be positioned to yield a longitudinal image of the body.

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be +125°C. No measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: Rated dc voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (FL92).

Dash number	Circuit configuration	Maximum rated current (amperes)	Rated dc voltage (volts)	Maximum voltage drop (volts)	Minimum insertion loss (dB) in accordance with MIL-STD-220 at 25°C 1/						Minimum insertion loss (dB) in accordance with MIL-STD-220 at -55 and +125°C 1/					
					30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz	30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz
0001 2/	L_1	10	28	0.10	15	28	33	44	56	70	13	26	31	42	56	70
0002 2/	L_2	10	30	0.10	15	28	33	44	56	70	--	16	21	32	56	70
0003 2/	L_1	10	28 3/	0.10	15	28	33	44	56	70	--	16	21	32	56	70
0004 2/	L_2	.150	28 3/	1.80	24	52	64	70	70	70	12	40	52	58	70	70
0005 2/	L_2	10	28 3/	0.10	15	28	33	44	56	70	--	16	21	32	56	70

1/ Full-load insertion loss measurements shall be performed over the frequency range of 100 kHz to 20 MHz inclusive. Measurements below or above this frequency range shall be performed at no-load.

2/ Inactive for new design.

3/ Rated voltage at -55°C to +125°C or -55°C to +85°C at 50 V dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

Measurements after 24-hour drying period:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 second. Maximum charging current: 50 mA. Insulation resistance shall be not less than 50 megohms. Insertion loss (check test) shall be measured and shall meet the initial requirement.

Life: Method 108, MIL-STD-202. Test condition D (1,000 hours) for qualification inspection; test condition B (250 hours) for group C inspection. Test temperature +125°C.

Test voltage: 1.4 times rated dc voltage.

Test current: Rated current

Measurements after test:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 second. Maximum charging current: 50 mA.

Insulation resistance shall not be less than 30 percent of the initial requirement.

Insertion loss (check test) shall be measured and shall meet the initial requirements.

QUALITY ASSURANCE PROVISIONS:

Qualification inspection: In accordance with MIL-F-15733.

Quality conformance inspection: In accordance with MIL-F-15733 except as follows:

Group A: In accordance with MIL-F-15733 for dash numbers 0002 through 0005. Group A inspection for dash number 0001 shall be in accordance with table II. Lots having greater than 10 percent rejects shall be considered reject lots. Reject lots, at the option of the manufacturer, may be reworked and submitted to 100 percent, group A inspection of table II.

TABLE II. Group A Inspection.

Test or inspection	AQL (percent defective or 100% inspection)	
Voltage conditioning	100%	
Dielectric withstanding voltage	100%	
Insulation resistance	100%	
Voltage drop	100%	
Insertion loss (check test)	100%	
Radiographic inspection	100%	
	Major	Minor
Visual and mechanical inspection	1.0	4.0

Part or Identifying Number (PIN): M15733/48- (dash number from table I).

(F) Supersession data: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

(F) TABLE III. Supersession data.

Superseded PIN	Superseding specification sheet	Superseding PIN
M15733/48-0001	MIL-F-15733/58	M15733/58-0002
M15733/48-0002	MIL-F-15733/58	M15733/58-0001
M15733/48-0003	MIL-F-15733/56	M15733/58-0004
M15733/48-0004	MIL-F-28861/4	N28861/04-020TB
M15733/48-0005	MIL-F-15733/58	M15733/58-0001

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0346)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.