NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/40B
12 June 1985
SUPERSEDING
MIL-F-15733/40A(USAF)
10 July 1975


PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO INTERFERENCE, STYLE FL35

This specification is approved for use by all Departments and Agencies of the Department of the Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification sheet and the latest issue of MIL-F-15733.

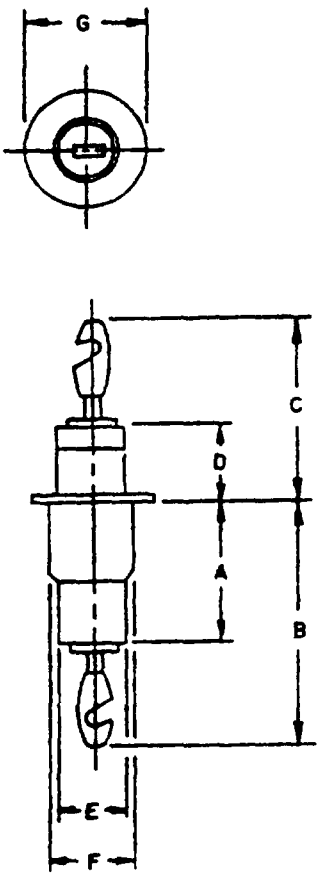



TYPICAL CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.

FIGURE 1. Dimensions and configuration

(B) Denotes changes

FSC 5915

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions. (B)

Type designation 1/ 2/ 3/	Dash no.	A		B		C		D		E		F	G	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max	Min	Max
FL35WW1ED3	0001	.375 (9.53)	.437 (11.10)	.656 (16.66)	.718 (18.21)	.469 (11.86)	.531 (13.49)	.187 (4.75)	.249 (6.32)	.172 (4.37)	.202 (5.13)	.234 (5.94)	.281 (7.14)	.343 (8.71)

1/ The letters "WW" indicate the current rating 25 A and the insertion loss versus frequency characteristics specified in table II.

2/ The letter "D" indicates the operating temperature range -55°C to +125°C.

3/ The type designation does not describe a discrete item. For complete identification, the part number and type designation should be referenced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Configuration and dimensions: See figure and table I.

Weight: 2.7 grams maximum.

Case: Not applicable (metallic mounting eyelet).

Terminals: Solderable (see figure 1)

Operating temperature range: -55°C to +125°C; Temperature characteristic D.

Rated voltage: 500 V dc or 350 V rms to 400 Hz, over the operating temperature range of -55°C to +125°C.

Rated current: 25 amperes, dc or ac(rms).

Insertion loss characteristic: Symbol W (see table II).

Seal: Not applicable.

Capacitance to ground: Method 305, MIL-STD-202. Test frequency: 1,000 Hz ±100 Hz. Measured capacitance shall be at least 3,000 pF.

(B) Temperature rise: +25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test voltage: 1,500 V dc applied for 1 to 5 seconds.

Maximum charging current: 50 mA.

Barometric pressure (reduced): Method 105, test condition D, MIL-STD-202.

Dielectrtic withstanding voltage: In accordance with initial requirements, except that the test voltage shall be 125 percent of the rated dc voltage.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Insulation resistance measured at 25°C between either terminal and the case shall be at least 10 G ohms.

Voltage drop: Not applicable.

Insertion loss: In accordance with MIL-F-15733.

Overload: In accordance with MIL-F-15733.

Measurements at +25°C after test: Insulation resistance shall meet initial requirements.

Terminal strength: Method 211, test condition A, MIL-STD-202.

Applied force: 5 pounds.

Flashpoint of impregnant or potting compound: Not applicable.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Not applicable.

Thermal shock: Not applicable.

Immersion: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of rated voltage between terminals and case.

Measurement after test: Insertion loss (check test) shall meet the initial requirements.

Vibration, high frequency: Method 204, test condition D, MIL-STD-202.

Electrical load: Rated voltage and rated current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent-open or short circuiting.

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C, +3°C, -0°C. No measurement shall be made before and after cycling. Filters shall be tested in accordance with method 106, MIL-STD-202.

Initial measurement: Not applicable.

Polarization voltage: Not applicable.

Loading voltage: Not applicable.

Measurements after 24-hour drying period, at a temperature not to exceed +85°C, and a relative humidity of 50 percent.

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 1 G ohm.

Insertion loss (check test) shall meet the initial requirements.

Life: Method 108, test condition B, MIL-STD-202. Test temperature +125°C.

Test voltage: 1.4 times rated rms voltage, at 125°C.

Test current: 25 amperes.

Measurements after test:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 1 G ohm.

Insertion loss (check test) shall meet the initial requirements.

Ⓑ Marking: Filters shall not be marked. Full marking, in accordance with MIL-F-15733, shall be marked on the unit package.

Part number: M15733/40- (dash number from table II).

Supersession data: This specification includes the requirements of contractor (94580) specification 10029976, -101 Revision B, dated 8 February 1971.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.

TABLE II. Insertion loss versus frequency.

Dash no.	Minimum no-load insertion loss (dB) in accordance with MIL-STD-220, at -25°C				
	50 MHz	100 MHz	200 MHz	500 MHz	1-10 GHz
0001	40	55	65	70	70

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0301)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:20Z
Check the source to verify that this is the current version before use.