NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-15733/44E
11 December 1985
SUPERSEDING
MIL-F-15733/44D(USAF)
5 November 1975

PERFORMANCE SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE,
STYLE FL45

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

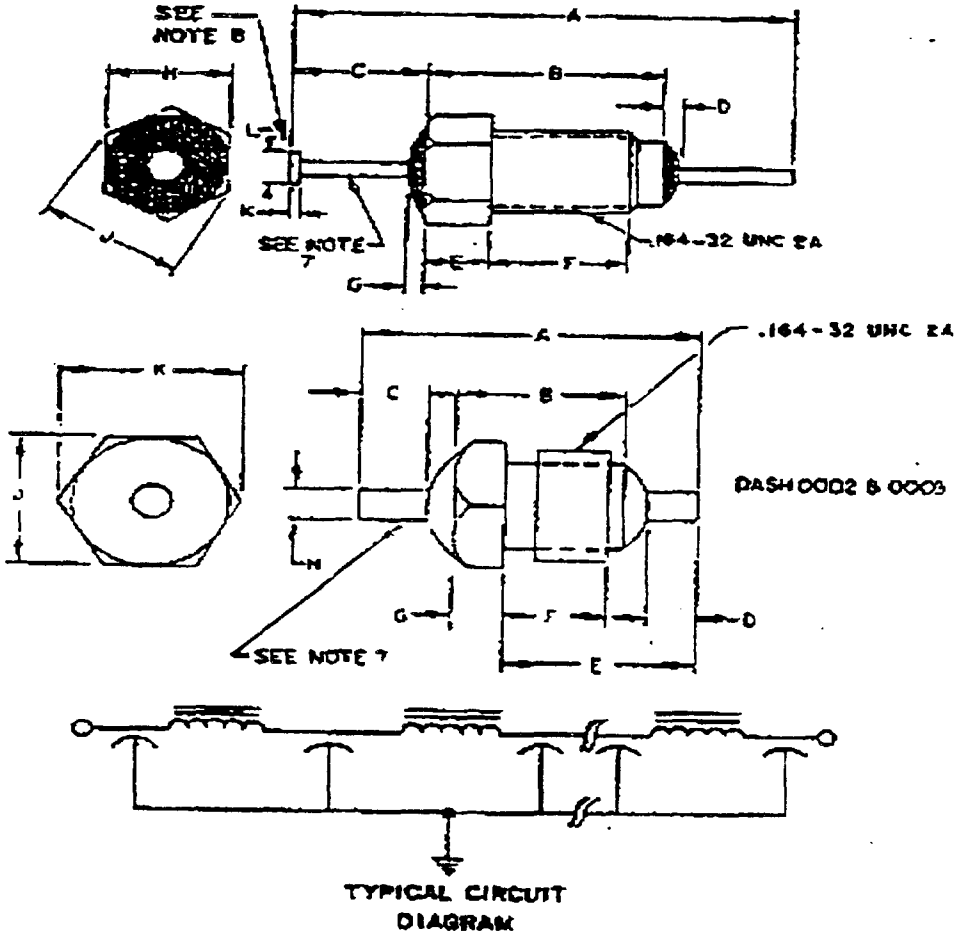


FIGURE 1. Case and circuit configuration

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. Mounting torque 3 to 5 inch pounds.
5. Case is ground terminal.
6. Mounting hardware (lockwasher and hex nut) will be supplied with filter.
7. Leads shall be solid, tinned, AWG 18 (.040 inch)
8. Turret headed terminal optional.

Dash No.	A	B	C		D	E		F		G	H		J	K	L	Weight (grams
	Ref	Ref	Min	Max	Max	Min	Max	Min	Max	Max	Min	Max	Max	Ref	Ref	
0001	.600 (15.24)	.336 (8.53)	.097 (2.46)	.167 (4.24)	.030 (0.76)	.079 (2.01)	.109 (2.77)	.177 (4.50)	.222 (5.64)	.030 (0.76)	.133 (3.38)	.203 (5.16)	.211 (5.36)	.030 (0.76)	.060 (1.52)	1.2
	A		B	C	D	E		F	G	H		J		K		
	Min	Max	Ref	Min	Min	Min	Max	Ref	Ref	Min	Max	Min	Max	Max		
0002 0003	.390 (9.91)	.430 (10.92)	.200 (5.08)	.050 (1.27)	.050 (1.27)	.213 (5.41)	.263 (6.68)	.125 (3.18)	.062 (1.57)	.039 (0.99)	.045 (1.14)	.135 (3.70)	.191 (1.95)	.211 (5.36)	----	3.3

FIGURE 1. Case and circuit configuration - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: See figure 1.

Finish: Tin or tin-lead plating.

Terminals: Solderable.

Operating temperature range: -55°C to + 125°C

Rated voltage: 125 V dc or 85 V rms, dc to 424 Hz.

Rated current: 15 amperes.

Insertion loss: See table I.

Voltage conditioning: Applicable to quality conformance inspection only. 100 percent of each lot of filters shall be subjected to the voltage conditioning test. The test shall be conducted prior to the group A inspection of MIL-F-15733, as follows:

Test temperature: 125°C +4°C, -0°C.

Test voltage: 200 percent of rated dc voltage. Charging current shall not exceed 50 mA.

Points of application of test voltage: Between each terminal and the case.

Duration of exposure to test voltage: 100 ±4 hours.

After completion of exposure, and while filters are stabilized at +125°C, insulation resistance shall be measured. Filters shall then be stabilized at +25°C, and insulation resistance shall be measured.

A reject shall be defined as a filter whose insulation resistance does not meet initial requirements when measured at the +125°C and +25°C conditions as specified in this test. The insulation resistance requirement at +125°C shall not be less than 10 percent of the +25°C insulation resistance requirement. If the total rejects from any particular lot exceed 10 percent, that entire lot shall be rejected.

Capacitance to ground: Method 305, MIL-STD-202.

Dash no.	Dissipation factor	Measured capacitance, -0, +100 percent
-0001	3.0 percent max	3,000 pF
-0002	3.0 percent max	1,500 pF
-0003	3.0 percent max	65 pF

Temperature rise: 25°C, maximum.

Insulation resistance: At +25°C, 500 megohms minimum, at +125°C 100 megohms minimum.

Voltage drop: See table I.

Insertion loss: In accordance with MIL-F-15733.

Terminal strength: Method 211, test condition A, MIL-STD-202.

Applied force: 5 pounds.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202, except that the salt solution concentration shall be 20 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical Characteristics.

	Voltage drop maximum		Minimum insertion loss (dB) in accordance with MIL-STD-220, at +25°C								
Dash No.	Volts dc	Volts ac rms	4 MHz	10 MHz	100 MHz	150 MHz	500 MHz	1 GHz	5 GHz	1000 MHz to 18 GHz	10 GHz to 18 GHz
0001	0.30	0.20	---	10	30	---	55	---	---	65	---
0002	0.10	0.07	3	5	20	---	40	---	---	50	---
0003	0.05	0.03	---	---	---	3	---	16	35	---	42

Minimum insertion loss (dB) in accordance with MIL-STD-220, at -55°C and +125°C									
Dash No.	4 MHz	10 MHz	100 MHz	150 MHz	500 MHz	1 GHz	5 GHz	1000 MHz to 18 GHz	10 GHz to 18 GHz
0001	---	8	28	---	53	---	---	65	---
0002	---	3	18	---	38	---	---	50	---
0003	---	---	---	---	---	16	35	---	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:21Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): Method 213, test condition C, MIL-STD-202.

Electrical load, 100 percent of the rated voltage between terminals and case.

Vibration, high frequency: Method 204, test condition D (20 g), MIL-STD-202.

Electrical load: Rated voltage and rated current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent-open or short-circuiting.

Marking: Each filter shall be marked with the military part number, as shown on figure 2. In addition, full marking in accordance with method I requirements of MIL-STD-1285 shall be marked on each unit package.

Part number: M15733/44- (dash number from table I).




FIGURE 2. Hex flats - expanded view.

QUALITY ASSURANCE PROVISIONS:

Extent of qualification: Qualification testing and approval to M15733/44-0001 shall be sufficient to grant qualification approval to M15733/44-0001 through -0003.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0293)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:21Z
Check the source to verify that this is the current version before use.