NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-15733/46B
10 August 1990
SUPERSEDING
MIL-F-15733/46A(USAF)
5 November 1975

PERFORMANCE SPECIFICATION SHEET

(B) FILTER, RADIO FREQUENCY INTERFERENCE,

SUPPRESSION, STYLE FL41

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

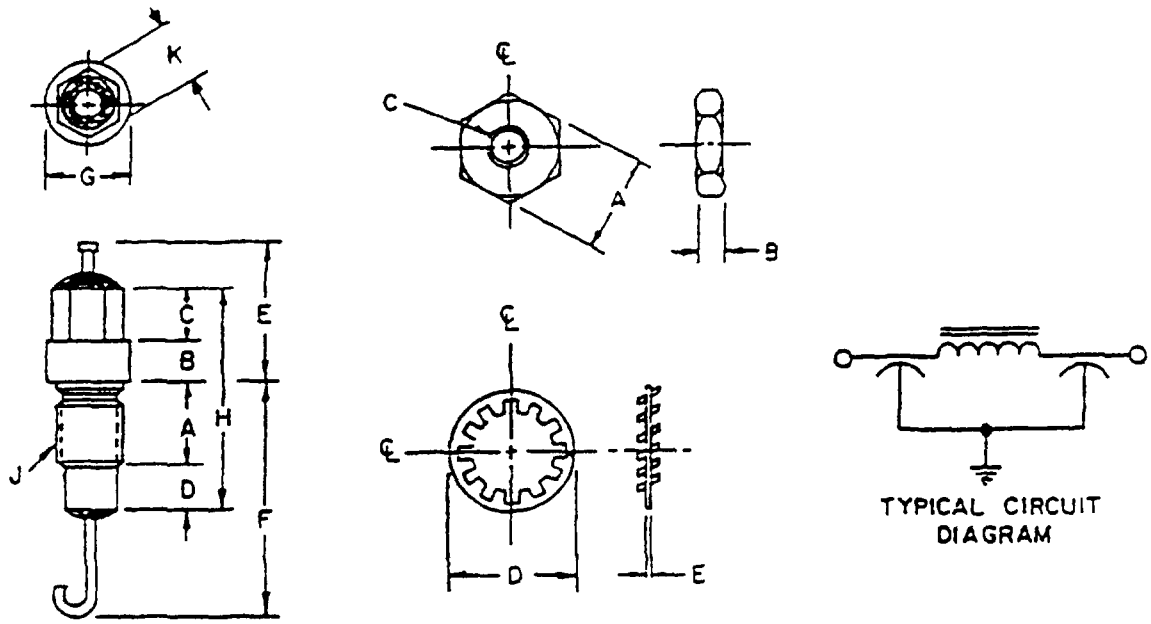


FIGURE 1. Case dimensions and circuit configurations.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Circuit diagram for information only.
4. Recommended mounting torque: 6-8 inches-pounds.
5. Case is ground terminal.
6. Mounting hardware (lockwasher and hex nut) shall be supplied with filter.
7. Turret head is optional.

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions.

Dash number	A	B		C		D		E		F		G		H	J	K
	Reference	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Reference	Thread	
0001*	.250 (6.35)	.110 (2.79)	.140 (3.56)	.141 (3.58)	.171 (4.34)	.141 (3.58)	.171 (4.34)	.406 (10.31)	.468 (11.89)	.656 (16.66)	.718 (18.24)	.236 (5.97)	.265 (6.73)	.687 (17.45)	12-32 UNEF-2A	.187 (4.75)

* Case B

TABLE II. Hardware dimensions.

Dash Number	Hex Nut					Lockwasher				
	A		B	C	D		E			
	Min	Max	Min	Max	Thread	Min	Max	Min	Max	
0001	.235 (5.97)	.265 (6.73)	.070 (1.78)	.080 (2.03)	12-32 UNF-2B	.370 (9.40)	.380 (9.65)	.013 (0.33)	.023 (0.58)	

FIGURE 1. Case dimensions and circuit configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Configuration and dimensions: see figure 1 and tables I and II.

Case: Metal.

Terminals: Solderable.

Rated voltage: 300 V dc over the operating temperature range.

Rated current: 10 amperes, dc.

Insertion loss: Shall be as specified in table III.

Capacitance to ground: Method 305, MIL-STD-202.

Test frequency: 1,000 Hz ±100 Hz.

Measured capacitance shall be at least 4,000 pF.

Temperature rise: +25°C maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202. The test voltage shall be 900 V dc applied for 1.5 seconds. Charging current shall not exceed 50 mA.

Barometric pressure (reduced): Method 105, test condition D, MIL-STD-202.

Dielectric withstanding voltage: In accordance with initial requirements, except that the test voltage shall be 125 percent of the rated dc voltage.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Insulation resistance measured at +25°C between both terminals connected together and the case shall be at least 10 G ohms.

Voltage drop: Not applicable.

Overload: In accordance with MIL-F-15733. Insulation resistance shall meet initial requirements.

Terminal strength: Method 211, test condition A, MIL-STD-202.

Applied force: 5 pounds.

Flashpoint of impregnant or potting compound: Not applicable

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Method 101, test condition B, MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycle: Dielectric withstanding voltage with 90 percent of initial voltage applied for 5 ±1 seconds, insulation resistance shall be not less than 1 G ohm; insertion loss (check test) shall be measured and shall meet the initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of rated voltage between terminals and case. After completion of the shock test, filters shall be subjected to and shall meet the initial requirements of the insertion loss check test.

Vibration, high frequency: Method 204, test condition D, MIL-STD-202.

Electrical load: Rated voltage, and rated current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent-open or short-circuiting.

Moisture resistance: Method 107, test condition B, MIL-STD-202, except that no measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 V dc.

Measurements after 24-hour drying period: Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds. Insulation resistance shall be not less tha 1 G ohm. Insertion loss (check test) shall be measured and shall meet the initial requirements.

Life: Method 108, test condition D, MIL-STD-202. Test temperature +125°C.

Test voltage: 600 V dc.

Test current: 10 amperes.

Measurements after test: Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds. Insulation resistance shall be not less than 1 G ohm. Insertion loss (check test) shall be measured and shall meet the initial requirements.

TABLE III. Insertion loss versus frequency.

Dash number	Minimum no-load insertion loss (dB) in accordance with MIL-STD-220, at +25°C.				
	50 MHz	100 MHz	200 MHz	500 MHz	1-10 GHz
0001	50	65	70	70	70

Marking: Filters shall be marked, as a minimum, with an abbreviated Part or Identifying Number (PIN) as shown on figure 2. Full marking, in accordance with MIL-F-15733, shall be marked on the unit package.

| M1 | 57 | 33 | 46 | 00 | 01 |

FIGURE 2. Example of marking for the abbreviated PIN on the hex flats - expanded view.

PIN: M15733/46-0001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0353)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:22Z
Check the source to verify that this is the current version before use.