INCH-POUND

MIL-F-15733/49G
AMENDMENT 3
15 March 1993
SUPERSEDING
AMENDMENT 2
10 August 1990

MILITARY SPECIFICATION SHEET


FILTERS AND CAPACITORS, RADIO FREQUENCY INTERFERENCE,
HERMETICALLY SEALED, STYLE FL93

This amendment forms a part of MIL-F-15733/49G, dated 2 November 1988, and is approved for use by all Departments and Agencies of the Department of Defense.


PAGE 1

* Changes to inactivation box: After first sentence, add: "On 15 March 1993, P/N M15733/49-0006 is inactive for new design." Also, delete "table II" and substitute "table III".

FIGURE 1, delete the figures for dash number "0007" and dash numbers "0002 through 0006, 0008, and 0010" and substitute:

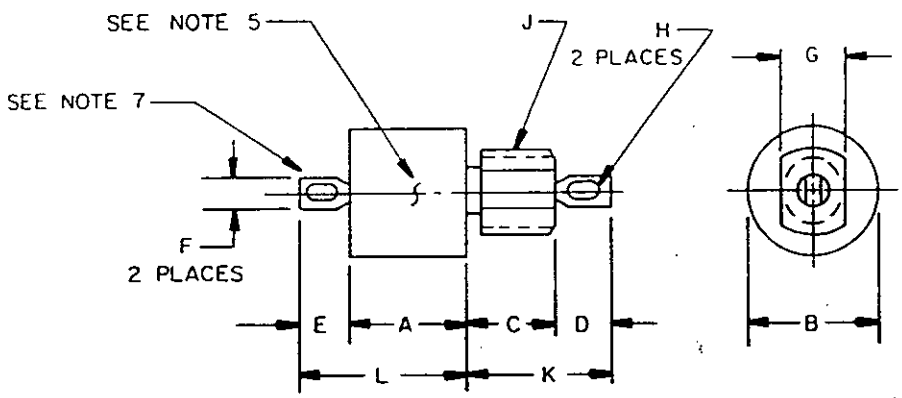

DASH NUMBERS 0002 THROUGH 0006,0008,AND 0010

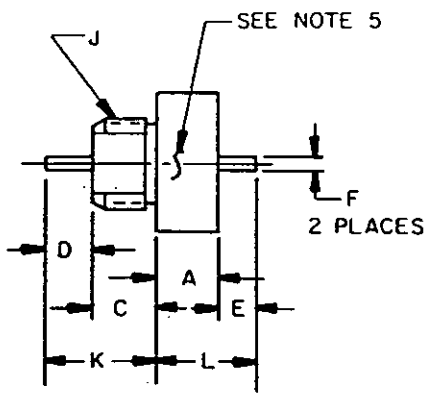

DASH NUMBER 0007

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:23Z
Check the source to verify that this is the current version before use.

Dash no.	A		B		C		D		E		F	G		H	J	K	L
	Min	Max *	Min	Max *	Min	Max	Min *	Max *	Min *	Max *	Typ	Min	Max	Slot or hole ±.010	Mounting thread	Max *	Max *
0001	.257 (6.53)	.319 (8.10)	---	.416 (10.57)	.177 (4.50)	.197 (5.00)	.281 (7.14)	.343 (8.71)	---	---	.040 (1.02)	.190 (4.83)	.210 (5.33)	---	.250-28 UNF-2A	---	---
0002 2/	.560 (14.22)	---	---	.385 (9.78)	.177 (4.50)	.197 (5.00)	.100 (2.54)	---	.140 (3.56)	---	.105 (2.67)	.190 (4.83)	.210 (5.33)	Slot .050 (1.27)	"	.387 (9.83)	.740 (18.80)
0003 2/	.160 (4.06)	---	---	.385 (9.78)	.177 (4.50)	.197 (5.00)	.140 (3.56)	---	.100 (2.54)	---	.105 (2.67)	.190 (4.83)	.210 (5.33)	.060 dia. 1/ (1.52) both ends	"	.357 (9.07)	.370 (9.40)
0004 2/	.160 (4.06)	---	---	.385 (9.78)	.177 (4.50)	.197 (5.00)	.140 (3.56)	---	.100 (2.54)	---	.105 (2.67)	.190 (4.83)	.210 (5.33)	.060 dia. 1/ (1.52) both ends	"	.357 (9.07)	.370 (9.40)
0005 2/	.210 (5.33)	---	---	.385 (9.78)	.302 (7.67)	.322 (8.18)	.140 (3.56)	---	.100 (2.54)	---	.105 (2.67)	.190 (4.83)	.210 (5.33)	.050 x .070 (1.27) x (1.78) or .070 (1.78) dia	"	.482 (12.24)	.420 (10.67)
0006	.160 (4.06)	---	.365 (9.27)	.385 (9.78)	.177 (4.50)	.197 (5.00)	.140 (3.56)	---	.100 (2.54)	---	.105 (2.67)	.190 (4.83)	.210 (5.33)	.050 x .070 (1.27) x (1.78) or .070 (1.78) dia	"	.357 (9.07)	.370 (9.40)
0007	.160 (4.06)	---	.365 (9.27)	.385 (9.78)	.177 (4.50)	.197 (5.00)	.250 (6.35)	---	.250 (6.35)	---	.040 (1.02)	.190 (4.83)	.210 (5.33)	---	"	.467 (11.86)	.450 (11.43)
0008	.406 (10.31)	---	---	.400 (10.16)	.180 (4.57)	.200 (5.08)	.140 (3.56)	---	.140 (3.56)	---	---	.190 (4.83)	.210 (5.33)	.050 x .070 (1.27) x (1.78) or .070 (1.78) dia	"	.360 (9.14)	.576 (14.63)
0010	.500 (12.70)	---	---	.400 (10.16)	.180 (4.57)	.200 (5.08)	.140 (3.56)	---	.140 (3.56)	---	---	.190 (4.83)	.210 (5.33)	.050 x .070 (1.27) x (1.78) or .070 (1.78) dia	"	.360 (9.14)	.680 (17.27)

1/ Slot optional.
2/ Inactive for new design.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:23Z
Check the source to verify that this is the current version before use.

PAGE 4

* Delete insertion loss values for dash number "0010" in Table I and substitute the following values: "6 dB @ 150 kHz, 11 dB @ 300 kHz, 21 dB @ 1 MHz, 41 dB @ 10 MHz, and 70 dB @ 1 GHz." Also change the capacitance tolerance for dash number "0010" to "-0, +150%".

PAGE 6

* Delete the "capacitance tolerance" sentence and substitute: "Capacitance tolerances: +100 percent, -0 percent; except for -0010: +150 percent, -0 percent."

PAGE 9

* Immediately preceding Table II, insert the following:

"Also, initial qualification to MIL-F-15733/49-0007 will be granted based on current qualification to MIL-F-28861/1-001. Initial qualification to MIL-F-15733/49-0008 will be granted based on current qualification to MIL-F-15733/49-0006, MIL-F-28861/1-001, or MIL-F-28861/1-002, as indicated in table II. Extension of qualification from MIL-F-15733/49 or MIL-F-28861/1 to MIL-F-15733/49-0008 is permissible provided that both of the following conditions are met:

a. The MIL-F-15733/49-0008 filter uses the same capacitor that is qualified for use in the MIL-F-15733/49-0006, MIL-F-28861/1-001, or MIL-F-28861/1-002 filters.

b. The physical and electrical requirements of the MIL-F-15733/49-0008 filter are satisfied. Group A inspection data shall be submitted to DESC-EQP for review prior to inclusion on the Qualified Products List."

* Table II, delete and substitute:

"TABLE II. Extension of qualification.

Qualification to MIL-F-28861/1	Will qualify MIL-F-15733/49	Qualification to MIL-F-15733/49	Will qualify MIL-F-15733/49	Qualification to MIL-C-83439/2	Will qualify MIL-F-15733/49
-001	-0003	-0006	-0008	-001	-0008
-001	-0004			-003	-0010
-001	-0006				
-001	-0007				
-001	-0008				
-002	-0008				

"

* Add to Table III, superseded part number "M15733/49-0006" and the corresponding superseding part number "M28861/1-001".

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 59GP-0112)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:23Z
Check the source to verify that this is the current version before use.