INCH-POUND

MIL-PRF-15733/55F
28 October 2008
SUPERSEDING
MIL-PRF-15733/55E
31 March 2003

PERFORMANCE SPECIFICATION SHEET


FILTERS, RADIO INTERFERENCE, HERMETICALLY SEALED
STYLE FL85

*


MIL-PRF-15733/55 IS INACTIVE FOR NEW DESIGN AFTER 28 OCTOBER 2008. FOR NEW DESIGN USE MIL-PRF-15733/73. SEE TABLE IV FOR SUBSTITUTION DATA.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification sheet and MIL-PRF-15733.

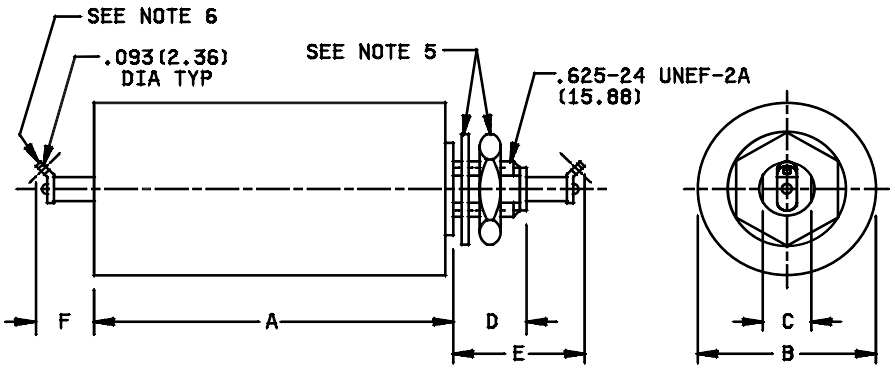


DASH NUMBER 0001,0002, AND 0003




CIRCUIT CONFIGUTATION

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Circuit diagram is for information only.
5. Mounting hardware (internal-tooth lockwasher and hex nut) shall be supplied with filter.
6. Terminal shape and angular orientation optional.

FIGURE 1. Case dimensions and circuit configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions.

| Dash number | A | | B | | C | |
|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max |
| 0001 | 2.907 (73.84) | 3.093 (78.56) | 1.063 (27.00) | 1.187 (30.15) | .526 (13.36) | .536 (13.61) |
| 0002 | 2.907 (73.84) | 3.093 (78.56) | 1.063 (27.00) | 1.187 (30.15) | --- | .531 (13.49) |
| 0003 | 2.31 (58.7) | 2.43 (61.7) | 1.235 (31.37) | 1.265 (32.13) | .365 (9.27) | .385 (9.78) |

| Dash number | D | | E | | F | |
|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max |
| 0001 | .359 (9.12) | .391 (9.93) | .625 (15.88) | .781 (19.84) | .282 (7.16) | .406 (10.31) |
| 0002 | .359 (9.12) | .391 (9.93) | .625 (15.88) | .781 (19.84) | .282 (7.16) | .406 (10.31) |
| 0003 | .47 (11.9) | .53 (13.5) | --- | 1.43 (36.32) | --- | .50 (12.70) |

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Weight: 5.0 ounces, maximum (0001, 0002).

Case: Metallic, hermetically sealed.

Case and hardware finish: In accordance with MIL-PRF-15733. Pure tin finish is prohibited.

Terminals: Solderable (see figure 1).

Operating temperature range: -55°C to +85°C

Rated voltage: 400 V dc or 125 V ac at 400 Hz.

Rated current:

| Amperes dc or ac (rms) | Dash nos. |
|---|---|
| 5 | 0001 |
| 10 | 0002 |
| 2 | 0003 |

DC resistance: 0.072 ohm, maximum.

Insertion loss: See table II.

Seal: In accordance with MIL-PRF-15733.

Capacitance to ground: In accordance with MIL-PRF-15733.

Measured capacitance: Between 0.72 and 1.44 µF (0001 only).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:24Z
Check the source to verify that this is the current version before use.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: In accordance with MIL-PRF-15733. The following details and exceptions shall apply:

Test voltage - shall be 2 times rated dc voltage applied between either terminal and case. The test voltage shall be applied and discharged through a resistance of at least 1 ohm per volt (0001 and 0002 only).

Barometric pressure (reduced): In accordance with MIL-PRF-15733. The following exception shall apply:

Test altitude: 80,000 feet (0.83 inch of mercury) for –0001 and –0002.

Insulation resistance: In accordance with MIL-PRF-15733. Insulation resistance shall be at least 550 megohms for -0001 and -0002 and shall be 1,000 megohm-microfarads minimum for the -0003.

Voltage drop: 1.0 V rms, maximum (-0001 and -0002) and .5 V dc, Max (-0003).

Insertion loss: In accordance with MIL-PRF-15733 and tables II and III.

Terminal strength: In accordance with MIL-PRF-15733 and Method 211, MIL-STD-202; test condition A (pull). The following details shall apply:

Applied force: 5 pounds. The force shall be applied in a direction parallel to the longitudinal axis of the filter. Slight deformation at the solder tab shall be allowable, provided no cracks, fractures or other damage to the terminal result from this test.

Flashpoint of impregnant or potting compound: In accordance with MIL-PRF-15733.

Minimum allowable flashpoint shall be +145°C.

Salt atmosphere (corrosion): In accordance with MIL-PRF-15733 and Method 101, MIL-STD-202, test condition A, (-0001 and -0002); test condition B (-0003).

Shock (specified pulse): In accordance with MIL-PRF-15733 and Method 213, MIL-STD-202; test condition I. The following details and exceptions shall apply:

Mounting: Filters shall be rigidly mounted by the body.

Insertion loss test: Not applicable.

Vibration, high frequency: In accordance with MIL-PRF-15733 and Method 204, MIL-STD-202; test condition B. The following exception shall apply:

Electrical current load shall not be applied to filters during the vibration test.

Life: In accordance with MIL-PRF-15733 and Method 108, MIL-STD-202; test condition B. The following exception shall apply:

Test current: 5 amperes, rms (0001 and 0002) and 2 amperes (0003) at 400 Hz.

Part or Identifying number (PIN): M15733/55- (dash number from table I).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. Insertion-loss (dB) (full load) versus frequency (MHz).

| Dash number | Minimum insertion loss full load in accordance with MIL-STD-220 at +25°C | | | | | |
|---|---|---|---|---|---|---|
| | 0.15 MHz | 0.3 MHz | 0.6 MHz | 1 MHz | 10 MHz | 20 MHz |
| 0001 | 40 | 58 | 76 | 80 | 80 | 80 |
| 0003 | .15 MHz to 10 GHz | | | | | |
| | 60 | | | | | |

TABLE III. Insertion-loss (dB) (no load) versus frequency (MHz).

| Dash number | Minimum insertion loss no load in accordance with MIL-STD-220 at +25°C | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | 0.15 MHz | 0.3 MHz | 0.5 MHz | 1 MHz | 10 MHz | 20 MHz | 40-500 MHz | 100 MHz | 400 MHz | 1000 MHz |
| 0001 | 54 | 73 | 85 | 94 | 84 | 84 | 67 | N/A | N/A | 64 |
| 0002 | 54 | N/A | 85 | 94 | 84 | N/A | N/A | 80 | 80 | N/A |

* TABLE IV. Substitution Data

| Inactive PIN | Superseding PIN |
|---|---|
| M15733/55-0001 | M15733/73-0042 |
| M15733/55-0002 | M15733/73-0045 |
| M15733/55-0003 | M15733/73-0039 or -0040 |

* Referenced documents. In addition to MIL-PRF-15733, this document also references the following:

MIL-PRF-15733/73
MIL-STD-202
MIL-STD-220

* Changes from previous issue. The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5915-2008-019)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:24Z
Check the source to verify that this is the current version before use.