MILITARY SPECIFICATION

HOOD, EXTREME COLD WEATHER, IMPERMEABLE (SHORE)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for an extreme cold weather shore hood which incorporates a waterproof barrier outer material and a synthetic fur ruff protection visor.

1.2 Classification. This hood shall be of one type only in the sizes specified (see 6.2).

Schedule of sizes

Small (6-5/8 to 6-3/4)	Large (7-1/8 to 7-1/4)
Medium (6-7/8 to 7)	Extra Large (7-3/8 to 7-1/2)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-295	- Thread, Nylon
* NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
* TT-E-529	- Enamel, Alkyd, Semigloss
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543	- Buckle, Tongueless and Web Strap
MIL-T-5038	- Tape, Textile and Webbing, Textile, Reinforcing, Nylon
MIL-F-10884	- Fasteners, Snap
* MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-C-17155	- Cloth, Knitted, Nylon, Fleece
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-19759	- Cloth, Coated, Twill, Nylon (Low Count)
MIL-C-43824	- Cloth, Synthetic Fur, Knitted

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

* MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
* MIL-STD-147	- Palletized Unit Loads
MIL-STD-1667	- Provisions for Evaluating Quality of Hoods; Cold Weather, Extreme Cold Weather, and Flyers

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20242-0001)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Buttons

(Applications for copies should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample units(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the outershell shall be chloroprene coated, nylon twill, conforming to type I of MIL-C-19759.

* 3.3.2 Binding. The binding for the visor shall be made from the basic material specified in 3.3.1. The strips shall be bias-cut, 1 to 1-1/4 inch wide on a 45 (± 5) degree angle and shall be joined by using seam type SSa-1 and stitch type 301, with 10 to 14 stitches per inch in accordance with Federal Standard 751. The finished seams shall measure 1/8 inch wide and shall be spread out.

3.3.3 Lining. The material for lining the inside of the hood shall be cloth, nylon, fleece, knitted, conforming to type I of MIL-C-17155.

3.3.4 Interlining for visor. The material for interlining the visor shall be cloth, numbered duck, plied-yarns, unbleached or white, conforming to type I, hard texture, number 6 of CCC-C-419.

3.3.5 Button loops. The material for the button loops shall be braid, textile, cotton, tubular, conforming to type V, class 1 of MIL-B-371, except that the dyed yarn need not be fast to bleaching. The color shall approximate the shade of the basic material. The use of sulphur dyes is not permitted.

3.3.6 Thread, nylon. The thread for seaming and stitching the hood shall be types I and II, classes 1 or 2, thread size B and E; or type III, thread size B and E of V-T-295, except that only colorfastness to laundering and wet dry cleaning shall apply. The thread shall be dyed Olive Drab, S-1, C.A. 66022. Either type III may be used for the needle and bobbin or a combination of type II for the needle and type I for the bobbin may be used.

3.3.7 Webbing. The material for the hood and underarm adjustments (take-up) straps shall be cotton, type IIa, class 3, 3/4 inch wide conforming to MIL-W-530. The color shall approximate the shade of the basic material.

3.3.8 Synthetic fur ruff. The synthetic fur ruff for the face opening shall conform to MIL-C-43824.

* 3.3.9 Buttons, plastic. The buttons shall be 45-line conforming to type II, class D, style 20 and 21 (with stud) of V-B-871. The color of the buttons shall be Green AF, Cable No. 62017 in accordance with the Standard Shades for Buttons and shall have a glossy finish.

* 3.3.10 Buckle. The buckle for the adjustment (take-up) straps on the hood and shoulder skirt, shall be type II, class 1, style 4, construction A or B, size 3/4 inch conforming to MIL-B-543, except that the buckle shall have a baked-on enamel finish conforming to type II of TT-E-529 (see 4.4.1). The color shall approximate the shade of the basic material.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

3.3.11 Slide fastener. The slide fastener for the front closure shall be type IV, style 8, size M conforming to V-F-106. All the components of the slide fastener shall be brass or bronze and shall be purchased from the same contractor (see 4.4.1). The length of the slide fastener shall be 9-1/2 to 10 inches long.

* 3.3.11.1 Tape and thong for slide fastener. The tape for the slide fastener shall be cotton or synthetic or a combination. The thong for the slide fastener shall be nylon reinforcing tape, type III, 3/8 inch wide conforming to MIL-T-5038. The finished length of the thong after assembly shall be 4-1/2 (± 1/2) inches. The color of the tapes shall approximate the shade of the basic material and show good fastness to laundering and wet dry cleaning as specified in V-F-106.

* 3.3.12 Snap fasteners. The snap fasteners used to secure the underarm adjustment straps to the front corners of shoulder skirt shall be style 2, 20-line, finish 3, conforming to MIL-F-10884, except that the button cap shell shall have a baked-on enamel finish conforming to type II of TT-E-529 (see 4.4.1). The color shall approximate the shade of the basic material.

* 3.3.13 Wire. The wire, for maintaining the circular shape, shall be polyethylene coated, bright, basic steel, low carbon annealed after drawing. The polyethylene strip shall be 7/16 inches wide with a thick section 1/4 inch wide and a thin section 3/16 inch wide. The overall thickness of the thick section shall be 0.070 inch, and the thin section shall be 0.010 inch. Centered in the thick section shall be two parallel flat wires which are 0.020 by 0.045 inch and spaced approximately 0.030 inch from each other. The polyethylene coating shall not crack or stiffen when folded and creased sharply after being subjected to -40 degrees F for 2 hours (see 4.4.1). As an alternate, a solid conductor 14AWG (American Wire Gauge) copper electrical wire with thermoplastic PVC insulation, type TW, may be used.

* 3.3.14 Combination label. Each hood shall have a combination identification size and instruction label conforming to type I, class 14 of DDD-L-20, except that the printed surface of the label shall be impregnated or surface coated with finishing compound after printing. The label printing shall show fastness to laundering and dry-cleaning and shall bear the following inscription:

HOOD, EXTREME COLD WEATHER, IMPERMEABLE (SHORE)
BASIC MATERIAL: 100% NYLON
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8415-00-000-0000 (EXAMPLE)
SIZE: MEDIUM (6-7/8 TO 7) (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

Hood should be worn over other headwear. Shoulder skirt may be worn under or over a jacket. Underarm straps amd back strap are adjustable for fit. Fur ruff protects against extreme cold/high winds, may be shaped to needs; fold back when not in use.

This hood may be laundered (water temperature not over 130°F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

3.4 Design. The hood shall have a visor with a synthetic fur ruff, shoulder skirt, slide fastener securing front closure, and underarm and back of hood adjustment straps. The hood shall be constructed of a coated nylon fabric with the coating on the underside and the inside of the hood (headpiece) and neck band lined with nylon knitted fleece (see Figure 1).

3.4.1 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. The patterns allow 3/8 inch seam allowance for outershell and 1/2 inch seam allowance for lining, except as otherwise indicated in Table I.

3.5.1 List of pattern parts. The component parts for the hood shall be cut from materials as specified below:

Material	Nomenclature of pattern parts	Cut parts
Cloth, coated, nylon twill, low count	Hood, sides	2
	Hood, center	1
	Neck band	1
	Shoulder skirt	4
	Visor	2
Cloth, nylon fleece, knitted	Hood, sides	2
	Hood, center	1
	Neck band	1
Cloth, cotton, duck	Visor interlining (wide)	1
	Visor interlining (narrow)	1

* 3.6 Stitches, seams, and stitchings. Stitch, seam, and stitching types as specified in Table I, shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams and stitches are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Unless otherwise specified, edgestitching shall not be less than 3/16 inch nor more than 1/4 inch. Raise stitching shall be 1/16 inch from folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

3.6.1 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backstitched or tacked not less than 3/8 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches shall be repaired by using 301 stitch type. The ends of a continuous line of stitching (except label stitching) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operations requirements. The hood shall be constructed in accordance with all operations listed in Table I. The contractor is not required to follow the exact sequence of operations listed, provided the finished hoods are identical with those produced by following the exact sequence as shown in Table I.

3.7.1 Shade and size marking. The component parts shall be marked, ticketed or bundled to insure a uniform shade and size throughout the hood. Any method may be used except:

a. Corrosive metal fastening devices
b. Sew-on type tickets
c. Adhesive type tickets which show discoloration and the adhesive mass adheres to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is acceptable provided the numbers do not show through the outside of the hood and numbers shall be covered by the seam allowance.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL. BOB/ LPR
1.	Cutting. a. The hood shall be cut in strict accordance with patterns furnished, which shall show size, shape, placement of notches, directional lines for cutting, and instructions for the proper assembly of all component parts. b. All component parts of the coated nylon material shall be cut from one piece of material except the binding, underply of shoulder skirt and visor which may be cut from ends. Parts cut from ends shall approximate the shade of the outside of finished hood. c. All component parts of the lining (fleece) shall be cut from one piece of material. d. Cut a rectangular piece of synthetic fur knitted cloth 1-1/2 (± 1/4) inches wide and 23-3/4 (± 1/4) inches long (lengthwise (wales) direction) for use as ruff. There shall be no piecing.				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1667 shall be removed from production and replaced with nondefective and properly matched components.				
3.	Shade and size marking (see 3.7.1). a. All parts of the basic material and lining shall be marked, ticketed, or bundled to insure a uniform shade and proper assembly throughout the hood, except interlining and parts cut from ends.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. The use of non-corrosive metal fastening devices for shade marking is permitted on the lining (fleece) material only.					
4.	Attach wire and interlining to visor.	301	LSa-1	10-14	111B or 11B	111B or 1B
*	a. Stitch the thin area of the polyethylene portion of the polyethylene encased wire to the wider interlining as indicated by marks on pattern.					
*	b. When the alternate copper wire of 3.3.13 is used, the wire shall be inserted into a strip of binding (see 3.3.2) folded in half along the length with the coated sides face to face. The binding shall extend 1/2 to 1 inch passed each end of the wire. The binding and wire combination shall be stitched to the wider interlining as indicated by marks on patterns. The stitching shall be as close as possible to the wire. Place a 1/2 inch bartack across each end of binding 1/4 to 1/2 inch from end of wire.	301 and Brtck	smlr to LSd-1	10-14 28 per brtck	111B or 11B 111B or 11B	111B or 1B 111B or 1B
	c. Stitch all four sides 1/8 inch from edge, the wider interlining to the coated side of the top visor ply as indicated by marks on the pattern.	301	LSa-1	10-14	III B or II B	III B or I B
	d. Stitch all four sides 1/8 inch from edge of the narrower interlining to the coated side of the same top visor ply in 4.c, as indicated by marks on pattern. There shall be 1/8 to 1/4 inch (space) between the inside edges of the interlining pieces.	301	LSa-1	10-14	III B or II B	III B or I B
	e. Stitch both plies of the visor on all four sides 1/8 inch from edge with the interlining pieces between the coated side of the material.	301	SSa-1	10-14	III B or II B	III B or I B
	f. Stitch the both plies of the visor between the inner edges of the interlining pieces. The row of stitching shall not be caught on either edge.	301	SSv-1	10-14	III B or II B	III B or I B

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
5.	Bind visor and attach loops.					
	a. Cut two lengths of braid 3-3/4 to 4 inches.					
	b. Bind the edges of the visor simultaneously catching the abutted ends of two loops in the left end of visor. The formed loops shall face the top visor ply containing the interlining pieces.	301	BSc-1	10-14	III B or II B	III B or I B
	c. The finished binding shall measure 5/16 to 3/8 inch wide, have not more than one joining seam with the ends turned at an angle and caught in the stitching along brow edge.					
	d. The formed loops shall have a free opening of 1-1/2 (± 1/8) inches with the loops positioned so that they are 1-1/8 (± 1/8) inch from the inner and outer bound edges of visor when measured from the center between the two ends of loop.					
	e. The ends of the loops may be tacked prior to the binding operation.	301	SSa-1	10-14	III B or II B	III B or I B
6.	Attach the ruff to assembled visor.					
	a. Mark the location of the ruff on the under ply of the assembled visor as follows: 1/2 to 5/8 inch from right end and parallel 1/2 to 5/8 inch from outer bound edge. The ruff shall end 2 (± 1/4) inches from the left end.					
	b. Stitch 1/16 to 1/8 inch from edge, the ruff on all four sides to the bottom visor ply in accordance with location specified in operation 6a.	301	LSbj-1	10-14	III B or II B	III B or I B

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Make darts in hood side lining.					
	a. Stitch cut darts in each hood side lining section 1/4 to 5/16 inch from raw edges. Spread the seam open and flat and stitch 1/16 to 1/8 inch from folded edge on each side of seam.	301	SSz-3	10-14	III B or II B	III B or I B
	b. The finished darts shall measure 2 (± 1/4) inches deep.					
8.	Assemble hood lining sections, attach label, and join lining sections of hood and neck band.					
	a. Join the center and sides of the hood lining sections. Spread the seams open and flat and stitch 1/16 to 1/8 inch from folded edge on each side of seam.	301	SSz-3	10-14	III B or II B	III B or I B
	b. Set a combination label to the fleece side of the neck band lining section centered and with the edge of label 4 (± 1/2) inches from finished left end. Stitch the label on all four sides not more than 1/8 inch from edge.	301	LSbj-1	10-14	III B or II B	III B or I B
	c. Join the assembled hood lining sections and neck band lining section in accordance with notches on pattern. Spread the seam open and flat and stitch 1/16 to 1/8 inch from folded edge on each side of seam.	301	SSz-3	10-14	III B or II B	III B or I B
9.	Make darts in outershell of hood.					
	a. Stitch dart (cut) in each hood side outershell section 1/4 to 5/16 inch from edge. Turn seam towards bottom of hood and raisestitch 1/16 inch from folded edge.	301	LSq-2	10-14	III B or II B	III B or I B
	b. The finished darts shall measure 2 (± 1/4) inches deep.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
10.	Assemble hood outershell sections and join outershell sections of hood and neck.					
	a. Stitch the center and sides of hood outershell sections, face to face, 5/16 inch from rav edges.	301	LSq-2(a)	10-14	III B or II B	III B or I B
	b. Turn seams towards center and raise stitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	III B or II B	III B or I B
	c. Stitch the assembled hood and neck band outershell sections in accordance with notches on patterns, face to face, 5/16 inch from rav edges.	301	LSQ-2(a)	10-14	III B or II B	III B or I B
	d. Turn seam against head part and raise stitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	III B or II B	III B or I B
11.	Make webbing underarm and hood adjustment strap assemblies.					
	a. Thread, fold, stitch and position the hood and underarm adjustment strap assemblies in accordance with operations 15a, 12c, and Figures 1, 2, and 3.					
	b. For the finished measurements of the assembled hood adjustment and underarm adjustment (take-up) straps, see operations 15b, and 12e, respectively.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make twill shoulder skirt.					
	a. Stitch the center back twill shoulder skirt sections respectively, face to face, 3/8 inch from raw edges.	301	LSq-2(a)	10-14	III B or II B	III B or I B
	b. Turn seam against right section (finished hood as worn) and raise stitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	III B or II B	III B or I B
	c. Stitch twill shoulder skirt sections, face to face, 3/8 inch from raw edges, leaving top edge open. Prior to the seaming operation place the end of each long underarm adjustment strap on each bottom corner of shoulder skirt the depth of seam to be stitched.	301	SSe-2(a)	10-14	III B or II B	III B or I B
	d. Trim corners and the ends of webbing, turn to finished position and edgestitch (except opened edge) 3/16 to 1/4 inch from folded edge.	301	Se-2(b)	10-14	III B or II B	III B or I B
	e. The finished lengths of the underarm adjustment strap assembly for all sizes shall be as follows: Short strap - 1-1/2 (± 1/4) inches Long strap - 21-1/2 (± 1/2) inches					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	NOTE: Measurements shall be taken as follows:					
	Short strap shall be measured from fold over buckle bar to fold of hem containing snap.					
	Long strap shall be measured from edge of finished shoulder skirt to hemmed end on opposite end of webbing.					
13.	Join neck band and assembled shoulder skirt. a. Form an inverted pleat, to the depth as indicated by notches on pattern in the center bottom of the face and fleece sides of the neck band and stay stitch across pleat at bottom edges.					
	b. Insert the assembled shoulder skirt between the outershell and fleece plies at the bottom of neck band and stitch together.	301	SSq-2(a)	10-14	III B or II B	III B or I B
	c. Stitch outershell assembly of neck band and hood to fleece lining along outer edges of brow, leaving a section of brow edge open.	301	SSe-2(a)	10-14	III B or II B	III B or I B
	d. Turn hood to finished position through the brow opening and stitch 3/16 to 1/4 inch from folded edge. Catch the open brow seam in the stitching.	301	SSq-2(b) and SSe-2(b) and SSc-1	10-14	III B or II B	III B or I B

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL.	THREAD BOB/ LPR
14.	Attach visor. a. Center and stitch 1/4 inch from bound edge, the visor to the assembled head sections with the bound edge of the visor 3/8 (± 1/8) inch from the brow edge; starting 2 (± 1/4) inches from one end of visor and finish the row of stitching the same distance from other end of visor. Turn visor and topstitch 1/4 inch from the turned edge. b. The finished visor shall measure 4-1/2 (± 1/4) inches wide.	301	LSq-2	10-14	III B or II B	III B or I B
15.	Attach hood adjustment strap assembly. a. Position and stitch hood adjustment strap assembly to bottom corners of seams joining headpiece to neck band and center to side headpieces as indicated in Figures 1 and 2. b. The finished length of the hood adjustment strap assembly for all sizes shall be as follows: Short strap - 2-1/8 (± 1/8) inches Long strap - 6-3/4 (± 1/4) inches Note: Measurements shall be taken as follows: Short strap shall be measured from folded edge to fold over buckle bar. Long strap shall be measured from outer folded edge of hem to turn under.	301	LSd-1	8-12 (Box-tacker)	III B or II B	III B or I B
16.	Bartacking. a. With the visor folded forward, stitch a 3/8 to 1/2 inch bartack at each end of visor attachment. The bartack shall run from visor attachment top stitching onto the side headpiece for a minimum of 1/8 inch.	Bartack		28 per bartack	III B or II B	III B or I B

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Stitch a 3/8 to 1/2 inch bartack across the width of each loop through all plies of material, superimposed on binding stitching.	Bartack		28 per brtck	III B or II B	III B or I B
17.	Attach snap fasteners.					
	a. Attach a snap fastener stud and post to the front and bottom edges of each shoulder skirt 1/2 (± 1/8) inch from each finished edge (see figure 1). The stud part of the snap fastener shall be on the top ply (as worn).					
	b. Attach a 20-line snap fastener, cap and socket centered through the free hem of the short underarm adjustment strap assembly.					
	c. All measurements for the location of snap fastener components shall be taken from the center of snap fastener.					
18.	Attach slide fastener to center front opening.					
	a. Double row of stitching attaching slide fastener tapes to assembled hood shall be through all plies of material and with outer row of stitching 1/16 inch from edge of tape.					
	b. The slide fastener tapes shall be the same length as the finished center front opening with the top end of tapes turned under 1/2 to 5/8 inch and caught in the double row of stitching.					
	c. Double stitch 3/16 to 1/4 inch gauge the right half of the slide fastener superimposed on the outside plies (as worn) with scoops of slide fastener 5/8 to 3/4 inch from finished (right) front edge.	301	LSa-2	10-14	III E or II E	III E or I E
	d. Double stitch 3/16 to 1/4 inch gauge the left half of slide fastener superimposed on the underplies with scoops of slide fastener 5/8 to 3/4 inch from finished (left) front edge.	301	LSa-2	10-14	III E or II E	III E or I E

Source: https://assist.dla.mil -- Downloaded: 2026l0-18T09:42Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Stitch a 3/8 to 1/2 inch vertical bartack on each slide fastener tape to hood near the bottom of tape and between te two rows of stitching.	Bartack		28 per bartack	III B or II B	III B or I B
	f. Thread thong through the eyelet in the slide fastener short tab pull and knot both ends of the tape securely together.					
19.	Attach buttons to visor.					
	a. Prior to attaching the buttons, close slide fastener and overlap the left end of the visor on the right end of visor. The flap extension covering the slide fastener and overlapped ends of the visor shall be positioned in such a manner to provide proper setting of the buttons.					
	b. Hand sewn buttons shall be shank wrapped with not less than 4 wraps. Thread ends shall be tacked off with a knot.					
	c. Sew two 45-line buttons through all fabrics (except synthetic fur ruff).	301 or		14-16	III B or II B	III B or I B
		Hand		4 dbl not incl shank wrap-ing	III B or II B	
20.	Clean, examine, and fold hood.					
	a. Trim all ends of thread and remove loose thread.					
	* NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
	b. Remove all spots and stains.					
	c. Remove all shade tickets.					
	d. Close slide fastener and fold hood as specified in Section 5.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished hood shall be in accordance with Table II. All measurements and tolerances are expressed in inches. The measurements and tolerances are expressed in inches. The measurements shall be taken as indicated below (see Figure 1).

Table II - Sizes and measurements of hood

	Hood center (A)	Center width (B)	Neck band width (C)	Shoulder skirt width (D)
Small (6-5/8 to 6-3/4)	14	5	5-3/8	5-3/4
Medium (6-7/8 to 7)	14-1/2	5-1/4	5-3/8	5-3/4
Large (7-1/8 to 7-1/4)	15	5-1/2	5-3/8	5-3/4
Extra large (7-3/8 to 7-1/2	15-1/2	5-3/4	5-3/8	5-3/4
Tolerance	± .3/8	± 3/16	± 1/4	± 1/4

Hood center (A) - Measurement shall be taken along centerline length of hood center section from junction of visor folded seam edge to folded seam edge over neck band.

Center width (B) - Measurement shall be taken across the width of hood center section at the top (of hood) at the widest point from folded seam edge to folded seam edge.

Neck band width (C) - Measurement shall be taken at the neck width of finished neck band along a line projected from the center back seam of shoulder skirt from folded seam edge on shoulder skirt to folded edge at base of center hood section.

Shoulder skirt width (D) - Measurement shall be taken at the shoulder width of the finished shoulder skirt section along the joined center back seam of shoulder skirt from folded seam edge of neck band to bottom of shoulder skirt.

3.9 Workmanship. The finished hood shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil - Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1667 and MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance shall be furnished for the enamel finish on the buckle and snap fasteners (see 3.3.10 and 3.3.12), the characteristics of the wire (see 3.3.13), and all components of the slide fastener shall be furnished from the same contractor (see 3.3.11).

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with the provisions of MIL-STD-1667.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. Packaging inpection shall be in accordance wih MIL-STD-1667.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the Acceptable Quality Level, AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Five (5) hoods, of one size only, shall be nested together as follows: Place the under arm adjustment straps inside each hood, then fit one hood within the other with the visors facing the same direction. The five (5) nested hoods shall be neatly stacked to form an even bundle and the resultant bundle shall be securely tied at each end with cotton tape or twine.

5.1.2 Level C . Hoods shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Ten (10) hoods (2 packages of 5 hoods each), of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be stacked flat, two in length, one in width and one in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B. Ten (10) hoods (2 packages of 5 hoods each), of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be stacked flat, two in length, one in width and one in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The hood is intended to be worn as an outer garment in cold and wet/cold areas in conjunction with the extreme cold weather jacket and trousers.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:42Z
Check the source to verify that this is the current version before use.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Size required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of packaging and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

* 6.4 Recycled materials. It is encouraged that recycled materials be used when practical as long as it meets the requirements of this specification.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.

Head protector, fur ruff visor
Head protector, waterproof barrier
Head protector, wet/cold

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No.8405-N666

User Activities:
Navy - YD, CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.



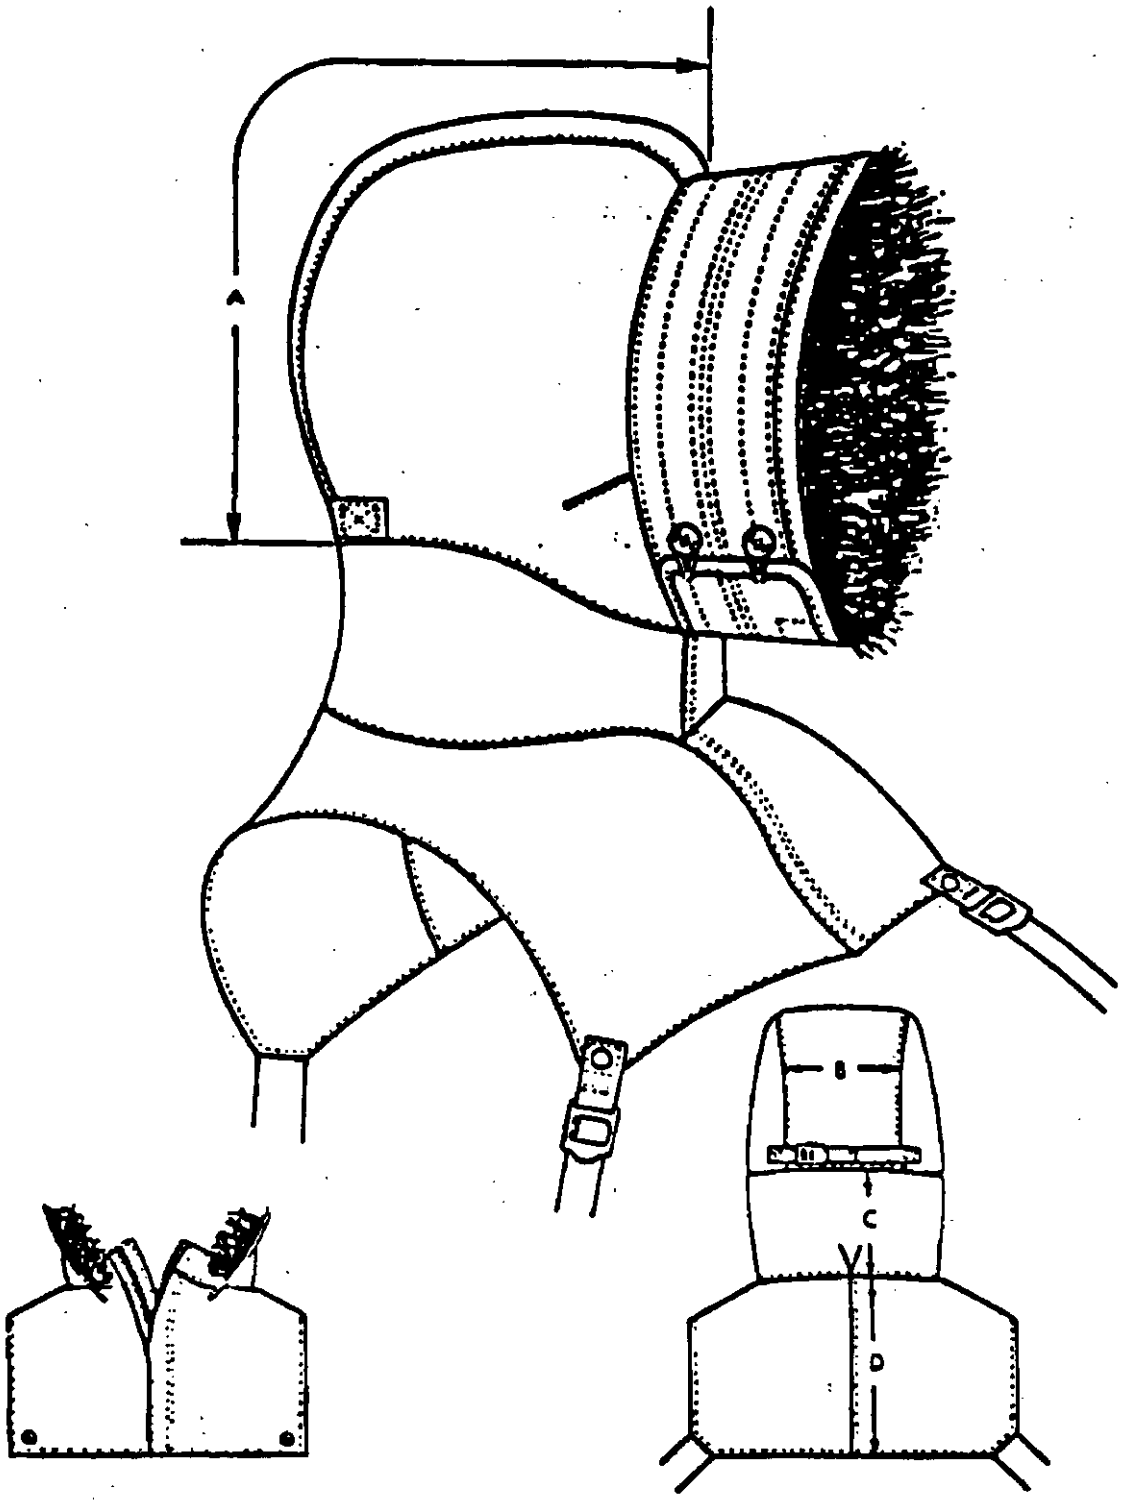


Figure 1 - Hood, Cold Weather, Impermeable (Shore)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

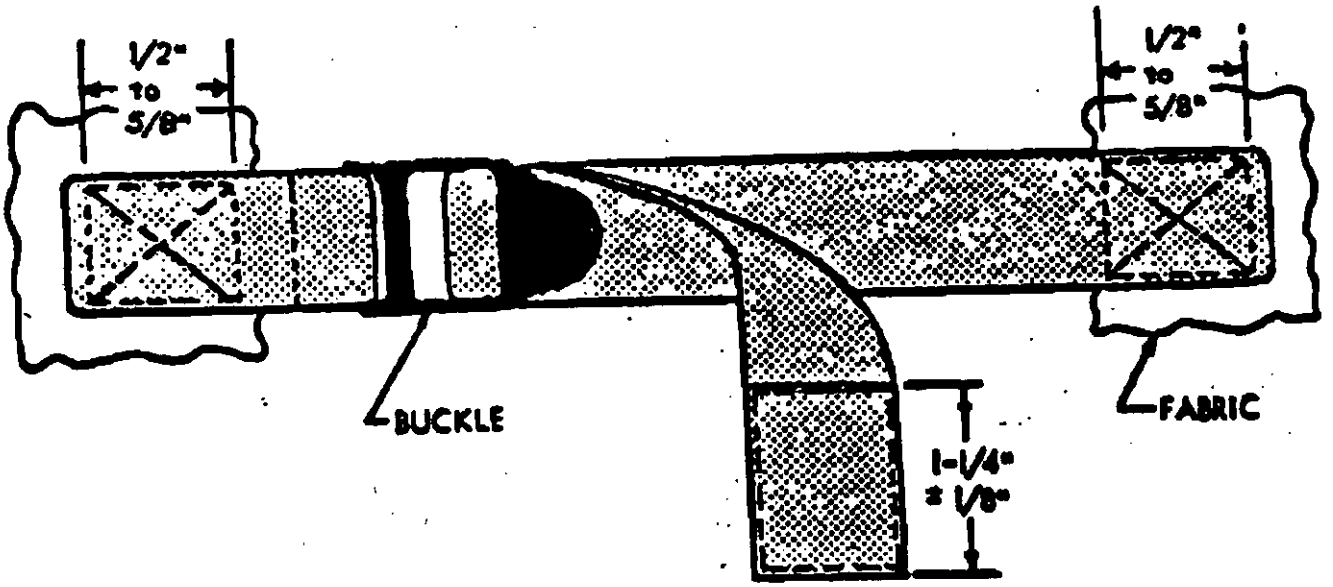


TOP VIEW

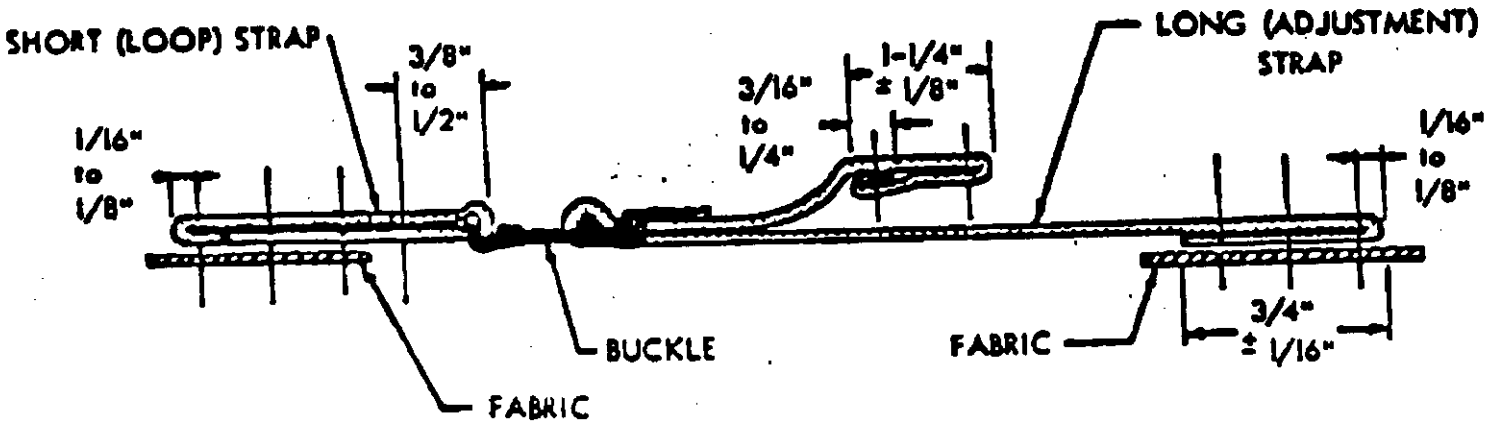


SIDE VIEW

FIGURE 2 - HOOD ADJUSTMENT STRAP AND BUCKLE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:42Z
Check the source to verify that this is the current version before use.

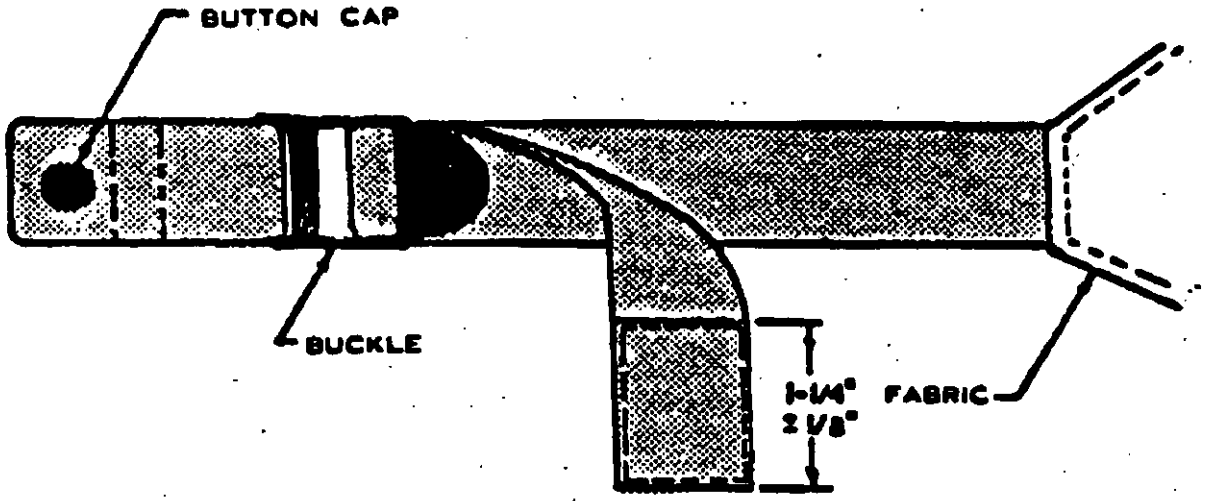

TOP VIEW

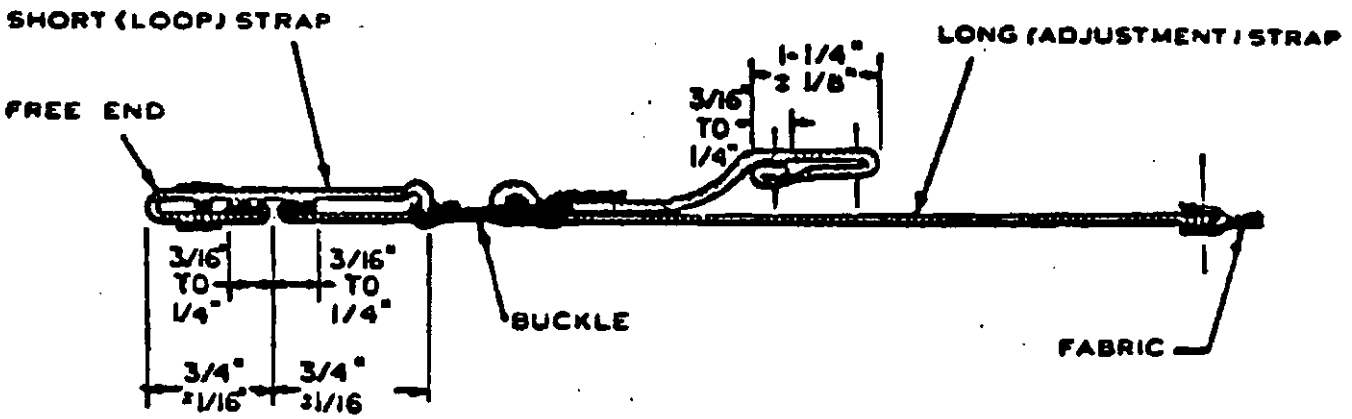

SIDE VIEW

FIGURE 3 UNDERARM ADJUSTMENT STRAP AND BUCKLE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 20261O-18T09:42Z
Check the source to verify that this is the current version before use.