MIL-L-17080C(SHIPS)
16 September 1968
SUPERSEDING
MIL-L-17080B(SHIPS)
3 December 1964
(See 6.3)

MILITARY SPECIFICATION

LOUDSPEAKERS, PERMANENT MAGNET

FOR SHIBOARD ENTERTAINMENT SYSTEMS

1. SCOPE

1.1 This specification covers permanent magnet loudspeakers for use with shipboard motion picture and entertainment systems.

1.2 Classification.- Loudspeakers shall be of the following types, as specified (see 6.1):

Type I	-	Loudspeaker	- LS-443/WIH
Type II	-	Loudspeaker	- LS-444/WIH
Type III	-	Loudspeaker	- LS-543/SIC

2 APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-T-27 - Transformers and Inductors (Audio, Power, and High Power Pulse) General Specification for.
MIL-S-901 - Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-I-983 - Interior Communication Equipment, Naval Shipboard Basic Design Requirements for
MIL-D-1000 - Drawings, Engineering and Associated Lists.
MIL-S-3786 - Switches, Rotary (Circuit Selector, Low Current Capacity) General Specification for.
MIL-E-17555 - Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of.
MIL-L-24223 - Loudspeaker, Permanent Magnet, Shipboard Announcing Systems.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal, shall apply:

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.

3. REQUIREMENTS

3.1 Qualification.- The loudspeakers furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.2).

3.2 Description.- Loudspeakers furnished under this specification shall be of the permanent magnet direct radiator type. The loudspeaker enclosure, designed for bulkhead mounting, shall contain a loudspeaker unit with a cone having a nominal 8 inch diameter, a line matching transformer, a volume selector switch and a channel selector switch. Type LS-443 ( )/WIH and LS-444 ( )/ WIH loudspeakers are identical except for the difference in mounting dimensions indicated by figure 1. The type LS-543 ( )/SIC loudspeaker includes a loudspeaker unit designed to limit stray magnetic field produced by the loudspeaker magnet and is identical to the LS-444/WIH except for the loudspeaker unit.

3.3 General features.–Loudspeaker units shall be in accordance with the following paragraphs of MIL-I-983 in addition to the requirements specified herein. Whenever a requirement of MIL-I-983 conflicts with a requirement of this specification, the requirement of this specification shall govern.

General requirements
Definitions
Materials, general
Substitution of (equal or superior) materials or parts
Fungus-inert materials
Flammable materials
Toxic materials
Wood
Aluminum
Magnesium
Springs (material)
Plastics
Painting
Protection against corrosion
Bolts, machine screws, studs and nuts
Locking devices
Washers
Parts-electrical-general
Transformers and inductors
Electrical tapes
Switches
Enclosure-accessibility
Enclosure mounting
Stiffening grooves
Through bolting
Threaded devices
Rounded corners and edges
Drilled and tapped holes
Temperature and humidity (Special cold limit applies)
Accelerated life
Shock, vibration and inclination (nonvital vibration test required)
Soldering
Electrical parts mounting
Terminal boards and terminals
Wiring
Electrical insulation
Dielectric strength and insulation resistance clearances

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

Interchangeability and standardization
Repair parts (electronic)
Designation and marking
Workmanship

3.4 Loudspeaker enclosure.-The loudspeaker enclosure shall be designed with three 1/2-inch diameter holes in the back plate for bulkhead mounting. Mounting details shall be as shown on figure 1. Except for the increased depth incident to opening the hinged front cover 90 degrees and the clearance dimensions required to install, remove, or service the loudspeaker, the enclosure shall not exceed the following dimensions:

Width - 15 inches.
Height - 15 inches.
Depth - 9 inches.

3.4.1 Enclosure material.-The enclosure shall be constructed of metal or of fibrous glass reinforced polyester plastic.

3.4.2 Enclosure openings.-The enclosure shall have an opening for the loudspeaker face. This opening, and any port openings required to meet the specified performance characteristics, shall be covered with metal mesh or perforated metal not less than 0.040 inch thick. Mesh openings or perforations shall be not larger that 1/16 + 1/64 inch. Metal shall be anodized aluminum or corrosion-resistant steel painted to withstand long-term exposure to corrosive atmospheres.

3.4.3 Enclosure construction. - The enclosure shall be provided with a hinged front cover, held closed by a spring catch (or catches) requiring no tools for operation. Opening the cover shall provide ready access to all interior components and to the enclosure mounting holes. Opening the cover shall not involve disturbance of incoming cables and terminal tubes. Component mounting fasteners shall be secured so as to not require demounting of the enclosure for component replacement. Components shall be mounted so that their terminal markings are easily visible with the enclosure cover open. Damping material, if used, shall be fastened positively.

3.4.4 Cable entrance.-Facilities shall be provided to admit cable through the bottom of the enclosure utilizing stuffing tubes as specified in MIL-I-983.

3.4.5 Finish.-Metal surfaces shall be finished in accordance with MIL-I-983. Plastic shall be within the color limits allowed for paint in MIL-I-983.

3.5 Transformers. - Transformers shall be grade 4 or grade 5, class S, life expectancy X of MIL-T-27.

3.5.1 Transformer windings.-The transformers shall have taps on the primary winding which will, with an 8-ohm resistive load connected across the secondary, draw from a 70.7-volt line the following amounts of power; 5-volt ampere (VA), 2.5 VA, 1.25 VA, 0.63 VA, 0.31 VA, 0.15 VA (all values shall be plus 0 or minus 20 percent). The transformer shall have taps on the secondary which will, with the 70.7-volt line on the 5 VA primary tap, draw through and 8-ohm resistive load 5 VA, 1.25 VA and 0.31 VA (all values to be plus or minus, 20 percent).

3.5.2 Transformer terminal strip.- A positively secured screw type, terminal strip shall be provided within the speaker enclosure to which all transformer connections and speaker voice coil connection shall be brought. The winding impedances and power ratings for a 70.7-volt line shall be included on the strip as it applies.

3.6 Circuit label. - A printed schematic interior wiring diagram of the loudspeaker shall be securely affixed inside the enclosure where it will be easily readable with the cover open. It shall show wire color coding, terminal designations, and selector switch connections and functions.

3.7 Loudspeaker.

3.7.1 Power handling capacity.-The loudspeaker shall be capable of handling audio signals of 5 watts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

3.7.2 Voice coil impedance.–The voice coil impedance of the loudspeaker shall be 8 ± 1 ohm at a frequency of 400 cycles per second (cps).

3.7.3 Minimum output sound pressure.–The LS-443/WIH and LS-444/WIH loudspeaker units shall be capable of producing a minimum output sound pressure of 94 decibels (db) (ref. 0.0002 dynes/cm^2) when tested as specified in 4.5.2. The required minimum output sound pressure for the LS-543/SIC loudspeaker units shall be 91 db (ref. 0.0002 dynes /cm^2) when tested as specified in 4.5.2.

3.7.4 Frequency response characteristic.–The frequency response characteristic of the loudspeaker shall fall within the limits shown on figure 2 when measured as specified in 4.5.3.

3.7.5 Load characteristics.–The load characteristic (sound pressure output versus volt ampere input) of the loudspeaker shall be essentially linear when tested as specified in 4.5.4. The maximum deviation from linearity at the 70.7-volt input level to the transformer shall be 0.5 db.

3.7.6 Noises.–There shall be no indication of buzzes, scratches, or other spurious sounds which might result from a rubbing voice coil or other production fault when tested as specified in 4.5.5.

3.8 Audio controls. - Audio controls consisting of a switch type channel selector and a switch type volume control shall be provided. These controls shall be mounted at the bottom of the front panel or cover of the loudspeaker enclosure.

3.8.1 Switches.–The channel selector switch and the volume control shall be in accordance with MIL-S-3786.

3.8.2 Channel selector. - The channel selector shall be a 5-position switch. It shall be so connected that it will switch its two output leads to any one of 4 separate inputs. The unconnected switch position shall be at the counter clockwise (CCW) end of the rotation and shall be marked "OFF". The output of the channel selector shall be fed to the volume selector.

3.8.3 Volume selector.–The volume selector switch shall be a 6-position switch. It shall connect one lead from the channel selector to the various taps of the line-to-voice coil transformer, with volume increasing for clockwise (CW) rotation. The other lead from the channel selector shall be permanently connected to the other side of the transformer.

3.9 Multiple speaker operation.–To provide for multiple speaker operation, the two input leads to the volume selector switch shall be made available on the terminal strip.

3.10 Shock.–The equipment shall withstand the shock test of MIL-S-901 for grade B, hull mounted items without the enclosure opening or tearing loose from the mounting.

3.11 Stray magnetic field test.–The maximum value of stray magnetic field measured on a horizontal plane 2.5 feet below the axis of the loudspeaker magnet shall not exceed 1.05 milligauss (105 gamma) for any of the test conditions specified in MIL-L-24223 for the stray magnetic field tests. Stray magnetic field shall be tested in accordance with 4.5.7. The stray magnetic field limit shall apply only to LS-543 ( )/SIC loudspeakers.

3.12 Instructions sheets.–One set of instruction sheets shall be furnished with each loudspeaker. This set of instructions shall include the following:

(a) Installation instructions for the loudspeaker including location of mounting holes and clearance required for opening the enclosure.
(b) Wiring diagram showing internal wiring.
(c) Winding and impedance data for the transformer.
(d) Assembly drawing showing major component parts and including a list of material and the weight of the loudspeaker.
(e) Repair parts list including detailed description and Federal stock number for the loudspeaker unit, transformer, and switches.
(f) Step-by-step troubleshooting procedure for locating defective component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

3.13 Drawings.–Drawings shall be in accordance with MIL-D-1000 as specified in the contract or order.

3.14 Repair parts (electronic).-Onboard and stock repair parts for loudspeakers covered by this specification shall be determined, identified and procured in accordance with MIL-E-17362.

4. QUALITY ASSURANCE PROVISIONS

4. 1 Responsibility for inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Qualification tests. 1/ Qualification tests shall be conducted at a laboratory satisfactory to the Naval Ship Engineering Center. One loudspeaker of each type shall be subjected to the qualification tests specified in table I.

Table I - Qualification tests.

Tests	Requirement paragraph	Test paragraph
General examination	3.3	4.5.1
Temperature	3.3	MIL-I-983
Accelerated life test	3.3	4.5.6
Dielectric strength	3.3	MIL-I-983
Insulation resistance	3.3	MIL-I-983
Vibration	3.3	MIL-I-983
Output sound pressure	3.7.3	4.5.2
Frequency response	3.7.4	4.5.3
Load characteristic	3.7.5	4.5.4
Noises	3.7.6	4.5.5
Shock	3.3 and 3.10	MIL-S-901
Stray magnetic field	3.11	4.5.7

4.3 Sampling for quality conformance inspection.

4.3.1 Inspection lot.-All equipment of the same type presented for delivery at one time shall be considered a lot. The lot may include the entire contract quantity or it may be the production of any convenient time period.

4.3.2 Sampling for group A examination and tests.-A sample of equipments shall be selected from each inspection lot in accordance with table II and subjected to the group A examination and tests listed in table IV. The results of each test shall be compared with specification requirements. Failure to conform to this specification for any group A test shall be counted as a defect, and the equipment shall not be offered for delivery. If the number of such nonconforming equipments in any sample exceeds the acceptance number for that sample, this shall be cause for rejection of the lot represented by that sample.

1/ Application for Qualification tests shall be made in accordance with "Provisions Governing Qualification SD-6" (see 6.2 and 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

Table II - Sampling for group A examination and tests
(AQL (approx.) 1.5 percent defective.)

Number of equipments in inspection lot	Number of equipments in sample	Number of equipments nonconforming on group A	
		Acceptance number	Rejection number
7 and under	All	-	-
8 to 15	7	0	1
16 to 40	10	0	1
41 to 110	15	0	1
111 to 300	25	1	2
301 to 500	35	1	2
501 and over	50	2	3

4.3.3 Sampling for group B tests.-A sample of equipments shall be selected from each inspection lot in accordance with table III and subjected to the group B tests listed in table IV with lot acceptance based on the sampling requirements of MIL-STD-105. The results of each test shall be compared with specification requirements. Failure to conform to the specification requirements for any group B test shall be counted as a defect, and the equipment shall not be offered for delivery. If the number of such nonconforming equipments in any sample exceeds the acceptance number for that sample, this shall be cause for rejection of the lot represented by that sample.

Table III - Sampling for group B test.

Number of equipments in inspection lot	Number of equipments in sample	Number of equipments nonconforming on group B tests	
		Acceptance number	Rejection number
3 and under	All	-	-
4 to 15	3	0	1
16 to 40	5	0	1
41 to 110	7	0	1
111 to 300	10	0	1
301 to 500	15	1	2
501 and over	25	2	3

4.3.4 Sampling for group C tests.-Group C tests will be required by the procuring activity concerned when the basic design of the equipment or the material of a vital part has been changed. One complete equipment shall be selected and subjected to the group C tests listed in table IV. The results of each test shall be compared with specification requirements. In the event of failure to conform to this specification for any group C test, the contractor shall correct the cause of failure on future production units and repair the deficiency in all equipments produced on the contract or order.

4.4 Quality conformance inspection.- The sample equipments selected in accordance with 4.3 shall be subjected to the tests listed in table IV. Tests shall be performed in the order listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

Table IV - Quality conformance inspection.

Test	Requirement paragraph	Test paragraph
Group A examination and tests		
General examination	3.3	4.5.1
Output sound pressure	3.7.3	4.5.2
Noises	3.7.6	4.5.5
Group B tests		
Load characteristic	3.7.5	4.5.4
Frequency response	3.7.4	4.5.3
Stray magnetic field	3.11	4.5.7
Group C tests		
Dielectric strength	3.3	MIL-I-983
Insulation resistance	3.3	MIL-I-983
Temperature and humidity	3.3	MIL-I-983
Accelerated life test	3.3	4.5.6
Vibration	3.3	MIL-I-983
Shock	3.3 and 3.10	MIL-S-901

4.5 Test procedures.-

4.5.1 General examination.-The general examination shall be conducted in accordance with MIL-I-983. No operating test is required.

4.5.2 Output sound pressure.-The loudspeaker shall be set up under free field conditions and a signal of 70.7 volts amplitude which is warbled (with a linear change of frequency on a logarithmic scale with respect to time) over a frequency range of 800 to 1250 cps applied to the 5-watt transformer input tap. The output sound pressure measured on the axis of the loudspeaker cone shall be measured at 10 feet and shall conform to the requirements of 3.7.3.

4.5.3 Frequency response characteristic.-The loudspeaker shall be set up under free field conditions and a signal of 70.7 volts amplitude applied to the 5-watt transformer input tap and varied over a frequency range of 120 to 7000 cps. The output sound pressure of the loudspeaker shall be measured at a distance of 10 feet on the axis of the loudspeaker cone and the response characteristic shall be as specified in 3.7.4.

4.5.4 Load characteristic.-The loudspeaker shall be set up under free field conditions and a signal which is warbled over an 800 to 1250 cycle band shall be applied to the 5-watt transformer input terminals and varied in amplitude from 0 to 70.7 volts. The output sound pressure shall be measured on the axis of the loudspeaker cone at a distance of 10 feet. The current drawn at each value of test voltage shall be measured to determine the volt-ampere electrical input. The load characteristic shall conform to 3.7.5.

4.5.5 Noises.-A program of music with electrical peaks of 70.7 volts as measured on an oscilloscope shall be applied to the 5-watt transformer input tap and the loudspeaker output monitored to determine conformance with 3.7.6.

4.5.6 Accelerated life test.-The accelerated life test shall be conducted as specified in MIL-I-983, except that only first 350 hour portion shall be applicable and the periods shall be only one-third of those specified. During this test a 70.7 volt signal warbled over an 850 to 1200 cps range shall be applied to the 2.5-watt transformer tap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

4.5.7 Stray magnetic field test.- Stray magnetic field produced by the loudspeaker shall be measured in accordance with the stray magnetic field test specified in MIL-L-24223 to determine conformance with 3.11. The stray magnetic field test is required for type LS-543 ( )/SIC loudspeakers only.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements.)

5.1 Sub-contracted material and parts.–The preparation for delivery requirements of referenced documents listed in Section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

5.2 Domestic shipment and early equipment installation and for storage of onboard repair parts 5.4).

5.2.1 Loudspeakers.

5.2.1.1 Preservation and packaging.- Preservation and packaging which may be the supplier's commercial practice, shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation.

5.2.1.2 Packing.- Packing shall be accomplished in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules or other carrier regulations as applicable to the mode of transportation and may conform to the suppliers commercial practice.

5.2.1.3 Marking.–Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, Federal stock number or manufacturer's part number, contract or order number, contractor's name and destination.

5.2.2 Onboard repair parts.– Onboard repair parts shall be preserved, packaged, packed and marked in accordance with MIL-E-17555.

5.3 Domestic shipment and storage or overseas shipment.–The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 5.4 and 6.1).

5.3.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made.

5.3.1.1 Preservation, packaging, packing and marking.–The equipment shall be preserved, packaged, packed and marked for the levels of shipment as specified (see 6.1) in accordance with MIL-E-17555.)

5.4 Use of polystyrene (loose-fill) material.-

5.4.1 For domestic shipment and early equipment installation and level C packaging and packing.–Unless otherwise approved by the procuring activity (see 6.2), use of polystyrene (loose-fill) material for domestic shipment and early equipment installation and level C packaging and packing applications such as cushioning, filler and dunnage is prohibited. When approved, unit packages and containers (interior and exterior) shall be marked and labelled as follows:

"CAUTION

Contents cushioned etc. with polystyrene (loose-fill) material.
Not to be taken aboard ship."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

Remove and discard loose-fill material before shipboard storage. If required, recushion with cellulosic material bound fiber, fiberboard or transparent flexible cellular material."

5.4.2 For level A packaging and level A and B packing.- Use of polystyrene (loose-fill) material is prohibited for level A packaging and level A and B packing applications such as cushioning, filler and dunnage.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) Level of preservation, packaging, packing and marking required if other than 5.2 (see 5.3).
(d) When polystyrene "loose-fill" is approved (see 5.4).

6.2 With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in applicable Qualified Products List QPL 17080 whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Naval Ship Engineering Center, Department of the Navy, Washington, D.C. 20360, and information pertaining to qualification of products may be obtained from that activity. Application for Qualification tests shall be made in accordance with "Provisions Governing Wualification SD-6" (see 6.2.1).

6.2.1 Copies of "Provisions Governing Qualification SD-6" may be obtained upon application to Commanding Officer, Naval Supply Depot, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.

6.3 CHANGES FROM PREVIOUS ISSUE. THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Preparing activity:
Navy-SH
(Project 5965-N073)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

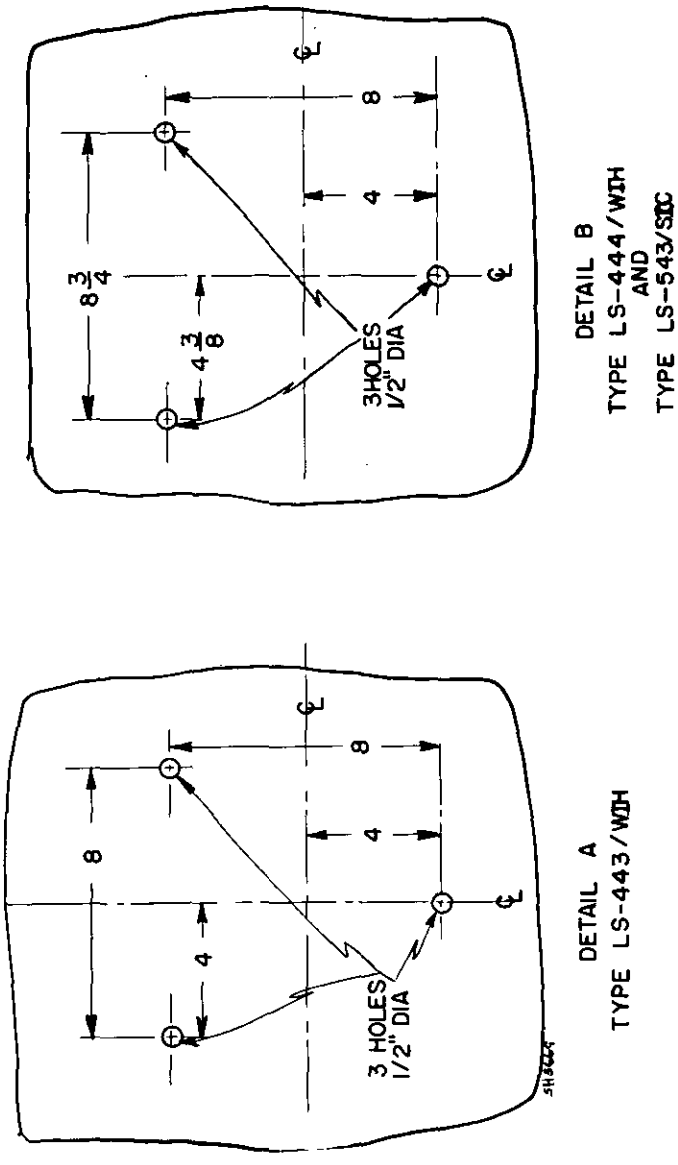


Figure 1 - Mounting details

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

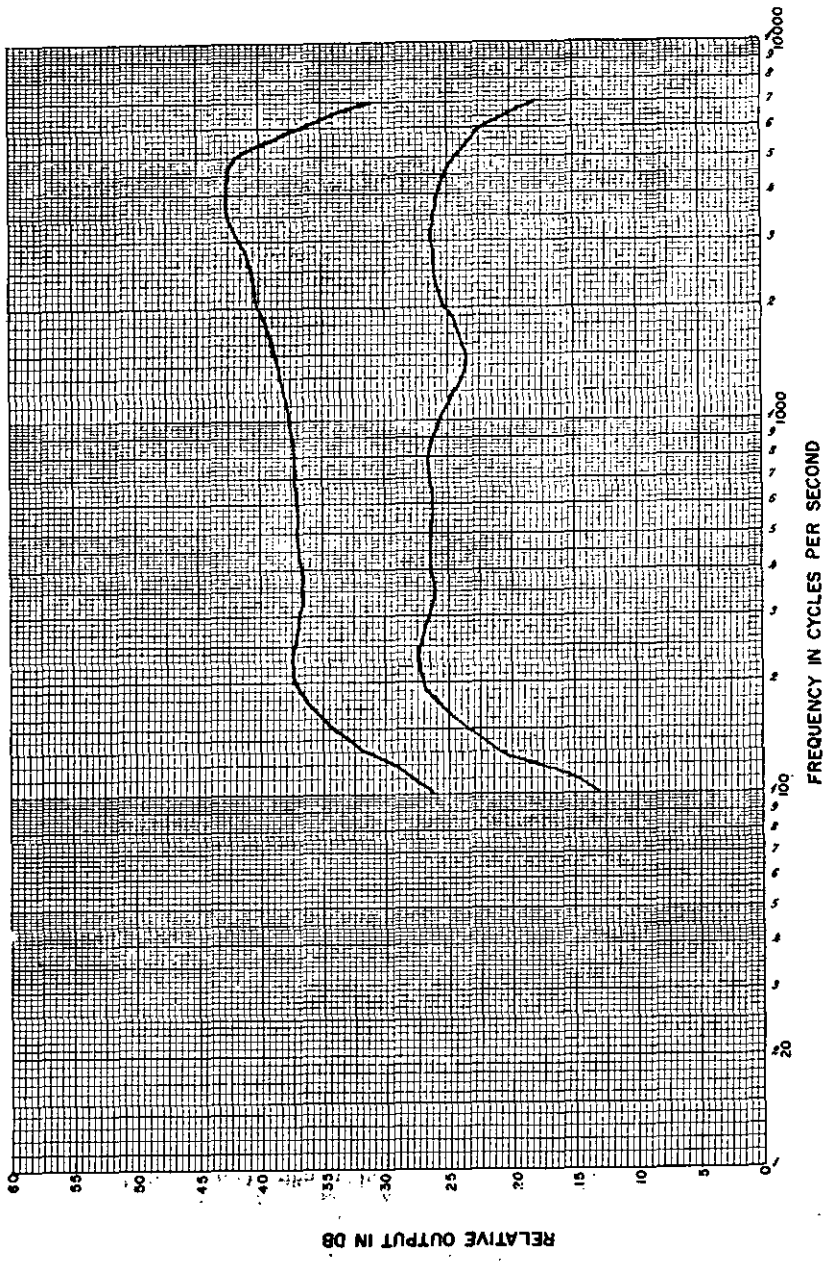


Figure 2 - Frequency response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL SHIP ENGINEERING CENTER
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER, NAVAL SHIP ENGINEERING CENTER
FEDERAL & MILITARY DOCUMENTS & DOD STANDARDIZATION BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE
(NAVSHIPS OVPRT 12-66)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:44Z
Check the source to verify that this is the current version before use.