MIL-C-48098B (AR)
30 July 1982
SUPERSEDING
MIL-C-48098A (PA)
7 July 1975

MILITARY SPECIFICATION

CHARGE, SPOTTING, PROJECTILE LOADING, ASSEMBLING AND PACKING

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements and provides quality assurance provisions for loading, assembling, and packaging for one type of charge, spotting, projectile.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards - Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 -	Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105 -	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-453 -	Inspection, Radiographic

FSC 1320

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

Government or contractor involved in the use of the spec... This sheet is to be filled out by personnel either

2.1.2 Other Government documents, drawings, and publications - The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (see 6.6)

U.S. Army Armament Research and Development Command (ARRADCOM)

9272016 -	Charge, Spotting, Projectile
9236500 -	Fuze, Mechanical Time and Superquick M577
9236502 -	Plug Assembly
9236504 -	Lead, Multi Purpose
9278853 -	Shipping and Storage Container, Fuze-PA19 Assembly, for Charge, Spotting, Projectile
9278403 -	Box, Wirebound, Packing Ammunition for Charge, Spotting, Projectile

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications - The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

CODE OF FEDERAL REGULATIONS

TITLE 49 - Transportation, Parts 100-199

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402. Orders should specify, "49 CFR 100-199 (latest revision)").

2.3 Order of precedence - In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Material - Materials shall be in accordance with the applicable drawings and specifications.

3.2 Parts - The parts shall comply with all requirements specified on Drawing (Dwg.) 9272016, all associated drawings, and with all requirements specified in applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

3.3 Radiographic examination of cup loading assembly - The cup loading assembly shall be radiographically examined for cracks, cavities, piping, or excessive cavitation in the explosive charge, and proper seating and alignment of copper cone in cup. No cracks or piping shall be permitted in any area. Cavitation and porosity, where present shall conform to the following criteria:

a. Cavitation is not permitted on the base of the pellet cavity. Porosity within the area bounded by the base of the pellet cavity, the apex of the cone and the cup wall shall not exceed 15% maximum.

b. Cavitation or porosity is not permitted at the interface of the charge and the surface of the cone, except as permitted in c. below.

c. Cavitation is permitted from the junction of the cone with the cup wall to and including the area within 5/16" above this junction provided that cavitation does not exceed a total of 1/32 of a square inch for both sides.

d. Cavitation is permitted on the sides of the pellet cavity and on the top, faced-off surface of the charge from the pellet cavity outward to the intersection with the cup wall provided that cavitation does not exceed a total of 1/32 of a square inch.

e. Cavitation is permitted in any other area not covered in a. through d. above provided that the amount does not exceed a total of 1/64 of a square inch.

f. Porosity in the area bounded by the apex of the cone, the wall of the cone, and the cup wall shall not exceed a maximum of 10% at this area. (Each side to be considered independent of the other).

3.4 Static functioning test of spotting charge assembly - The spotting charge assembly shall function satisfactorily as evidenced by complete penetration of all plates with the hole in the last plate no less than 0.125 (1/8) inch in diameter.

3.5 Ballistic functioning test - The projectile spotting charge shall be assembled to a projectile with a time fuze for which it is standard. The spotting charge assembly shall function satisfactorily as evidenced by complete break-up of the projectile observed from the ground.

3.6 First article inspection - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

3.7 Workmanship - All parts and assemblies shall be fabricated, loaded and assembled in a thorough, workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, grease, rust, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agents. Exterior surface coatings shall be continuous; however, a few light scratches not exposing base material may be permitted. All required marking and stamping shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections - The following types of inspection shall be conducted on this item:

a. First article inspection
b. Quality conformance inspection

4.3 First article inspection

4.3.1 Submission - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Part description	Drawings	Quantity
Spotting charge assemblies	9272016	72

4.3.2 Inspections to be performed - See MIL-A-48078 and Table 1 herein.

4.3.3 Rejection - See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE 1 - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Charge, Spotting, Projectile				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Charge, Spotting, Projectile (Dwg. 9272016)				
	Examination for defects	72	—	3.2	4.4.2.4
	Radiograph examination	72	—	3.3	4.5.3
	Static functioning test	50	—	3.4	4.5.4
	Ballistic functioning test	22*	—	3.5	4.5.5

NOTES:

*Includes 2 replacement assemblies.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation - Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, each inspection lot shall contain the following:

a. Cones of one interfix lot number from one manufacturer.
b. Cups of one interfix lot number from one manufacturer.
c. Covers of one interfix lot number from one manufacturer.
d. Pellets from one lot.
e. Explosive charge material (exclusive of pellets) from one lot.

4.4.2 Examination - See MIL-A-48078.

a. Sampling plans - Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, inspection level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.1	Cover		9272026
			NEXT HIGHER ASSEMBLY 9272016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	See 4.5.1			
Major					
101	Diameter		0.40%	3.2	Gage
102	Thickness		0.40%	3.2	Gage
103	Diameter of hole		0.40%	3.2	Gage
104	True position of hole		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Pellet, prior to assembly to cup loading assembly				9272017
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Weight, min.		0.40%	3.2	Balance
102	Diameter		0.40%	3.2	Gage
103	Height		0.40%	3.2	Gage
Minor					
201	Corner break excessive		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Cup loading assembly		9272015
			NEXT HIGHER ASSEMBLY 9272016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Radiographic examination for cavitation		100%	3.3	4.5.3
102	Diameter of pellet cavity		0.40%	3.2	Gage
103	Depth of pellet cavity		0.40%	3.2	Gage
104	Charge above or excessively below flush		0.40%	3.2	Gage
105	Cavities in base of pellet cavity		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9272016
4.4.2.4	Projectile Spotting Charge				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Explosive material or foreign matter on threads		100%	3.2	Visual
102	Threads damaged		100%	3.2	Visual
103	Static functioning test	50	100%	3.4	4.5.4
104	Ballistic functioning test	22	Note a	3.2	4.5.5
105	Runout of cone with thread and surface B		0.40%	3.2	Gage
106	Pellet missing or loose (sealer missing)		0.40%	3.2	Visual
107	Any part missing or improperly assemblied		0.40%	3.2	Visual
108	Cover not seated		0.40%	3.2	Visual
Minor					
201	Marking missing, incorrect or unidentifiable		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.7	Visual

NOTES:

a. Sample size 20 accept on 0 reject on 1 defective, two additional units are provided for use as replacements.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Box, Metal, prior to sealing				9278853
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Desiccant bag missing		0.40%	3.2	Visual
102	Evidence of moisture in box or on assemblies		0.40%	3.2	Visual/Manual
103	Packing materials not dry		0.40%	3.2	Visual/Manual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Box, Metal Sealed		9278853
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Air pressure test	(a)	0.65%	3.2	4.5.6
102	Incorrect container according to size and weight		0.40%	3.2	Visual/Manual
103	Contents of container loose		0.40%	3.2	Visual/Manual
104	Container damaged		0.40%	3.2	Visual
105	Closing of container incorrect or incomplete		0.40%	3.2	Visual
106	Base metal exposed excluding light scratches		0.40%	3.2	Visual
107	Marking data incomplete, incorrect or unidentifiable		0.40%	3.2	Visual
Minor	None defined				

NOTES:

(a) Sampling shall be in accordance with MIL-STD-105, Inspection Level III.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48098B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9278403
4.4.2.7	Box, Packing, prior to sealing				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Separator missing		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9278403
4.4.2.8	Box, Packing, Sealed				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Contents exposed		0.40%	3.2	Visual
102	Board broken or split		0.40%	3.2	Visual
103	Protruding nail		0.40%	3.2	Visual
Minor					
201	Wire improperly engaged		0.65%	3.2	Visual/Manual
202	Contents of box loose		0.65%	3.2	Manual
203	Marking incomplete, incorrect or unidentifiable		0.65%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Density of explosive charge material of cup loading assembly (Dwg. 9272015), major defect - The density of the explosive charge material shall be determined at the start of production each day, at the end of each shift and at the start of production of each new spotting charge assembly lot. If the density of any cup loading assembly fails to comply with the requirement specified on the drawing, no further production shall take place until the necessary process adjustments have been made and two (2) consecutively produced cup loading assemblies are subjected to and successfully pass this test. In addition, all cup loading assemblies produced since the last density check shall be rejected until additional tests have been completed to determine if these items comply with the density requirement. Testing shall be in accordance with paragraph 4.5.2.

4.4.4 Inspection equipment - The inspection equipment required to perform the examinations and tests prescribed herein is described in the paragraph reference/inspection method column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Test methods and procedures - (See 6.5).

4.5.1 Dimensional control of stamped parts - In place of the normal sampling associated with the classification of defects, and with the approval of the contracting officer, a sample of at least ten (10) parts shall be dimensionally inspected to qualify the tool used in the stamping process for use in production. In addition, a random sample of five (5) parts shall be selected from the last portion of each hour's production for dimensional inspection as a control of the tool during production.

If any defective parts are found during qualification of the tool, the tool producing the defective part shall not be used in production.

If any defective parts are found when inspection is performed for control of the tool, the tool producing the defective part shall be removed from production. Further , that portion of production since the last tool control check shall be returned to the contractor for corrective action.

All tools removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.5.2 Density of explosive charge material of cup loading assembly - The following procedure shall be used to determine the density of the explosive charge material of the cup loading assembly, after facing off the riser break, and prior to drilling of the pellet cavity;

a. Weigh cup and cone in air (grams)
b. Weigh cup and cone in water (grams)
c. Load, allow charge to set and break off riser
d. Face off riser break but do not drill pellet hole
e. Weigh assembly in air (grams)
f. Weigh assembly in water (grams)
g. Calculate weight of explosive charge in air = e - a (grams)
h. Calculate weight of explosive charge in water = f - b (grams)
i. Calculate density = g ÷ (g-h) (grams per cm^3)
(destructive test)

(Note: The above is a recommended test procedure. Requests for the use of alternate procedures shall be submitted to: Commander US Army ARRADCOM, ATTN: DRDAR-QAR-Q, Dover, NJ 07801, for approval prior to use.)

4.5.3 Radiographic examination for cavitation of cup loading assembly - Each cup loading assembly shall be subjected to radiographic examination by taking a radiograph, perpendicular to its longitudinal axis, in each of two (2) positions ninety degrees (90°) apart. The radiograph showing the greatest amount of cavitation for each area defined (see 3.3) shall be used to determine conformance with the requirement. Equipment, operations and procedures shall be qualified in accordance with MIL-STD-453. (Non-destructive test).

4.5.4 Static functioning test of spotting charge assembly - This test shall be performed by mounting the projectile spotting charge as specified in Figure 1 so as to functioning and perforate three (3) 7075-T6 aluminum plates. (A cardboard or paper tube is suggested as a holder for the projectile spotting charge). Plate dimensions and spacing shall be as shown. The three (3) plates shall be held in a suitable fixture with the last (bottom) plate resting on an ammunition test plate two and one half (2 1/2) inches, min. thickness.

Projectile spotting charge assemblies shall be tested utilizing the M577 fuze output (Dwgs. 9236500, 9236502, and 9236504) and shall be initiated using hardware, methods and procedures to be specified by the engineering agency.

For each projectile spotting charge lot tested, the contractor shall furnish proof of meeting the requirements specified herein to the satisfaction of the Contracting Officer. Any definite evidence, satisfactory to the Contracting Officer, of equipment of device malfunction that causes a test failure, shall be just cause for replacement of that item in the sample.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

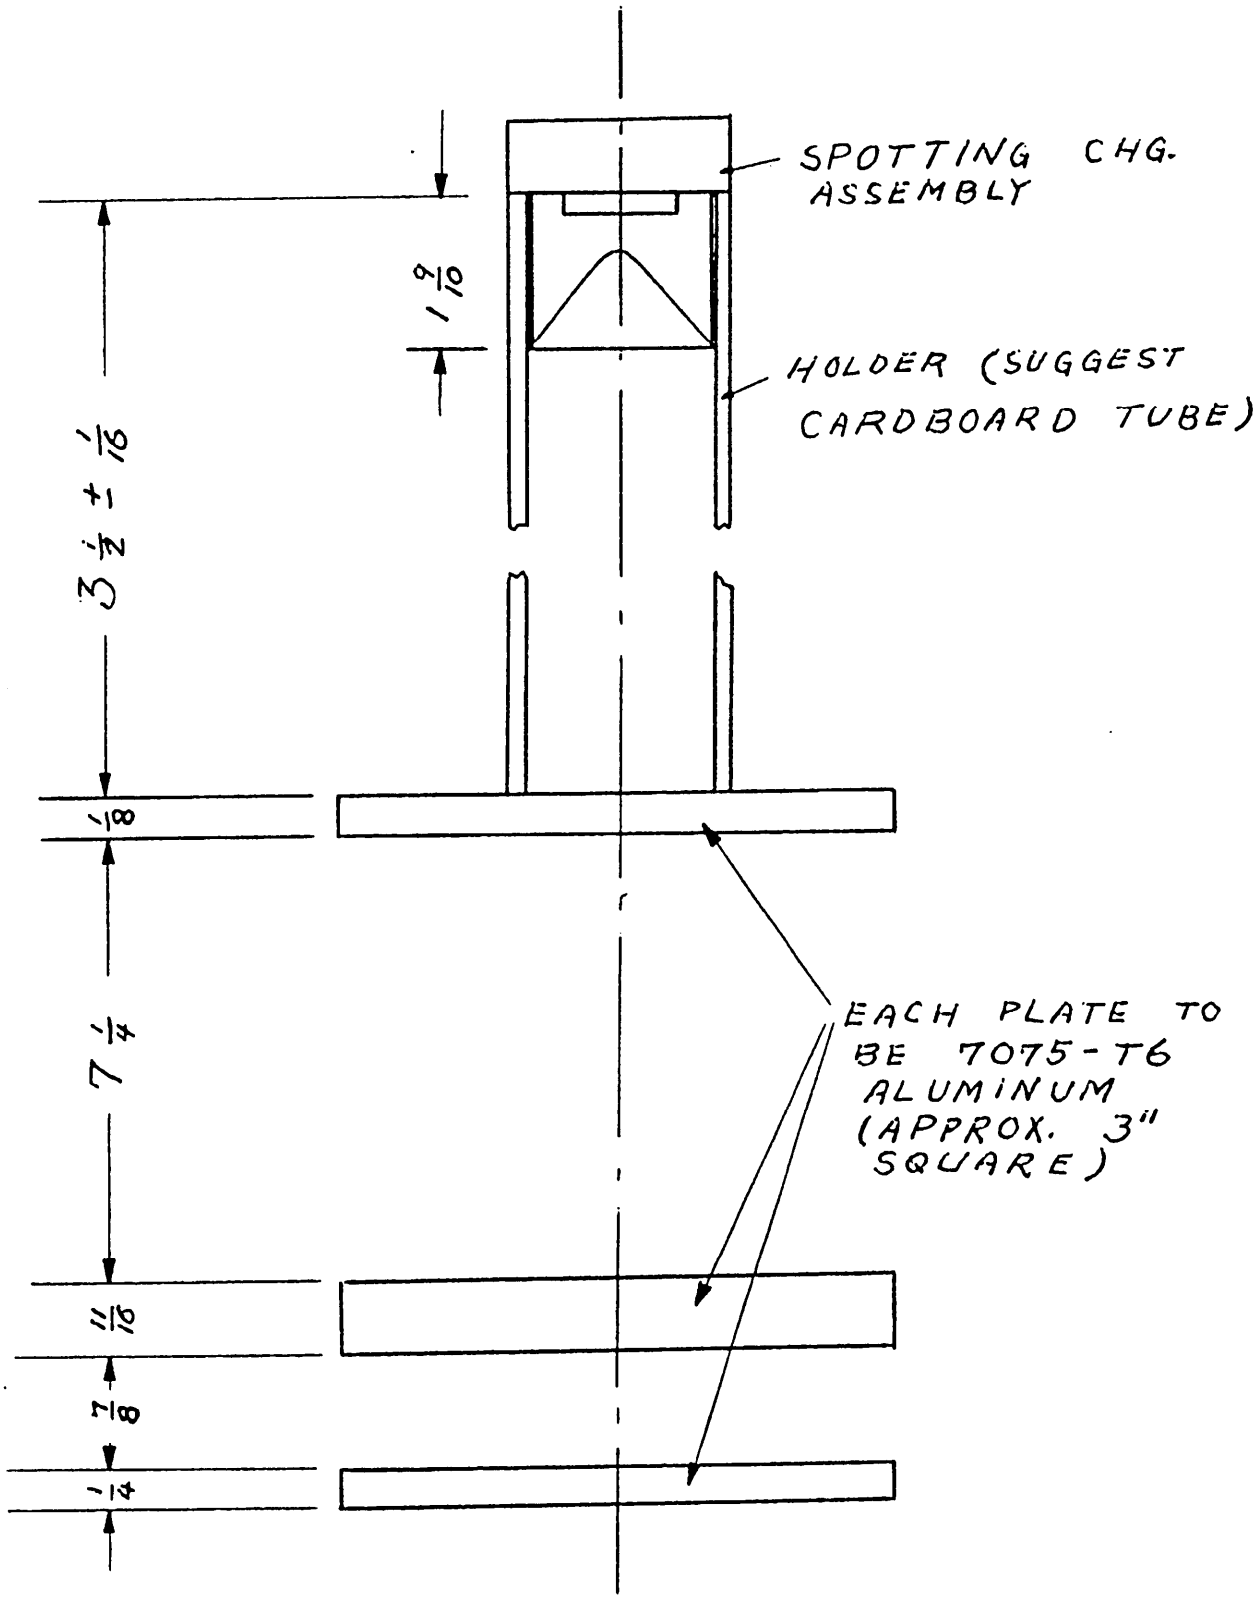


FIGURE 1. Static functioning test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

The test equipment for this test shall be drawn and approved in accordance with the provisons of 4.4.4. Observations shall be made after firing the projectile spotting charge to determine compliance with 3.4. (Destructive test).

4.5.5 Ballistic functioning test of projectile spotting charge - This test shall be performed at a Government-owned proving ground in accordnace with the applicable U.S. Army Test and Evaluation Command Material Test Procedures. Ten (10) spotting charge assemblies shall be assembled to M483A1 projectiles and ten (10) assemblies to M509 projectiles. All firings shall be from a weapon for which it is standard and at Zone 7 using the M577 Fuze. The fuzes and elevation shall be set to achieve a minimum height of functioning of one-thousand (1000) feet. Observation shall be made to determine compliance with 3.5.

If, for any reason, the proving ground considers that test conditions have adversely affected all or part of the test results, the results may be declared invalid and new tests performed on additional spotting charge assemblies, as required.

4.5.6 Air pressure test of metal packing box - The box shall be subjected to an air pressure test using as a minimum the pressure and time duration requirements specified on the applicable drawing. The box shall be placed in a chamber and a pre-determined volume of air shall be delivered to produce the specified pressure between the inside of the chamber and the outside of the box. The indicated pressure shall be maintained during the specified time interval for the box to satisfactorily pass this test. The test equipment shall be calibrated on an approved periodic basis to confirm accuracy of the equipment. All test and calibration equipment and instructions shall be approved in accordance with 4.4.4. (Non-destructive test).

5. PACKAGING

5.1 Preservation

5.1.1 Level A - The spotting charge assembly shall be preserved and packaged in accordance with Dwg. 9278853.

5.2 Packing

5.2.1 Level A - The spotting charge assemblies, preserved and packaged as specified in 5.1.1, shall be packed for shipment in accordnace with Dwg. 9278403.

5.3 Marking - Marking shall be in accordnace with Dwgs. 9278853, 9278403 and Code of Federal Regulations, Title 49, Parts 100-199.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

5.4 Shipping - When components from more than one lot are shipped as a carload, each lot shall be kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended use - The component covered by this specification is intended for use on the Projectile, 155MM, HE: M483A1 and Projectile, 8 Inch, HE; M509.

6.2 Ordering data - See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval - See MIL-A-48078. Submit equipment designs as required to Commander, US Army ARRADCOM, ATTN: DRDAR-QAR-I, Dover, NJ 07801.

6.4 Submission of test data - In addition to the normal distribution of records, when the spotting charge assembly is procured by the U.S. Army Armament Command, one (1) copy of all ballistic data and ammunition data cards shall be forwarded to: Commander, US Army ARRADCOM, ATTN: DRDAR-QAR-Q, Dover NJ 07801.

6.5 Barricades - The contractor shall employ proper barricades and safety procedures when examination or tests are conducted on assemblies containing an explosive.

6.6 Drawings - Drawings listed in Section 2 of this specification under the headings U.S. Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

6.7 Changes from previous issue - The margins of this specification are marked with vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army-AR

Preparing activity:
Army-AR

Project 1320-A649

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-48098B Charge Spotting, Projectile Loading, ASsembling and Packing

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armamemnt R&D Command
ATTN: DRDAR-QAR
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.