NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/449
11 September 2023

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, HEADQUARTER SPACE FORCE STAFF, CIVILIAN, U.S. SPACE FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

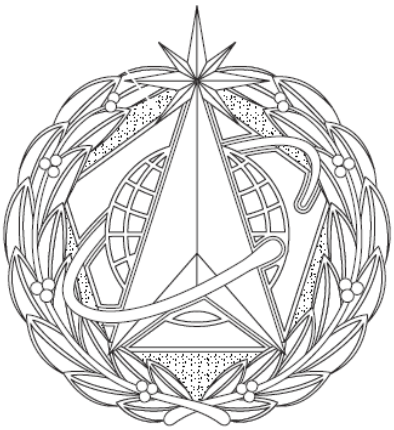

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSION:
HEIGHT (Overall): 13/16 inch (REF)
WIDTH (OVERALL): 3/4 Inch (REF)
THICKNESS (At thickest point): 0.085 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. The attaching shall be prong with pick and wing type clutch.

2. The prong shall be on the vertical center line 5/8 inch from the top of the lapel button on the reverse side and fused or soldered to the lapel button.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T02:31Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be stoned and applied to the Lapel Button and shall match TIOH Hard Enamel Color Chip Numbers listed below.

COLOR:	LOCATION:
Blue Epoxy #30	Hexagon
Black Epoxy #26	Globe

NOTE:
The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2023-203)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T02:31Z
Check the source to verify that this is the current version before use.