MILITARY SPECIFICATION

VALVE, SELECTOR, GENERAL SPECIFICATION FOR


This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification defines the requirements for a 3000 pound per square inch gage (psig) selector valve and accessories.

1.2 Classification.

1.2.1 Part number. The part number shall consist of the letter "M", the basic number of the specification, specification sheet number, and an assigned dash number when variations exist (see 3.1).

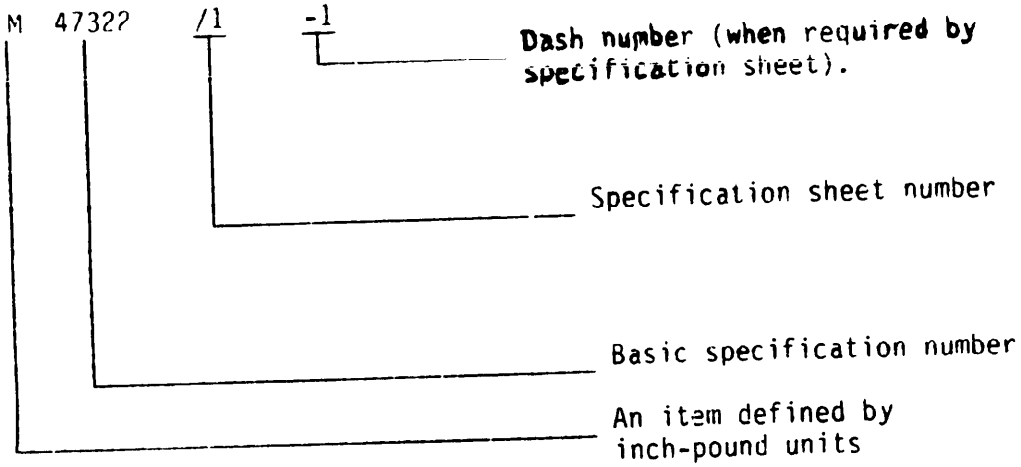

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL, 35898-5270 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) at the end of this document or by letter.

FSC 48GP
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

QQ-P-35	Passivation Treatment for Corrosion Resisting Steel
TT-P-1757	Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity

MILITARY

MIL-V-3	Valves, Fitting and Flanges (Except for Systems Indicated Herein) Packaging of
MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance
MIL-S-8660	Silicone Compound, NATO Code Number S-736
MIL-H-8775	Hydraulic System Components, Aircraft and Missiles, General Specification for
MIL-S-8802	Sealing Compound, Temperature-Resistant, Integral Fuel Tanks and Fuel Cell Cavities, High-Adhesion
MIL-F-13927	Fungus Resistant Test; Automotive Components
DOD-P-15328	Primer (Wash), Pretreatment (Formula No. 117 for Metals) (Metric)
MIL-P-23377	Primer Coatings: Epoxy-Polyamide, Chemical and Solvent Resistant

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

MIL-P-25732	Packing, Preformed, Petroleum Hydraulic Fluid Resistant, Limited Service at 275°F (135°C)
MIL-T-27730	Tape, Antiseize, Polytetrafluoroethylene, with Dispenser
MIL-C-46168	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-G-46898	Gasketing, RF and Pressure
MIL-E-52798	Enamel, Alkyd, Camouflage
MIL-C-83723	Connectors, Electrical, (Circular, Environment Resisting), Receptacles and Plugs, General Specification for

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1523	Age Controls of Age-Sensitive Elastomeric Materiel (for Aerospace Applications)
MS20913	Plug, Pipe
MS28775	Packing, Preformed, Hydraulic, +275°F, ("O" Ring)
MS33540	Safety Wiring and Cotter Pinning, General Practices for
MS33649	Bosses, Fluid Connection-Internal Straight Thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B46.1	Surface Texture, (Surface Roughness, Waviness and Lay)
ANSI Y14.5M	Dimensioning and Tolerancing

(Application for copies of ANSI publications should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A36	Standard Specification for Structural Steel
ASTM B61	Standard Specification for Steam or Valve Bronze Casting

(Application for copies of ASTM publications should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19103.)

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA (NAS)

NAS 1320	Bolt, Shear-Hexagon Head
NAS 1352	Screw, Cap, Socket Head-Undrilled and Drilled, Plain and Self-Locking, Alloy Steel and Corrosion Resisting Steel, UNRC-3A

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the currentversion before use.

(Application for copies of NAS publications should be addressed to the Aerospace Industries Association of America, Inc., 1725 DeSales Street, N.W., Washington, D.C. 20036.)

(Nongovernment standards and publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.2).

3.3 Materials. Materials used in the manufacture of the valve shall be in accordance with the applicable specification sheet.

3.3.1 Finish. Finishes used in the manufacture of the valve shall be in accordance with the applicable specification sheet.

3.3.1.1 Surface texture. Surface texture shall be in accordance with the applicable specification sheet.

3.3.2 Seals. Seals shall be in accordance with the applicable specification sheet.

3.3.2.1 Seats. Valve seats shall be in accordance with the applicable specification sheet.

3.4 Design and construction. Design and construction of the valve shall be in accordance with the applicable specification sheet (see 4.6.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the current version before use.

3.4.1 Valve ports. Valve ports shall be in accordance with the applicable specification sheet.

3.4.2 Weight. Valve weight shall be in accordance with the applicable specification sheet.

3.4.3 Fluid media. Operating media shall be hydraulic fluid in accordance with MIL-H-5606.

3.5 Operating requirements.

3.5.1 Operating pressure. The valve shall operate satisfactorily at a pressure of 3000 psig (see 4.6.2).

3.5.1.1 External leakage. The valve shall have no measurable amount of leakage at an operating pressure of 3000 psig (see 4.6.2.1).

3.5.1.2 Internal leakage. The internal leakage of the valve shall be in accordance with the applicable specification sheet (see 4.6.2.2).

3.5.1.3 Proof pressure. The valve shall withstand a proof pressure of 4500 psig without permanent deformation (see 4.6.2.3).

3.5.1.4 Flow and pressure drop. The flow and pressure drop shall be in accordance with the applicable specification sheet (see 4.6.2.4).

3.5.2 Operating torque. The operating torque shall be in accordance with the applicable specification sheet (see 4.6.3).

3.5.3 Actuation time. The actuation time shall be in accordance with the applicable specification sheet (see 4.6.4).

3.5.4 Service life. Service life shall be in accordance with the applicable specification sheet (see 4.6.5).

3.5.5 Burst pressure. The valve shall withstand 7500 psig without rupture or cracking (see 4.6.6).

3.6 Electrical requirements. The electrical characteristics shall be in accordance with the applicable specification sheet (see 4.6.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

3.7 Environmental requirements. The valve shall meet the requirements of this specification before, during and after the operating environmental conditions and after the nonoperating environmental conditions of this specification or any natural combination thereof (see 4.6.8).

3.7.1 Operating conditions.

3.7.1.1 Temperature. The valve shall be operational between the temperature limits of -54° Celsius (C), [-65° Fahrenheit (F)] and 71°C (160°F), (see 4.6.8.1.1).

3.7.1.2 Humidity. The valve shall be operational between the humidity limits of 100 percent at a temperature of 29°C (85°F) or below and dew point at 29°C (85°F) and 5 percent humidity at 49°C (120°F), (see 4.6.8.1.2).

3.7.1.3 Atmospheric pressure. The valve shall be operational between the atmospheric pressure limits of 15.4 to 10.1 pounds per square inch absolute (psia), (see 4.6.8.1.3).

3.7.1.4 Acoustic noise. The valve shall be operational while being subjected to acoustic noise at 178 decibles (db) mean level at 40 to 10,000 hertz (Hz) for 2 seconds (see 4.6.8.1.4).

3.7.1.5 Rainfall. The valve shall be operational while being subjected to rainfall of 0.45 inch for 1.0 minute, 1.0 inch for 5.0 minutes (to include one period of 1.0 minute conditions), 1.5 inches for 10.0 minutes (to include one period of 5.0 minute condition), 5.5 inches for 1.0 hour (to include one period of 5.0 minute condition and one period of 10.0 minute condition) and 9.5 inches for 12.0 hours (to include one period of 1.0 hour condition). During all rainfall periods the intermittent wind speed shall be to 35 knots (see 4.6.8.1.5).

3.7.1.6 Sand and dust. The valve shall be operational while being subjected to blowing sand of particle size 0.01 to 1.0 millimeter (mm) with wind speeds 15 knots or greater and blowing dust of particle size 0.0001 to 0.01 mm with wind speed 15 knots or greater (see 4.6.8.1.6).

3.7.1.7 Snow. The valve shall be operational while being subjected to falling snow crystal size range of 0.05 to 20.0 mm with a median of 2.0 to 5.0 mm and blowing or drifting of fallen snow particle size range of 0.02 to 0.9 mm with temperature above -10°C (14°F) and median size of 0.1 mm with temperatures below -10°C (14°F). Wind speeds shall be above 10 knots (see 4.6.8.1.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

3.7.1.8 Ice. The valve shall be operational while exposed to an accumulation of 2.0 inches of clear glaze with specific gravity of 0.85. Mechanical and electrical operating surfaces may be cleared for operation (see 4.6.8.1.8).

3.7.1.9 Salt spray. The valve shall be operational while exposed to a 5.0 percent salt spray solution (sodium chloride) as encountered in coastal regions (see 4.6.8.1.9).

3.7.1.10 Fungus. The valve shall be operational and withstand the growth of fungi specified in table I (see 4.6.8.1.10).

TABLE I. Fungi.

Group	Fungi	
I - - -	Chaetomium Globosum	6205 1/
	Myrothecnim Verruearia	9095
II - - -	Memnoniella Echinata	9597
	Aspergillus Niger	6275
III - - -	Aspergillus Flavus	10836
	Aspergillus Terreus	10690
IV - - -	Penicillium Citrinum	9849
	Penicillium Ochrochloron	9112

1/ Denotes American type culture collection numbers

3.7.2 Nonoperational conditions.

3.7.2.1 Temperature. The valve shall withstand storage at temperature between -54°C (-65°F) to 71°C (160°F), (see 4.8.6.2.1).

3.7.2.2 Temperature shock. The valve shall withstand a temperature shock of 75°C (167°F) in one minute between the limits of -54°C (-65°F) to 71°C (160°F), (see 4.6.8.2.2).

3.7.2.3 Humidity. The valve shall withstand in storage the same humidity conditions as specified in 3.7.1.2 and in addition, storage for up to 4.0 hours per day at an upper limit of 71°C (160°F). The absolute humidity will be 13 grains per cubic foot (grains/ft^3), (see 4.6.8.2.3).

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the currenversion before use.

3.7.2.4 Atmospheric pressure. The valve shall withstand during storage and ground transit atmospheric pressure of 15.4 to 10.1 psia and during air transit atmospheric pressure at 40,000 feet (ft) (2.47 psia) and a maximum decent rate of 3,000 ft per minute (see 4.6.8.2.4).

3.7.2.5 Vibration. The valve shall withstand during storage vibration levels of 2.0 gravity units (g) at 2.0 to 20.0 Hz and 2.5 g at 20.0 to 500.0 Hz along each of the three major axes (see 4.6.8.2.5).

3.7.2.6 Shock. The valve shall withstand during transit shock of 15.0 g for 50 milliseconds (ms) along the longitudinal axis and 30.0 g for 3.0 ms along the vertical and lateral axis (see 4.6.8.2.6).

3.7.2.7 Acoustic noise. The valve shall withstand during storage acoustic noise of 123 db mean level at 40 to 10,000 Hz for 4.0 hours (see 4.6.8.2.7).

3.7.2.8 Rainfall. The valve shall withstand during storage the rainfall conditions of 3.7.1.5 (see 4.6.8.2.8).

3.7.2.9 Sand and dust. The valve shall withstand during storage the blowing sand and dust conditions of 3.7.1.6 (see 4.6.8.2.9).

3.7.2.10 Snow. The valve shall withstand during storage the snow conditions of 3.7.1.7 and in addition a snow load of 20 pounds per square foot (lb/ft^2), (see 4.6.8.2.10).

3.7.2.11 Ice. The valve shall withstand during storage the ice conditions at 3.7.1.8 (see 4.6.8.2.11).

3.7.2.12 Salt spray. The valve shall withstand during storage the salt spray conditions of 3.7.1.9, (see 4.6.8.2.12).

3.7.2.13 Fungus. The valve shall withstand during storage the fungus conditions of 3.7.1.10 (see 4.6.8.2.13).

3.8 Marking. The valve shall be marked in accordance with MIL-STD-130 (see 4.6.1).

3.9 Workmanship. Valves shall be of a quality that is uniform, free of cracked or displaced parts, sharp edges, burrs, chips, corrosion, scale, dirt and other defects which will affect life, serviceability or appearance. Particular attention shall be given to neatness and thoroughness of machine screw assemblies (see 4.6.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Test equipment and inspection facilities. The manufacturer shall insure that test and inspection facilities of sufficient accuracy, quality and quantity are established and maintained to permit performance of required inspections.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. All inspections and tests shall be under station ambient conditions, except when the valve is subjected to other specified conditions for the purpose of the inspection or test.

4.4 First article inspection. First article inspection shall consist of the inspections and tests specified under 4.6 and shall be conducted in any sequence acceptable to the procuring activity. Quantity production shall be withheld until the first article sample has been pronounced satisfactory by the procuring activity (see 3.1 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the currentversion before use.

4.4.1 First article sample. The first article sample shall consist of three units manufactured using the same methods and processes and representative of the production product.

4.5 Quality conformance inspection. Quality conformance inspections shall consist of the inspections specified in table II and shall be performed in any sequence acceptable to the procuring activity.

4.5.1 Inspection lot. The quality conformance inspection shall consist of all valves which are manufactured in continuous production under uniform conditions and are offered for inspection at any one time.

4.5.2 Inspection sampling. Inspection shall be on a 100 percent basis or single sampling of a random sample in accordance with MIL-STD-105 to an acceptable quality level (AQL) of 1.0 (see 6.2).

TABLE II. Quality conformance inspection.

Inspection	Requirements paragraph	Test method paragraph
Examination of product - - -	3.4, 3.8 and 3.9	4.6.1
Operating pressure - - - - -	3.5.1	4.6.2
External leakage - - - - - -	3.5.1.1	4.6.2.1
Internal leakage - - - - - -	3.5.1.2	4.6.2.2
Proof pressure - - - - - - -	3.5.1.3	4.6.2.3
Flow and pressure drop - - -	3.5.1.4	4.6.2.4
Operating torque - - - - - -	3.5.2	4.6.3
Actuation time - - - - - - -	3.5.3	4.6.4
Electrical requirements - -	3.6	4.6.7

4.5.3 Noncompliance. Where 100 percent inspection is specified, all defectives shall be rejected. The requirements of MIL-STD-105 shall apply for acceptance and rejection of the random sample. When the defectives are greater than the allowable number, the manufacturer shall notify the procuring activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, an on all units of product which can be corrected and are subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action has been taken.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the currentversion before use.

4.5.4 Inspection of packaging. Preservation, packing and marking shall be inspected for conformance to section 5.

4.6 Methods of inspection.

4.6.1 Examination of product. The valve shall be visually and dimensionally inspected and weighed for conformance to this specification and the applicable specification sheet (see 3.4, 3.8 and 3.9).

4.6.2 Operating pressure. The valve shall be pressurized and inspected for conformance to 3.5.1.

4.6.2.1 External leakage. The valve shall be pressurized and inspected for conformance to 3.5.1.1.

4.6.2.2 Internal leakage. The valve shall be pressurized and inspected for conformance to 3.5.1.2.

4.6.2.3 Proof pressure. The valve shall be pressurized to proof pressure and inspected for conformance to 3.5.1.3.

4.6.2.4 Flow and pressure drop. The valve shall be pressurized and the flow and pressure drop measured for conformance to 3.5.1.4.

4.6.3 Operating torque. The valve shall be pressurized and the operating torque measured for conformance to 3.5.2.

4.6.4 Actuation time. The valve shall be pressurized and the actuation time measured for conformance to 3.5.3.

4.6.5 Service life. The valve shall be pressurized and life cycled in accordance with 3.5.4.

4.6.6 Burst pressure. The valve shall be pressurized to burst pressure and inspected for conformance to 3.5.5.

4.6.7 Electrical requirements. The electrical characteristics of the valve shall be measured for conformance to 3.6.

4.6.8 Environmental requirements. The valve shall be tested as follows for conformance to 3.7.

4.6.8.1 Operating conditions.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the current version before use.

4.6.8.1.1 Temperature. The valve shall be stabilized for 4.0 hours at each temperature and tested in accordance with MIL-STD-810, method 501 for conformance to 3.7.1.1.

4.6.8.1.2 Humidity. The valve shall be tested in accordance with MIL-STD-202, method 106 for conformance to 3.7.1.2.

4.6.8.1.3 Atmospheric pressure. The valve shall be tested in accordance with MIL-STD-202, method 105 for conformance to 3.7.1.3.

4.6.8.1.4 Acoustic noise. The valve shall be tested in accordance with MIL-STD-810, method 515 for conformance to 3.7.1.4.

4.6.8.1.5 Rainfall. The valve shall be tested in accordance with MIL-STD-810, method 506 for conformance to 3.7.1.5.

4.6.8.1.6 Sand and dust. The valve shall be tested in accordance with MIL-STD-202, method 110 for conformance to 3.7.1.6.

4.6.8.1.7 Snow. The valve shall be tested for conformance to 3.7.1.7.

4.6.8.1.8 Ice. The valve shall be tested in accordance with MIL-STD-810, method 521 for conformance to 3.7.1.8.

4.6.8.1.9 Salt spray. The valve shall be tested in accordance with MIL-STD-202, method 101 for conformance to 3.7.1.9.

4.6.8.1.10 Fungus. The valve shall be tested in accordance with MIL-F-13927, method A, class 3 for conformance to 3.7.1.10.

4.6.8.2 Nonoperational conditions.

4.6.8.2.1 Temperature. The valve shall be stored at each temperature for 24 hours and returned to room temperature and tested for conformance to 3.7.2.1.

4.6.8.2.2 Temperature shock. The valve shall be tested in accordance with MIL-STD-202, method 107, test condition A for conformance to 3.7.2.2.

4.6.8.2.3 Humidity. The valve shall be tested in accordance with MIL-STD-202, method 106 for conformance to 3.7.2.3.

4.6.8.2.4 Atmospheric pressure. The valve shall be tested in accordance with MIL-STD-202, method 105 for conformance to 3.7.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

4.6.8.2.5 Vibration. The valve shall be tested in accordance with MIL-STD-202, method 204 for conformance to 3.7.2.5.

4.6.8.2.6 Shock. The valve shall be tested in accordance with MIL-STD-202, method 205 for conformance to 3.7.2.6.

4.6.8.2.7 Acoustic noise. The valve shall be tested in accordance with MIL-STD-810, method 515 for conformance to 3.7.2.7.

4.6.8.2.8 Rainfall. The valve shall be tested in accordance with MIL-STD-810, method 506 for conformance to 3.7.2.8.

4.6.8.2.9 Sand and dust. The valve shall be tested in accordance with MIL-STD-202, method 110 for conformance to 3.7.2.9.

4.6.8.2.10 Snow. The valve shall be tested for conformance to 3.7.2.10.

4.6.8.2.11 Ice. The valve shall be tested in accordance with MIL-STD-810, method 521 for conformance to 3.7.2.11.

4.6.8.2.12 Salt spray. The valve shall be tested in accordance with MIL-STD-202, method 101, condition A for conformance to 3.7.2.12.

4.6.8.2.13 Fungus. The valve shall be tested in accordance with MIL-F-13927, method A, class 3 for conformance to 3.7.2.13.

5. PACKAGING

5.1 Preservation, packing and marking. Preservation, packing and marking shall be in accordance with MIL-V-3 (see 6.2).

6. NOTES

6.1 Intended use. The valve is intended for use in ground support equipment of a military system.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

c. Whether first article sample is required (see 3.1 and 4.4).

d. Level of inspection required (see 4.5.2).

e. Method of preservation, packing and marking required (see section 5).

6.3 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of three units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results and disposition of first article. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Metrication. Metric equivalents in accordance with FED-STD-376 are acceptable for use in this specification.

6.5 Subject term (keyword) listing.

Valve, manual
Valve, powered

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4820-A006)

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:54Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-RD-SE-TD-ST
Redstone Arsenal, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:54Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-V-47322(MI)	Valve, Selector, General Specification For

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:54Z
Check the source to verify that this is the current version before use.