
MIL-M-16034/3A
6 November 1964
SUPERSEDING
MIL-M-16034/3
2 January 1953

MILITARY SPECIFICATION SHEET

VOLTMETERS, A. C. SWITCHBOARD, 4-1/2 INCH,

250-DEGREE SCALE

This specification sheet forms a part of the latest issue of Military Specification MIL-M-16034.

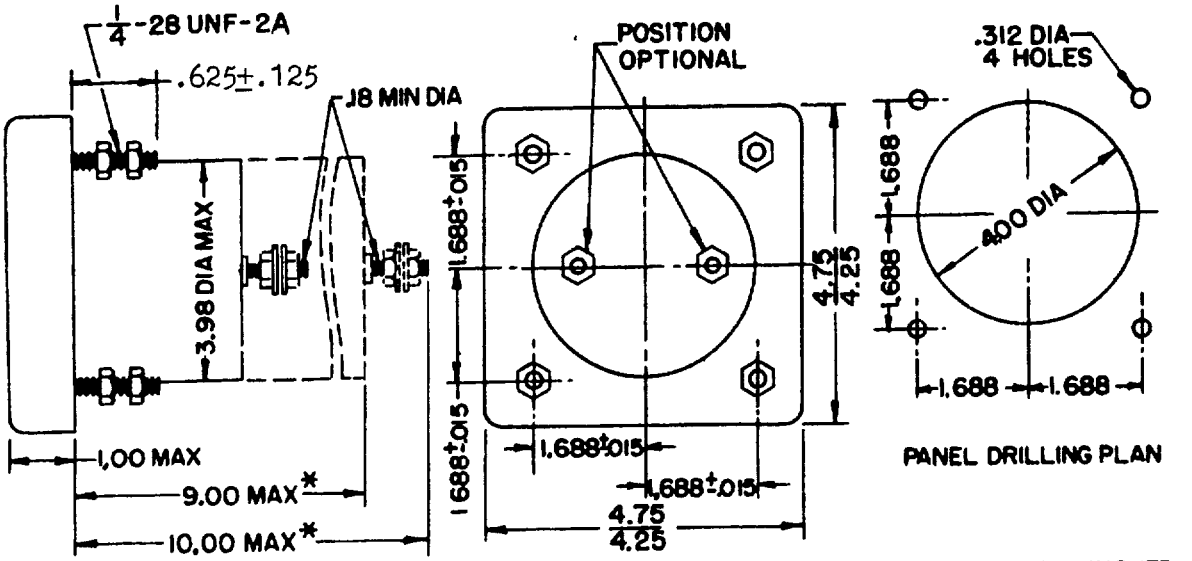

*THIS DIMENSION HAS BEEN CHOSEN TO ALLOW THE MOUNTING OF ACCESSORIES ON INSTRUMENT PROPER

REQUIREMENTS:

	VOLTS, A. C. (60, 400, 800 C. P. S.)
FULL-SCALE RANGES	150 300 600

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (cont'd)

ITEM	REQUIREMENT
Scale length	6.5 inches min.
Position influence (balance)	1 percent of scale length, max. change.
Initial accuracy	1 percent max. error. (1-1/2 percent max error for high-impact-shock-resistant meters.)
Damping factor	3 min.
Response time	2.5 seconds max.
Power consumption	10 va. max.
Frequency influence	.5 percent max. change for 60-cycle meters. 2 percent max. change for 400- and 800-cycle meters.
External-field influence	3 percent max. change in 5-oersted field.
Heat effect at 65° C.	3 percent max. change at 65° C. .5 percent max. permanent change.
Temperature influence	.75 percent max. change.
Low-temperature exposure	1.88 percent max. change at 0° C. .5 percent max. permanent change.
Sustained overload	1 percent of scale length, max. temporary zero shift. .5 percent of scale length, max. permanent zero shift. .33 percent max. permanent change in indication.
Vibration	1 percent max. change.
Friction effect	2 percent max. change.
Humidity resistance	2 percent max. change.
Shock (high-impact)	5 percent max. change.

NOTES:
1. Percentages are based on full-scale value unless otherwise indicated herein.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Reviewers:
Army - EL, MU
Navy - SH
Air Force - 11

Users:
Army - MO, GL
Navy - MC, WP
Air Force - 85

Preparing activity:
Navy - SH
(Project 6625-0264)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:12Z
Check the source to verify that this is the current version before use.