INCH-POUND

MIL-DTL-16034/4B
13 March 2008


SUPERSEDING
MIL-M-16034/4A
6 November 1964

DETAIL SPECIFICATION SHEET

AMMETERS, AC, SWITCHBOARD, 4.5-INCH, 250-DEGREE SCALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16034.

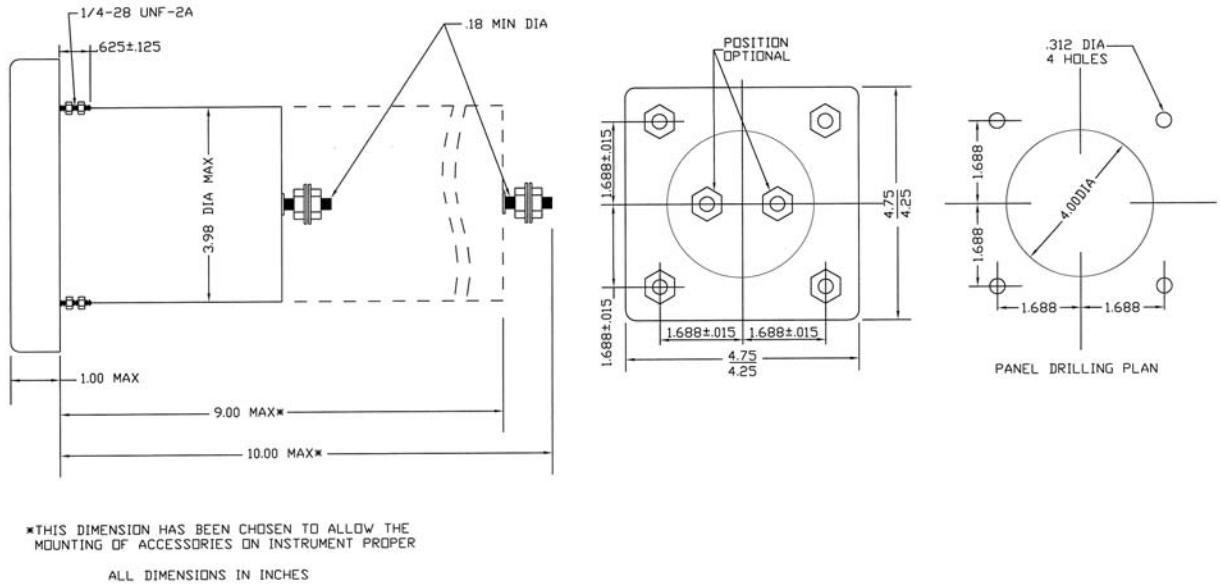

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

	MILLAMPERES, AC [1/]	AMPERES, AC [1/]					KILOAMPERES AC [1/]	
FULL-SCALE RANGES [2/]	100	5	30	80	200	500	1	2
	200	10	50	100	300	600	1.2	3
	500	20	75*	150	400	800	1.5	4
		*Not approved for 400-cycle meters.						

NOTES:

[1/] Alternating current (60, 400, or 800 cycles per second).

[2/] All kiloammeters, 400- and 800-cycle ammeters, and 60-cycle ammeters above 50 amperes are calibrated for use with external transformers. Current through meter at full-scale deflection is 5 amperes.

ITEM	REQUIREMENTS
Scale length	6.5 inches min
Position influence (balance)	1 percent of scale length, max change
Initial accuracy	1 percent max error (1.5 percent max error for high-impact-shock-resistant meters)
Damping factor	3 min
Response time	2.5 seconds max
Power consumption	5 VA max
Frequency influence	0.5 percent max change for 60-cycle meters 2 percent max change for 400- and 800-cycle meters
External-field influence	3 percent max change in 5-oersted field
Heat effect at 65 °C	2 percent max change at 65 °C 0.5 percent max permanent change
Temperature influence	0.5 percent max change
Low-temperature exposure	1.25 percent max change at 0 °C 0.5 percent max permanent change
Momentary overload	1 percent max change
Sustained overload	1 percent of scale length, max temporary zero shift 0.5 percent of scale length, max permanent zero shift 0.33 percent max permanent change in indication
Vibration	1 percent max change
Friction effect	2 percent max change
Humidity resistance	2 percent max change
Shock (high-impact)	5 percent max change

NOTE:

1. Percentages are based on full-scale value unless otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:12Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – SH
Air Force – 99

Preparing Activity:
Navy – SH
(Project 6625-N083)

Reviewing Activity:
Army – CR4
Navy – EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:12Z
Check the source to verify that this is the current version before use.