
NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

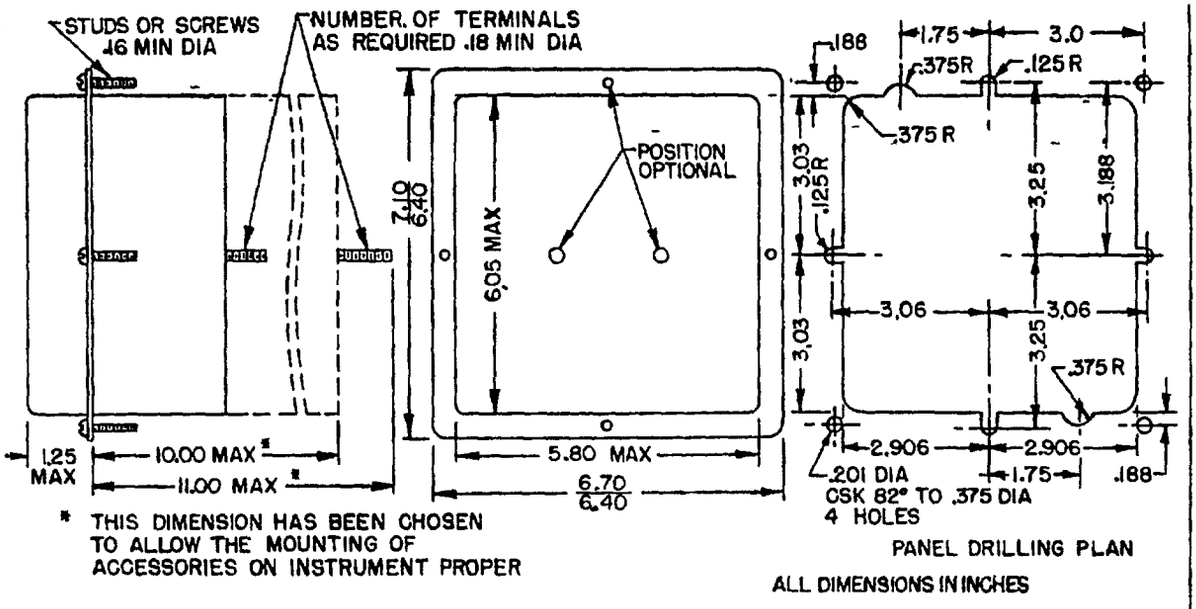

* THIS DIMENSION HAS BEEN CHOSEN TO ALLOW THE MOUNTING OF ACCESSORIES ON INSTRUMENT PROPER

PANEL DRILLING PLAN

ALL DIMENSIONS IN INCHES

	VOLTS, A.C. (60, 400, 800 C. P. S.)
FULL-SCALE RANGES	150
	300
	600

APPROVED 2 Jan 1953 REVISED

CUSTODIANS:
Army–Signal Corps
Navy–Bureau of Ships
Air Force

PROCUREMENT SPECIFICATION
MIL-M-16034

MS Form 233 1 Oct 52

SPECIFICATION SHEET

VOLTMETERS, A.C., SWITCHBOARD, 6-INCH, 90-DEGREE SCALE

MIL-M-16034/7

SHEET 1 OF 2

'Other interest Army - EOT, Navy - MCOrSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:13Z
Check the source to verify that this is the current version before use.

ITEM	REQUIRMENT
Scale length	5 inches min.
Position influence (balance)	1 percent of scale length, max. change.
Initial accuracy	1 percent max. error.
Damping factor	3 min.
Response time	2.5 seconds max.
Power consumption	10 va. max.
Frequency range	60-cycle meters: 25 to 125 cycles, 2 percent max. change.
Frequency influence	.5 percent max. change for 60-cycle meters. 2 percent max. change for 400- and 800-cycle meters.
External-field influence	3 percent max. change in 5-oersted field.
Heat effect at 65° C.	3 percent max. change at 65° C. .5 percent max. permanent change.
Temperature influence	.75 percent max. change.
Low-temperature exposure	1 88 percent max. change at 0° C. .5 percent max. permanent change.
Sustained overload	1 percent of scale length, max. temporary zero shift .5 percent of scale length, max. permanent zero shift. .33 percent max. permanent change in indication.
Vibration	1 percent max. change.
Friction effect	2 percent max change.
Humidity resistance	2 percent max change.

NOTES:

1. Percentages are based on full-scale value unless otherwise indicated herein.
2. Referenced specification shall be of the issue in effect on date of invitation for bids.

APPROVED 2 Jan 1953 REVISED

NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto

CUSTODIANS:
Army–Signal Corps
Navy–Bureau of Ships
Air Force

PROCUREMENT SPECIFICATION
MIL-M-16034

SPECIFICATION SHEET

VOLTMETERS, A. C., SWITCHBOARD, 6-INCH, 90-DEGREE SCALE

MIL-M-16034/7

SHEET 2 OF 2

MS Form 233 1 Oct 52

Other interest: Army - EOT, Navy - MCOrSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:13Z
Check the source to verify that this is the current version before use.