MIL-D-82490(OS)
26 July 1967
Superseding
NOTS XS 503 Rev. G
12 May 1967

MILITARY SPECIFICATION

# DRIVER, GAS OPERATED
# MARK 8 MOD 0

**This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy**

## 1. SCOPE

1.1 This specification establishes the requirements of one type of Driver, Gas Operated Mark 8 Mod 0. (See 6.1 for intended use and description.)

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the data of invitation for bids, form a part of this specification to the extent specified herein, except as noted.

SPECIFICATION

FEDERAL

| | |
|---|---|
| PPP-B-621 | Boxes, Wood, Nailed and Lock Corner |

MILITARY

| | |
|---|---|
| MIL-P-116 | Preservation, Methods of |
| MIL-L-10547 | Liners, Case and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-102 | Preservation, Packaging and Packing Levels |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

MILITARY

| | |
|---|---|
| MIL-STD-105D | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-167 | Mechanical Vibration of Shipboard Equipment |

DRAWINGS

BUREAU OF NAVAL WEAPONS

| | |
|---|---|
| LD 497877 | Driver, Gas Operated, Mark 8 Mod 0 and all documents listed thereon |

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.

Interstate Commerce Commission

| | |
|---|---|
| 49 CFR Part 71 to 78 | Interstate Commerce Commission Rules and Regulations for the Transportation of Explosives and other Dangerous Articles |

(The Interstate Commerce Commission regulations are now a part of the Code of Federal Regulations and are available from the Superintendent of Documents, Government Printing Office, Washington D.C. 20402. Orders for the above publication should cite "the latest issue and supplements thereto".)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the driver shall be in accordance with the requirements specified herein and with the applicable documents listed in BuWeps LD 497877.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the driver shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

3.3 Safety. The supplier or manufacturer, as applicable, shall provide adequate safety precautions for protection of personnel during handling of the driver. (See 6.5.)

3.4 Performance and product characteristics. The driver shall meet the following performance and product characteristics.

3.4.1 Circuit requirements, before functioning.

3.4.1.1 Electric initiation circuit insulation resistance. The driver electric initiation circuit shall have an insulation resistance of not less than 50 megohms between the shorted circuit leads and the case. The applied potential shall be 500 plus or minus 50 volts DC.

3.4.1.2 Electric initiation circuit resistance. The initiation circuit shall have a resistance of 4.50 plus or minus 0.50 ohms while at a temperature of 70 degrees Fahrenheit (F).

3.4.1.3 Electric initiation circuit sensitivity. The initiation circuit of the driver shall be capable of conducting a direct current of 50 milliamperes without functioning.

3.4.2 Function. The driver shall function while stabilized at temperatures ranging from plus 35 to 120 degrees F.

3.4.2.1 Functioning current. The driver shall function when a direct current of not less than 230 milliamperes is applied to the electric initiation circuit.

3.4.2.2 Functioning dimension. The driver shall expand the driving dimple a distance of not less than 0.110-inch against an 8 pound load, when a direct current of not less than 230 milliamperes is applied to the electric initiation circuit.

3.4.2.3 Functioning time. The driver shall expand the driving dimple as specified in 3.4.2.2 within a period of 1 to 25 milliseconds.

3.5 Environmental requirements. Unless otherwise specified, the driver shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.5.1 Temperature, storage condition. The driver shall withstand temperatures from minus 65 to plus 160 degrees F.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

3.5.2 Vibration.

3.5.2.1 Standby condition. The driver shall withstand vibration as specified for Type 1 equipment in MIL-STD-167 up to 25 cps.

3.5.2.2 Operating condition. The driver shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10-inch double amplitude or 10g (g = unit of gravitational acceleration) whichever is less.

3.5.3 Acceleration. The driver shall withstand acceleration of 25g for 4 seconds applied in the direction shown in Figure 1.

3.5.4 Shock, standby condition. The driver shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

3.6 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the driver shall be classified as follows:

a. Preproduction and periodic production inspection. (See 4.5.)

b. Quality conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2.1.)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order, the number of product in each lot shall be three thousand (3000).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

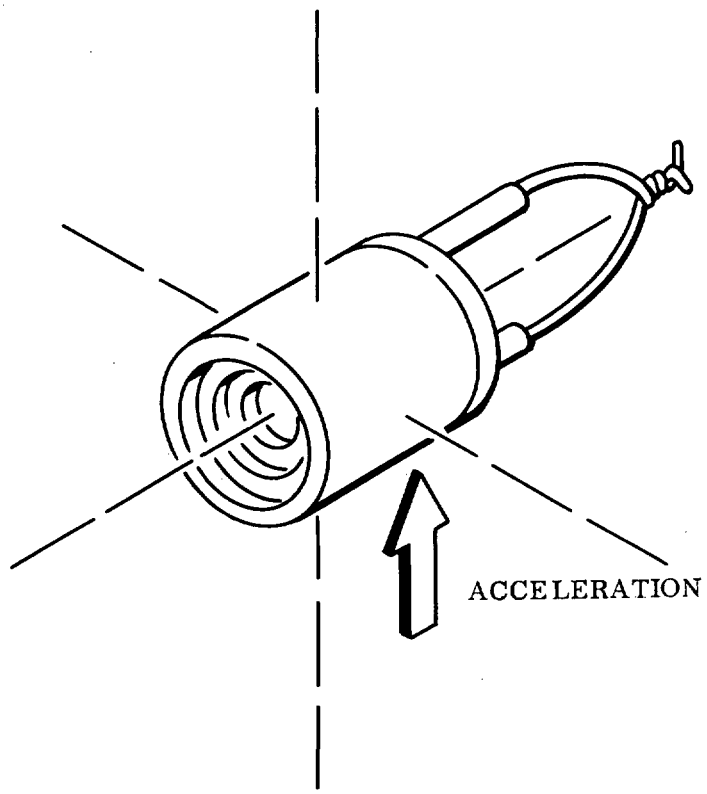



Figure 1. Environmental Testing Axes



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.3.2 Preproduction sample. A preproduction sample of one hundred and fifty (150) drivers, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the driver by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.3 Periodic production sample. From each succeeding lot of three thousand (3000) or less, a random sample of fifty (50) drivers shall be selected. These sample units shall be subjected to the tests of 4.5. The drivers shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table I.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

c. Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the driver inspected as specified in 4.6.

Table I. Preproduction and Periodic Production Test Sequence

| Test | Paragraph Number | Test Quantities Preproduction | Periodic |
|---|---|---|---|
| Quality Conformance Inspection | 4.6* | 150 | 50 |
| Temperature, Storage Condition | 4.5.1.1 | 150 | 50 |
| Quality Conformance Inspection | 4.6 | 50** | 16** |
| Vibration, Standby Condition | 4.5.1.3 | 100 | 34 |
| Shock, Standby Condition | 4.5.1.5 | 100 | 34 |

*Except for function tests of 4.6.1.4
**Samples are expended during functioning



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

Table I. Preproduction and Periodic Production Test Sequence (Continued)

| Test | Paragraph Number | Test Quantities Preproduction | Periodic |
|---|---|---|---|
| Quality Conformance Inspection | 4.6 | 50** | 14** |
| Vibration, Operating Condition | 4.5.1.4 | 50 | 20 |
| Acceleration | 4.5.1.2 | 50 | 20 |
| Quality Conformance Inspection | 4.6 | 50** | 20** |

**Samples are expended during functioning

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests.

| Equipment | Capability |
|---|---|
| a. Ohmmeter, current limited | Measure 1.0 to 5.0 ohms; scale divisions of at least 0.05 ohm; accuracy 2 percent. Maximum current of 10 milliamperes. |
| b. DC power supply current regulated | Regulate direct current at 230 plus or minus 5 and 50 plus or minus 2 milliamperes through a test item load of 4.5 plus or minus 0.5 ohms. |
| c. Megohmmeter | Measure 0 to 50 megohms; accuracy 5 percent minimum; 500 plus or minus 50 volts DC. |
| d. Time interval counter | Measure intervals from 0.10 to 100 milliseconds; accuracy 2 percent minimum; start and stop circuits shall be capable of being triggered with voltages from 0.5 to 30 volts DC. |
| e. Temperature chamber | Maintain temperature at:<br>Minus 65 plus 5 minus 0 degrees F<br>Plus 35 plus 5 minus 0 degrees F<br>Plus 70 plus or minus 5 degrees F<br>Plus 120 plus 0 minus 5 degrees F<br>Plus 160 plus 0 minus 5 degrees F |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and pieces of equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests:

| Equipment | Capability |
|---|---|
| a. Temperature chamber | Maintain temperature at: Minus 65 plus 5 minus 0 degrees F Plus 160 plus 0 minus 5 degrees F |
| b. Vibration testing machine | Control frequency from 20 cps to 2000 cps while subjecting the test item to 0.10-inch double amplitude or 10g acceleration, whichever is less; maintain direction of vibration along specified axes |
| c. Centrifuge | 0 to 27.5g; maintain acceleration of 25 plus 2.5 minus 0g |
| d. Shock equipment, standby | Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape having a duration of 5 plus 3 minus 0 milliseconds; maintain direction along specified axes. |

4.4.3 Test conditions. Unless otherwise specified, the driver shall be subjected to the preproduction and periodic production tests and quality conformance inspection tests under the following conditions:

| | |
|---|---|
| a. Temperature | - Room ambient (65 to 95 degrees F) |
| b. Altitude | - Normal ground atmospheric pressure |
| c. Humidity (Relative) | - Room ambient up to 95 percent. |

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples shall be subjected to the tests specified in 4.5.1, after satisfactorily passing the quality conformance inspections of 4.6.1.1, 4.6.1.2, 4.6.1.3, and 4.6.1.5.

4.5.1 Test procedure. Subject the driver to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection, as specified in Table 1 shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the driver to pass any one of these tests shall constitute a defective unit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.5.1.1 Temperature, storage condition. The driver shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 4 hours prior to performing subsequent tests.

4.5.1.2 Acceleration. The driver, mounted as shown in Figure 2, shall be subjected to acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 1 for not less than 4 seconds.

4.5.1.3 Vibration, standby condition. The driver, rigidly mounted as shown in Figure 2, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 1.

4.5.1.4 Vibration, operating condition. The driver, rigidly mounted as shown in Figure 2, shall be subjected to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minutes, once in each axis.

4.5.1.5 Shock, standby condition. The driver shall be subjected to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, having a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 1. Mount the driver as shown in Figure 2.

4.6 Quality conformance inspection. Samples selected using the plans and procedures set forth in Table II of this specification, shall be subjected to the tests and examinations as described in 4.6.1.

Table II. Quality Conformance Tests and Examinations and AQL

| Test | Sampling Plan | AQL | Test Paragraph |
|---|---|---|---|
| Electric initiation circuit insulation resistance | * | 0.25 | 4.6.1.1 |
| Electric initiation circuit resistance | * | 1.00 | 4.6.1.2 |
| Electric initiation circuit sensitivity | * | 0.25 | 4.6.1.3 |

*MIL-STD-105D Inspection Level II



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

Table II. Quality Conformance Tests and Examinations and AQL (Continued)

| Test | Sampling Plan | AQL | Test Paragraph |
|---|---|---|---|
| Functioning current | * | 0.25 | 4.6.1.4.1 |
| Functioning dimension | * | 1.00 | 4.6.1.4.2 |
| Functioning time | * | 1.00 | 4.6.1.4.3 |
| Visual examination | ** | ** | 4.6.1.5 |
| Preservation, packaging, packing, and marking | ** | ** | 4.7 |

* MIL-STD-105 D Inspection Level II
** One-hundred percent inspection: defect is cause for rejection of individual unit.

4.6.1 Test procedure. The driver shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the driver to pass the tests and examinations shall constitute a failure.

**CAUTION**

The leads of the initiation circuit shall be twisted together at all times except during the tests of 4.6.1.2 and 4.6.1.3.

4.6.1.1 Electric initiation circuit insulation resistance. Measure insulation resistance, using the megohmmeter specified in 4.4.1c, between the two leads of the electric initiation circuit that are twisted together and the case. The resistance shall not be less than 50 megohms with an applied potential of 500 plus or minus 50 volts DC.

4.6.1.2 Electric initiation circuit resistance. Subject the driver to a temperature of 70 plus or minus 5 degrees F for not less than 2 hours. Using the ohmmeter specified in 4.4.1a measure the resistance of the electric initiation circuit. The resistance shall be 4.50 plus or minus 0.50 ohms. Following this test, twist the initiation circuit leads together.

4.6.1.3 Electric initiation circuit sensitivity. Apply a current, using the power supply specified in 4.4.1b, of 50 plus or minus 2 milliamperes through the two separate leads of the electric initiation circuit for not less than 30 seconds. The driver shall not function. Following this test, twist the initiation leads together.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

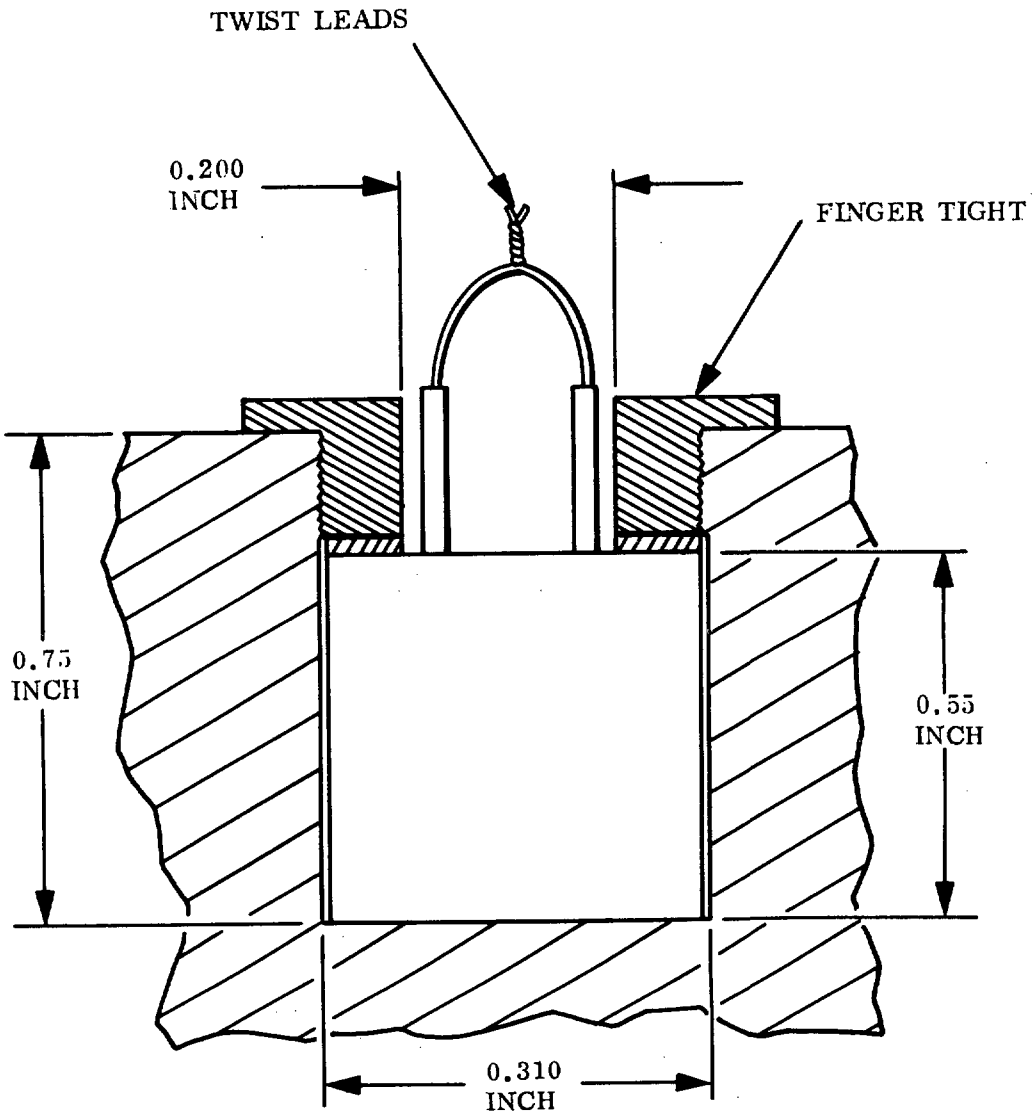



Figure 2. Driver Mounted for Vibration, Shock, and Acceleration



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.6.1.4 Function. Subject the sample drivers to a temperature of minus 65 plus 5 minus 0 degrees F for a duration of not less than 4 hours. After the four-hour period, subject the sample to a temperature of 160 plus 0 minus 5 degrees F for not less than 4 hours. Divide the sample into two equal groups and subject one group to a temperature of plus 35 plus 5 minus 0 degrees F and the other group to a temperature of plus 120 plus 0 minus 5 degrees F for not less than 2 hours. Perform the following functioning current, dimension and time tests simultaneously while maintaining the drivers at the specified temperature or within 30 seconds after removal from the temperature chamber. Use an arrangement similar to that shown in Figure 3.

4.6.1.4.1 Functioning current. Apply a current of 235 plus or minus 5 milliamperes through the electric initiation circuit. The driver shall function.

4.6.1.4.2 Functioning dimension. Measure the movement of the dimple restrained by an eight pound axial spring load during functioning of the driver. The movement shall not be less than 0.110 inch.

4.6.1.4.3 Functioning time. Measure the elapsed time between application of current to the initiation circuit and dimple movement of 0.110 inch. The time interval shall be from 1 to 25 milliseconds.

4.6.1.5 Visual examination. Visual examination shall be made on each driver for delivery to the procuring agency. The driver shall be examined for conformance to the requirements of good workmanship specified in 3.6. Nonconformance is cause for rejection of individual unit.

4.7 Preservation, packaging, packing, and marking. The driver shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

## 5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (See 6.2b and 6.4).

5.1.1 Level A. Unless otherwise specified in the contract, order, or requisition, the driver shall be preserved and packaged in accordance with Method IId of MIL-P-116.

5.1.2 Level C. Cleaning, drying, preservation and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing.

5.2.1 Level A. Unless otherwise specified in the contract, order or requisition, the driver shall be packed in exterior type shipping containers meeting the requirements of PPP-B-621. As far as practical exterior containers



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

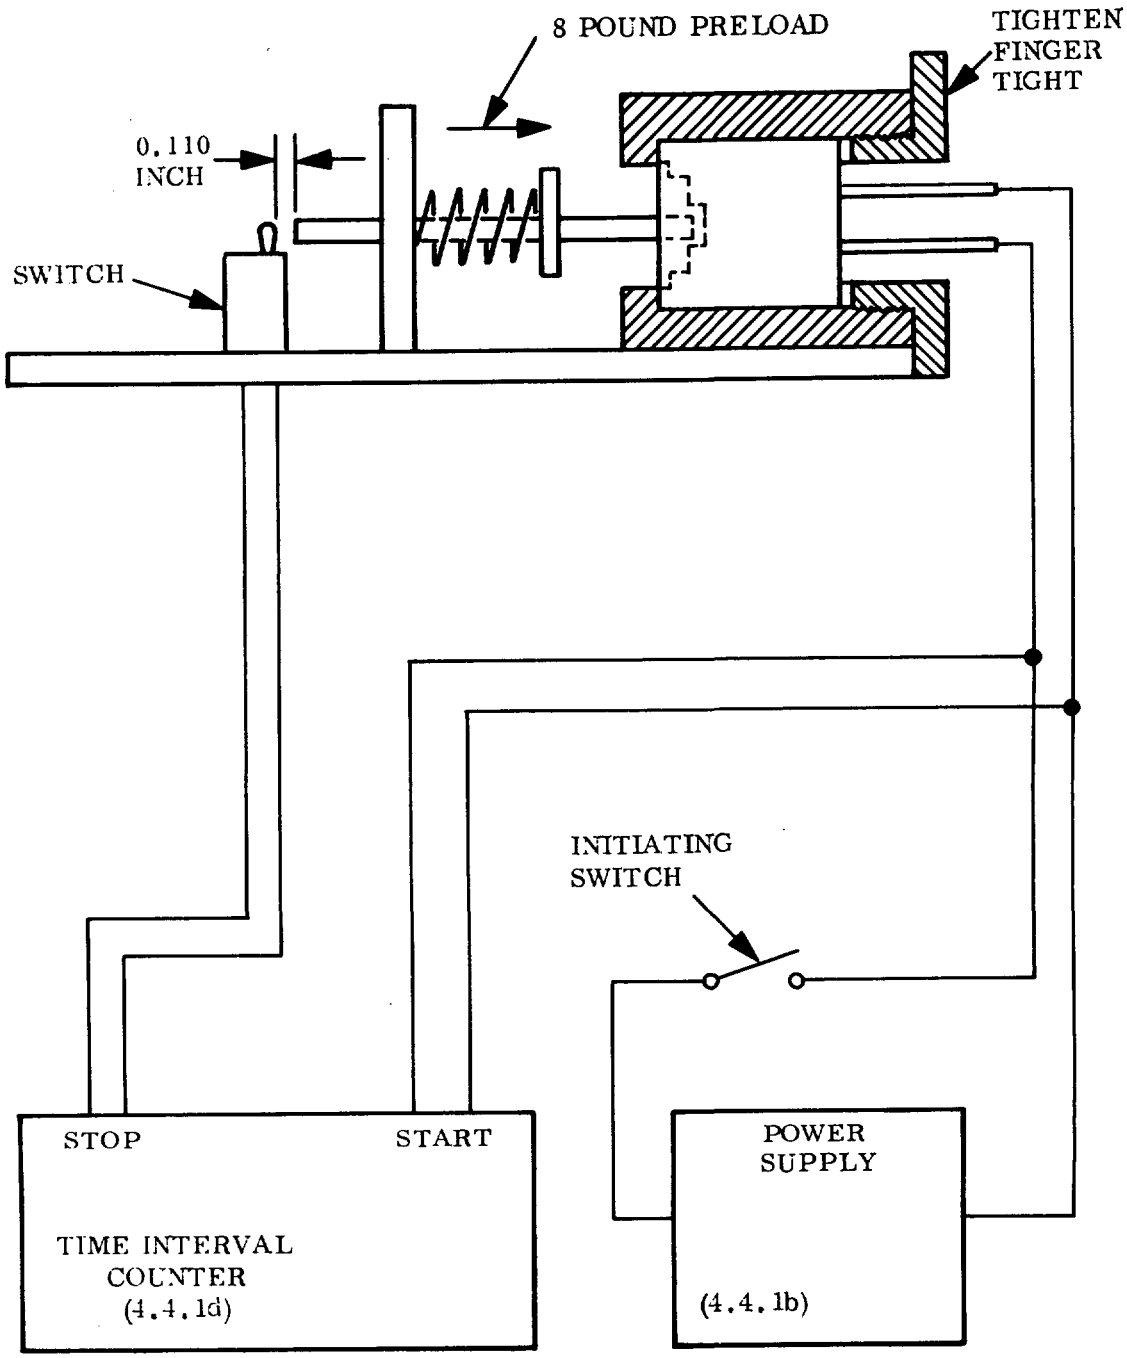



Figure 3. Driver Functional Test Circuit



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

shall be of uniform shape and size, with the minimum cube and tare consistent with the protection required. The gross weight of each pack shall be limited to approximately 100 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers shall be provided with a case liner conforming to MIL-L-10547, and shall be sealed in accordance with the appendix thereto.

5.2.2 Level C. Drivers shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall conform to 49 CFR 71-78 or other common carrier regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Marking of containers. Unless otherwise specified in the contract, order, or requisition, each container shall be marked with the name of the supplier, contract or order number and the number of drivers in the container in accordance with MIL-STD-129 and 49 CFR 71 to 78.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. The driver is intended to be used in missile and shipboard applications where a short travel mechanical motion is required on a one-time basis.

6.1.2 Description. The driver is an electrically initiated device containing a pyrotechnic composition. When initiated, the expanding gasses produced within the driver force a metal diaphragm from a dimpled position to an extended position. This expansion produces a usable mechanical motion.

6.2 Order data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Required level of preservation and packaging.

c. Required level of packing.

d. Any exceptions to this specification.

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

6.3 Definitions.

6.3.1 Unit condition.

6.3.1.1 Operating. The condition of the driver during missile operation.

6.3.1.2 Standby. Standby is the condition of the driver when aboard ship and assembled with the end item.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging and packing shall be as specified in FED-STD-102.

6.5 General safety precautions. The loading, assembly, and handling of explosives, ammunition, ammunition components, fuzes, detonators, primers, tracers, boosters, pyrotechnics, etc., and subassemblies thereof, involve hazardous operations and therefore require suitable explosives safety precautions. Use of this specification shall not be construed as to relieve the contractor or manufacturer of responsibility for the safety of his operations. Listed below are the minimum provisions which contractor or manufacturer (loader) of the above items should observe in order to fulfill his responsibility for safety. At Bureau of Naval Weapons, Navy Department, and other Government plants, these provisions are mandatory. Such other warnings and precautions, pertinent to the operational effectiveness or safety during use of loading of the specified item, are included in the detail provisions of the specification.

6.5.1 All loading operations shall be conducted in a neat and orderly manner.

6.5.2 Safe equipment and methods should be utilized for transporting and handling explosives and loaded parts. Where required, remote control barricaded handling equipment shall be used for explosives operations, such as mining, pouring, weighing, charging, sifting, drying, pressing, casting, crimping, etc.

6.5.3 Personnel handling detonators, primers, delay elements, lead-ins, boosters, and related parts which effect functioning, should in so far as practicable, avoid using bare fingers or improper equipment in order to prevent damage, corrosion, or deterioration from perspiration or other contaminating deposits.

6.5.4 The exposure of explosive materials and related parts should be so controlled as to minimize the absorption of moisture from the atmosphere or other sources during loading and handling operations.

6.5.5 All explosives and completely or partially loaded items should be stored in suitable storage magazines located in accordance with the American Table of Distances (ATD) or other applicable safety standards; and, while in process, in safety lockers or chests if in loading rooms, or in adequate ready



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

for service magazines, located in accordance with intra-plant distances when outside of loading rooms. For Navy explosives loading plants, the provisions of the Armed Services Explosives Safety Board covering quantity-distance relations for explosives, shall apply.

6.5.6 Proper care should be exercised at all times to protect personnel from accidents, fires or explosions, and to limit damage to equipment and loading areas. In this connection, the following precautionary measures should be observed.

6.5.6.1 Employ properly proportioned and properly located protective barricades, screens or shields at all required points.

6.5.6.2 Keep only minimum limited quantities of explosives and completed or partially loaded parts present at each stage of operation.

6.5.6.3 Keep explosives and explosive parts in approved covered receptacles with covers in place when material is not being taken out of or put into the receptacles. Where necessary, receptacles should be conductive to ground electrostatic charges.

6.5.6.4 Protect operations from electrostatic charges by effectively grounding all machinery, equipment, and fixtures; and, where necessary, employ suitable grounded conductive coverings for floors, work benches and tables, and workers' conductive shoes. Workers clothing of a type to minimize the accumulation of static charges should be employed. Fabrics such as silk and nylon, which promote static generation should be avoided. Additional grounding devices such as grounded bracelets for workers should be employed where operations are conducted with items which are usually sensitive to initiation by static electricity. Such items include initiation explosives, tracer mixtures; and low-energy type electric primers, detonators, and squibs. The latter types of items should have the free ends of lead wires bared and twisted together, and be packed in relatively small groups wrapped in bare non-insulated aluminum foil or other uncoated metal foil. During assembly and processing operations such sensitive electric items should be short circuited by clips or other devices until installed with safety shunt in the final device. Additional precautions for these items should include mechanical shielding to contain or deflect fragments and blast, also electrical shielding of these items from induced electric current generated by sources such as lightning, static, radiations from communications apparatus, radar, or high frequency heating apparatus, etc. Where necessary for safety, humidity of work rooms should be increased, as required to lessen electrostatic effects without excessive moisture absorption.

6.5.6.5 Protect all explosive operations from effects of electric current originating from equipment such as soldering irons, heaters, switches, wiring, motors, lights, test instruments, etc., by suitable insulation, grounding, separation or shielding. Such electric sources may initiate explosives by heat,



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

sparks, arcs, or due to completing an electric circuit through an electric primer, detonator, or squib. Circuits may be inadvertently completed, for example, from a defective electronic soldering iron through a grounded contact. All electric type primers, detonators, or squibs provided with wire leads should have the free ends of the wires bared and twisted together to short circuit each unit, except when in process of assembly into a finished item. Where practicable, removable short circuiting clips, or other devices should be employed during manufacturing operations involving electric primers, detonators, or squibs.

6.5.6.6 Enforce, where necessary, the wearing of suitable safety footwear, gloves, goggles, respirators, and impregnated garments to protect personnel against burns, poisoning, and associated industrial hazards.

6.5.6.7 Allow no fires or exposed electrical or other sparking equipment, and little or no flammable material to be present in loading, handling, and storage spaces. Enforce proper "Match" and "No Smoking" rules where necessary.

6.5.6.8 Enforce good housekeeping and maintain effective policing, inspection and supervisory methods throughout the loading area and surroundings. Employ effective cleaning methods periodically to minimize the accumulation of explosives or explosive dust and other contamination upon, and assure its removal from floors, walls, ceilings, ledges, tables, benches, piping, and equipment or the items loaded; also, clean up any spilled material immediately.

★ U. S. GOVERNMENT PRINTING OFFICE—1967: 303-218 Z214



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-D-82490(OS) DRIVER, GAS OPERATED MARK 8 MOD 0

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

C-8870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ordnance Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL ORDNANCE SYSTEMS COMMAND (ORD 9343)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.