"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft legislation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: USER SYMBOLS:

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6760

1. SCOPE

1.1 THIS STANDARD PROVIDES THE DIMENSIONS AND SPECIFICATIONS FOR CASSETTES AND REELS TO BE USED WITH COMPATIBLY DESIGNED SUPER 8 GAUGE MOTION-PICTURE PROJECTORS.

1.2 FOUR MODELS OF CASSETTES ARE SPECIFIED; MODEL A FOR NOMINAL 50-FOOT SIZE REELS, MODEL B FOR NOMINAL 100-FOOT SIZE REELS, MODEL C FOR NOMINAL 220-FOOT SIZE REELS, AND MODEL D FOR NOMINAL 400-FOOT SIZE REELS. THE CASSETTES SHALL USE SUPER 8 MOTION-PICTURE FILM WITH NOMINAL 50 AND 100-FOOT CAPACITY MOTION PICTURE REELS MEETING THE DIMENSIONAL SPECIFICATIONS OF AMERICAN NATIONAL STANDARD ANSI PH22.160, PROJECTION REELS FOR SUPER 8 MOTION-PICTURE FILM. REELS FOR THE NOMINAL 220-FOOT AND 400-FOOT CASSETTES SHALL MEET THE DIMENSIONAL REQUIREMENTS SPECIFIED IN THIS STANDARD.

1.3 A SYSTEM OF CODE NOTCHES TO AUTOMATICALLY CUE PROJECTOR MECHANISM TO NECESSARY SOUND AND SPEED FUNCTIONS IS ALSO SPECIFIED.

2. MATERIALS

2.1 THE MATERIAL FOR FABRICATION OF THE CASSETTES SHALL BE AS SPECIFIED HEREIN. MATERIALS OTHER THAN THOSE SPECIFIED HEREIN MAY BE USED, PROVIDED THEY MEET THE DIMENSIONAL STABILITY AND IMPACT CHARACTERISTICS OF THE MATERIALS SPECIFIED HEREIN TO AN EQUAL OR BETTER DEGREE.

2.1.1 TRANSPARENT COVERS, A, B, C, AND D. THE MATERIAL SHALL BE MODIFIED ACRYLIC "ACRYLITE MP-20-731, BRONZE", SUPPLIED BY AMERICAN CYANAMID CO., SOUTH CHERRY STREET, WALLINGFORD, CONN. 06492

2.1.2 BASES A AND B. THE MATERIAL SHALL BE MODIFIED STYRENE "DYLENE 80, M23452, BLACK", SUPPLIED BY KOPPERS CO., 2112 KOPPERS BLDG., PITTSBURGH, PA 15219.

2.1.3 BACKS C AND D. THE MATERIAL SHALL BE GLASS FILLED SAN "ACRYLASAR J40-20, BLACK, BK219" SUPPLIED BY FIBERFIL, 1701 NO. HEIDELBACH, EVANSVILLE, IND. 47717.

2.1.4 REEL CORES C AND D. THE MATERIAL SHALL BE PLATABLE ABS "CYCOLAC EP3510" SUPPLIED BY MARBON CHEMICAL CO., WASHINGTON, W. VA. PART SHALL BE ELECTROLYSIS PLATED WITH NICKEL.

2.1.5 REEL FLANGES C AND D. THE MATERIAL SHALL BE 0.030 ALUMINUM ALLOY, 5052-H25, PRECOATED BOTH SIDES WITH GRAY ACRYLIC ENAMEL, SUPPLIED BY ALUMINUM CO. OF AMERICA, 1219 ALCOA BLDG., PITTSBURGH, PA. 15219. PARTS SHALL BE TEFLON COATED ON ONE SIDE (INNER SURFACES).

(COPIES OF THE TECHNICAL SPECIFICATIONS FOR THE MATERIALS LISTED SHOULD BE OBTAINED FROM THE IDENTIFIED SUPPLIERS.)

3. DIMENSIONS

3.1 DIMENSIONS SHALL BE AS SHOWN IN THE FIGURES AND GIVEN IN THE TABLES. IN SOME CASES MILLIMETER VALUES ARE NOT DIRECT CONVERSIONS OF INCH VALUES TO FACILITATE COMPATIBLE SPECIFICATIONS IN INTERNATIONAL RECOMMENDATIONS. THESE DIMENSIONS ARE NOTED IN THE TABLES AND THE INCH VALUES ARE THEN DIRECT CONVERSIONS FROM THE MILLIMETER VALUES. ALSO, WHERE NECESSARY, MILLIMETER VALUES ARE CARRIED AN EXTRA DECIMAL PLACE BEYOND USUAL PRACTICE.

APPROVED 1 APR 1974 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

3.2 THE DIMENSIONS AND ILLUSTRATIONS IN THE FIGURES DO NOT RESTRICT THE AXIAL ORIENTATION OF THE CASSETTES IN USE (VERTICAL, HORIZONTAL, ETC.).

3.3 THE CASSETTE MOUNTING AND LATCHING SURFACES FOR MODEL A AND B ARE IDENTICAL WITH SOME OF THE DIMENSIONS COMMON IN THE A, B, C, AND D CASSETTES TO PROVIDE COMPATIBLE MOUNTING.

3.4 THE DATUM PLANES X, Y, AND Z USED FOR DIMENSIONING ARE MUTUALLY PERPENDICULAR.

3.4.1 DATUM PLANE X. DATUM PLANE X IS A PLANE FORMED BY TARGET POINTS X_1 AND X_2.

3.4.2 DATUM PLANE Y. DATUM PLANE Y IS A PLANE COINCIDENT WITH TARGET POINT Y_1.

3.4.3 DATUM PLANE Z. DATUM PLANE Z IS A PLANE FORMED BY TARGET POINTS Z_1, Z_2, AND Z_3. TARGET POINTS Z_1 AND Z_2 ARE COINCIDENT WITH CASSETTE MOUNTING SURFACE AND Z_3 COINCIDENT WITH A POINT, LOCATED BY A GAUGE BALL OF C_4 DIAMETER, ABOVE MOUNTING RAIL.

3.5 THE POINTS USED TO ESTABLISH DATUM PLANES X, Y, AND Z, MAY BE USED FOR GAUGING THE CASSETTE.

3.6 MOST OF THE CASSETTES' EXTERNAL DIMENSIONS SHOWN IN FIGURES 3, 4, 8, AND 9 ARE PROVIDED THE MAXIMUM SPACE CONFIGURATION NEEDED IN THE DESIGN OF CASSETTE-COMPATIBLE PROJECTORS. THESE MAXIMUM SPECIFICATIONS ARE NEEDED TO PROVIDE FLEXIBILITY IN THE DESIGN OF EXTERNAL CASSETTE CONFIGURATIONS AND ARE NOT TO BE TAKEN AS RESTRICTIONS.

3.7 NOTCHES TO AUTOMATICALLY CUE PROJECTORS TO NECESSARY FRAME RATE AND SOUND FUNCTIONS ARE AS SHOWN IN FIGURE 5 BY DIMENSIONS K_1 THROUGH K_6.

3.7.1 TWO ROWS OF NOTCHES 1 THROUGH 4 ARE PROVIDED. THE DEPTH OF THE FIRST ROW IS ESTABLISHED BY DIMENSIONS K_2 AND OF THE SECOND ROW BY DIMENSION K_1.

3.7.2 THE SECOND ROW OF NOTCHES IS USED ONLY IN CONJUNCTION WITH THE FIRST ROW AND WHEN USED, THE POSITION IS REFERRED TO AS "DOUBLE NOTCHED."

3.7.3 COMPLETE REMOVAL OF MATERIAL SHOULD BE MADE WHEN ADJACENT NOTCHES ARE USED.

3.7.4 NOTCH FUNCTIONS ARE AS FOLLOWS: (SEE FIGURE 5.)

POSITION	1	2	3	4
NO NOTCH	PLAYBACK	18 FPS	SILENT	
NOTCH	RECORD	24 FPS	MAGNETIC SOUND	

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS
REVIEWER SYMBOLS
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

3.8 THE CASSETTE ORIENTING NOTCH (FIGURE 1) ESTABLISHED BY A9, A10, AND A21 MAY HAVE A RADIUS IN THE UPPER INSIDE CORNERS WITH A MAXIMUM VALUE EQUAL TO ONE-HALF THE DIFFERENCE BETWEEN A10 AND A9.

3.9 ALL MOUNTING AND GAUGING SURFACES SHOWN IN FIGURE 1 ARE TO BE PLANES BUT MAY BE FORMED BY BOSSES OR PADS AND THEY NEED NOT BE CONTINUOUS. LATCHING CUTOUT AREAS ARE ALSO SHOWN IN FIGURE 1.

3.9.1 LATCHING CUTOUT AREAS ARE ESTABLISHED BY DIMENSIONS A2, A16, A17, AND A11 AND THE LATCHING POINTS BY DIMENSIONS B2, B4 THROUGH B10. THE OVERALL WIDTH OF THE CASSETTE, DIMENSION B3, MAY ALSO BE USED AS A LATCHING SURFACE. THE REMAINING DIMENSIONS ESTABLISH THE MOUNTING AND GAUGING SURFACES.

3.10 THE ANGLE SPECIFIED BY DIMENSIONS B_5 AND C_7 IN FIGURES 2 AND 3 APPLY TO ALL FOUR CORNERS OF THE OPENING.

3.11 THE WIDTH OF THE FILM GUIDE IS DEFINED BY DIMENSIONS E2, E9, D7, AND D8 AND THE TRANSITION MUST BE SMOOTH. THIS CONDITION APPLIES TO THE A, B, C, AND D CASSETTE SIZES. (SEE FIGURE 2.)

3.12 THE DIMENSIONS SPECIFIED IN FIGURE 12 APPLY TO THE SIZE NUMBER 15 REEL OF 220-FOOT CAPACITY FOR USE WITH MODEL C CASSETTES, AND SIZE NUMBER 19 REEL OF 400-FOOT CAPACITY FOR USE WITH MODEL D CASSETTES. REEL DIMENSIONS FOR MODEL A AND MODEL B CASSETTES ARE SPECIFIED IN ANSI PH22.160.

3.13 DIMENSIONS HH APPLIES FROM THE SURFACE OF THE HUB TO THE PERIPHERY OF THE FLANGES. (SEE FIGURE 12.)

3.14 THE MINIMUM DIMENSION KK REPRESENTS THE DIAMETER OF THE CENTRAL PORTION OF THE REEL CENTERED ON THE SPINDLE HOLE AXIS, OVER WHICH THE EFFECTIVE CENTRAL THICKNESS JJ OF THE REEL IS INTENDED TO APPLY. (SEE FIGURE 12.)

3.15 THE MAXIMUM VOLUME DURING ROTATION IS MEASURED WITH A TIGHT FITTING TEST SPINDLE WHICH LOCATES ON THE KK DIAMETER (SOLID FLANGE SIDE) BY MEANS OF A SHOULDER OR FLANGE 0.75 INCH (19.00MM) IN DIAMETER. THE REFERENCE PLANE OF ROTATION FOR BOTH FLANGES IS A PLANE PERPENDICULAR TO DATUM CYLINDER A. (SEE FIGURE 12.)

3.16 THE CONCENTRICITY OF THE SPINDLE HOLE CC AND HUB EE IS DETERMINED AS A RUN OUT SPECIFICATION BY DIMENSION U. A SIMILAR ALLOWANCE IS PROVIDED FOR THE CONCENTRICITY OF THE SPINDLE HOLE AND THE FLANGES IN THE MAXIMUM VOLUME OF ROTATION DIAGRAM BY HAVING DIMENSION V EXCEED DIMENSION M MAXIMUM BY 0.031 INCH (0.80MM). (SEE FIGURE 12.)

4. NOTES

4.1 THE INTERNAL DIMENSIONS OF THE A AND B CASSETTES PROVIDE SPACE FOR REELS CONFORMING WITH THE SPECIFICATIONS OF ANSI PH22.160 FOR SUPER 8 HAVING NOMINAL CAPACITIES OF 50 AND 100 FEET. THE C AND D 220-FOOT AND 400-FOOT CAPACITY CASSETTES PROVIDE SPACE FOR REELS CONFORMING TO THE DIMENSIONS SPECIFIED HEREIN.

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Air Systems Command, AIR-5301, Washington, DC 20361 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 3 OF 27

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/use: information is current as of the date of this document. For future coordination of changes in this document, draft circulation should be based on the information in the current DODISS."

4.2 ALL LATCHING AND MOUNTING PROVISIONS MUST BE INCLUDED IN THE CASSETTE, ALTHOUGH THE COMBINATIONS USED BY THE PROJECTOR MECHANISM ARE OPTIONAL.

4.3 THE AREA ESTABLISHED BY A27, A28, AND A29 (FIGURE 1) PROVIDES A MOUNTING SURFACE COPLANAR WITH DATUM PLANE Z.

4.4 ANY ATTACHED LABELS OR SEALS MUST FALL WITHIN THE EXTERNAL DIMENSIONS ESTABLISHED FOR THE CASSETTE.

4.5 REELS MADE ACCORDING TO THIS STANDARD SHALL ALSO BE PROVIDED WITH A MEANS OF SECURING THE FULL-WIDTH END OF THE FILM TO THE REEL. THIS MAY BE ACCOMPLISHED BY A SLOT IN THE REEL HUB AND A MINIMUM CUTOUT AREA (AS SPECIFIED IN PH22.160) AND THE USE OF THE FILM RETENTION PLUG OR CLIP, OR BY A UNIQUE DESIGN.

4.6 THE FLANGES OF THE REEL SHOULD HAVE THREE RADIAL DRIVING SLOTS PLACED AT APPROXIMATELY 120 DEGREES AND CONFORMING TO DIMENSIONS D AND B SPECIFIED IN FIGURE 12 AND TABLE XIII. THE DRIVE SLOTS OF BOTH FLANGES ARE ALIGNED. IF PROPERLY ALIGNED, THE REEL WILL FIT ON A TEST SPINDLE (GAUGE) OF 0.50 INCH (12.7mm) DIAMETER WITH A RADIAL SPINDLE DRIVE KEY HAVING AN AXIAL LENGTH FROM THE SPINDLE SHOULDER GREATER THAN THE WIDTH J OF THE REEL; A THICKNESS OF 0.058 INCH (1.47mm); AND A HEIGHT, MEASURED AS A RADIUS FROM THE SPINDLE AXIS, OF 0.36 INCH (9.1mm).

4.7 THE EMPTY WEIGHT OF EITHER REEL SHALL NOT EXCEED 200 GRAMS.

4.8 TO REDUCE FRICTIONAL FORCES FROM STATIC BUILDUP, THE FLANGES AND THE CORE OF THE REEL SHALL BE CONDUCTIVE FOR STATIC ELIMINATION.

4.9 ONE FLANGE SHALL BE MADE SOLID WITH THE EXCEPTION OF THE HUB AREA AND IDENTIFYING HOLES (SEE 4.10.1). THIS FLANGE SHALL BE THE ONE CLOSEST TO THE UNPERFORATED SIDE OF THE FILM WHEN WOUND IN THE USUAL MANNER.

4.10 TO PROVIDE INFORMATION FOR THE DESIGN OF COMPATIBLE PROJECTOR FILM EXTRACTOR MECHANISMS AND TO MINIMIZE THE POSSIBILITIES OF INTERFERENCE WITH THE INTERNAL FILM GUIDE RAIL, FILM QUANTITY LOADS SHOULD FALL WITHIN 1.626 INCH (41.30mm) MINIMUM DIAMETER FOR MODELS A AND B, 2.600 INCH (66.05mm) MAXIMUM DIAMETER FOR MODEL A, AND 3.559 INCH (90.40mm) MAXIMUM DIAMETER FOR MODEL B, 3.700 INCH (93.98mm) MINIMUM DIAMETER FOR MODEL C, 4.900 INCH (124.46mm) MINIMUM DIAMETER FOR MODEL D, 5.600 INCH (142.24mm) MAXIMUM DIAMETER FOR MODEL C, AND 7.070 INCH (179.58mm) MAXIMUM DIAMETER FOR MODEL D.

4.10.1 SOME VISIBLE MEANS OF IDENTIFYING THE MAXIMUM DIAMETER OF THE WOUND FILM SHALL BE PROVIDED ON ONE OR BOTH FLANGES.

4.10.2 IF OPAQUE MATERIALS ARE USED FOR THE FLANGES AND A HOLE IS NECESSARY FOR SUCH IDENTIFICATION THE HOLES SHALL NOT BE LARGE ENOUGH TO ALLOW FILM TO PROTRUDE THROUGH IT.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1 APR 1974 REVISED

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

4.11 TO FACILITATE THREADING AND TO INSURE PROJECTION OF THE FINAL FRAME OF PICTURE INFORMATION BEFORE REWINDING, THE FOLLOWING LEADER AND TRAILER LENGTHS ARE REQUIRED: LEADER FOR A AND B, 168 FRAMES (28 INCHES, 711cm); FOR C, 216 FRAMES (36 INCHES, 913cm); FOR D, 228 FRAMES (38 INCHES, 965cm); TRAILER, FOR ALL CASSETTES, 118 FRAMES (19.69 INCHES, 500.00cm).

4.12 IF HEAVY MATERIALS ARE USED FOR REEL CONSTRUCTION, CAUTION SHOULD BE EXERCISED THAT THE MOMENT OF INERTIA DOES NOT EXCEED 10×10^{-2} OUNCE INCH/SECONDS^2.

4.13 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

(AMERICAN NATIONAL STANDARDS MAY BE OBTAINED FROM THE AMERICAN NATIONAL STANDARDS INSTITUTE, INC., 1430 BROADWAY, NEW YORK, NEW YORK, 10018)

4.14 THE GOVERNMENT HAS A PAID UPLICENSE UNDER U.S. LETTERS PATENTS 3,463,409; 3,547,373; 3,554,462; 3,491,969; 3,463,411; 3,506,212; 3,465,980; 3,486,710; 3,617,013; 3,648,932; DES. 215,359; DES. 215,361; DES. 215,360; DES. 217,298; DES. 217,299; DES. 217,300; DES. 217,301; DES. 217,302; AND DES. 217,303; AND U.S. APPLICATION FOR LETTERS PATENT SERIAL NO. 9,292 FILED 6 FEBRUARY 1970 FOR THE BENEFIT OF MANUFACTURERS OF THE ITEMS DISCLOSED HEREIN EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT.

4.15 MARKING. - CASSETTES AND REELS SHALL BE MARKED WITH THE NUMBER OF THIS STANDARD, FOLLOWED BY THE DASH LETTER CORRESPONDING TO THE MODEL OF CASSETTE SPECIFIED HEREIN FOR EACH OF THE RESPECTIVE FILM CAPACITIES, AND WITH THE MANUFACTURER'S NAME, REGISTERED TRADE MARK, OR THE FEDERAL SUPPLY CODE FOR MANUFACTURER'S. MARKING SHALL BE PERMANENTLY AND LEGIBLY STAMPED, STENCILED, OR MOLDED ONTO AN EASILY VISIBLE SURFACE OF THE REEL AND CASSETTE IN A MANNER NOT TO INTERFERE WITH THE FUNCTIONAL OPERATION OF THE CASSETTE.

CUSTODIANS:
ARMY - EL
NAVY - AS
AIR FORCE - 70

PREPARING ACTIVITY:
NAVY - AS

PROJECT NUMBER: 6760-0547

REVIEW ACTIVITIES:
ARMY - EL
NAVY - AS
AIR FORCE - 70

USER ACTIVITIES:
NAVY - AS
AIR FORCE - 70

APPROVED 1 APR 1974 REVISED

"Review/new information is current as of the date of this document. For future coordination of changes to this document, draft legislation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: USER SYMBOLS:

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust: ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 5 OF 27

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

TABLE I

	INCHES		MILLIMETERS	
A_1	0.330 BASIC		8.38 BASIC	
A_2	0.250 ± 0.007		6.35 ± 0.20	
A_3	0.327 MIN	0.333 MAX	8.30 MIN	8.45 MAX
A_4	1.750 BASIC		44.45 BASIC	
A_5	0.179 MIN	0.238 MAX	4.55 MIN	6.05 MAX
A_6	0.131 MIN	0.144 MAX	3.35 MIN	3.65 MAX
A_7	0.075 MIN		1.90 MIN *	
A_8	0.148 MIN	0.154 MAX	3.75 MIN	3.90 MAX
A_9	2.636 MAX		66.95 MAX	
A_{10}	2.799 MIN		71.10 MIN *	
A_{11}	0.010 MIN	0.014 MAX	0.26 MIN	0.35 MAX
A_{12}	3.006 MIN		76.35 MIN	
A_{13}	1.577 BASIC		40.056 BASIC **	
A_{14}	3.162 MAX		80.30 MAX	
A_{15}	2.994 MIN		76.05 MIN	
A_{16}	0.378 ± 0.008		9.60 ± 0.20	
A_{17}	1.191 ± 0.006		30.25 ± 0.15	
A_{18}	1.390 MIN	1.437 MAX	35.30 MIN	36.50 MAX
A_{19}	1.417 MIN	1.512 MAX	36.00 MIN	38.40 MAX
A_{20}	1.512 MAX		38.40 MAX	
A_{21}	1.8 MAX		45.7 MAX	
A_{22}	2.777 ± 0.008		70.55 ± 0.20 *	
A_{23}	3.150 MAX		80.00 MAX	
A_{24}	1.642 MIN		41.70 MIN	
A_{25}	1.642 MIN	1.740 MAX	41.70 MIN	44.20 MAX
A_{26}	0.342 MIN	0.358 MAX	8.70 MIN	9.10 MAX

APPROVED 1 APR 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 6 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23083

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

TABLE I
(CONTINUED)

	INCHES		MILLIMETERS	
A_{27}	0.563 MIN	0.593 MAX	14.30 MIN*	15.05 MAX*
A_{28}	1.179 MIN	1.201 MAX	29.95 MIN	30.50 MAX
A_{29}	2.563 MIN	2.598 MAX	65.10 MIN	66.00 MAX
A_{30}	2.071 MIN	2.091 MAX	52.60 MIN	53.10 MAX
B_1	0.507 REFERENCE		12.878 REFERENCE **	
B_2	0.043 MIN	0.063 MAX	1.10 MIN	1.60 MAX
B_3	0.910 MIN	0.941 MAX	23.10 MIN	23.90 MAX
B_4	0.230 MIN		5.85 MIN	
B_5	0.096 MIN		2.45 MIN	
B_6	45° ± 2°		45° ± 2°	
B_7	10° ± 1°		10° ± 1°	
B_8	0.014 MAX		0.35 MAX	
B_9	0.114 MIN	0.124 MAX	2.90 MIN	3.15 MAX
B_{10}	0.120 MIN		3.05 MIN	
B_{11}	0.199 MIN	0.213 MAX	5.05 MIN	5.40 MAX
B_{12}	5° ± 1°		5° ± 1°	
C_1	0.063 BASIC		1.60 BASIC	
C_2	0.122 MIN	0.138 MAX	3.10 MIN	3.50 MAX
C_3	0.063 BASIC		1.60 BASIC	
C_4	0.014 DIA BASIC		0.356 DIA ** BASIC	
C_5	0.421 MAX		10.70 MAX	
C_6	0.587 MIN		14.90 MIN	

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

** ADDITIONAL DECIMAL PLACE INTENTIONAL.

APPROVED 1 APR 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft regulation should be based on the information in the current DODISS."


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairs are shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 7 OF 27

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 1583

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

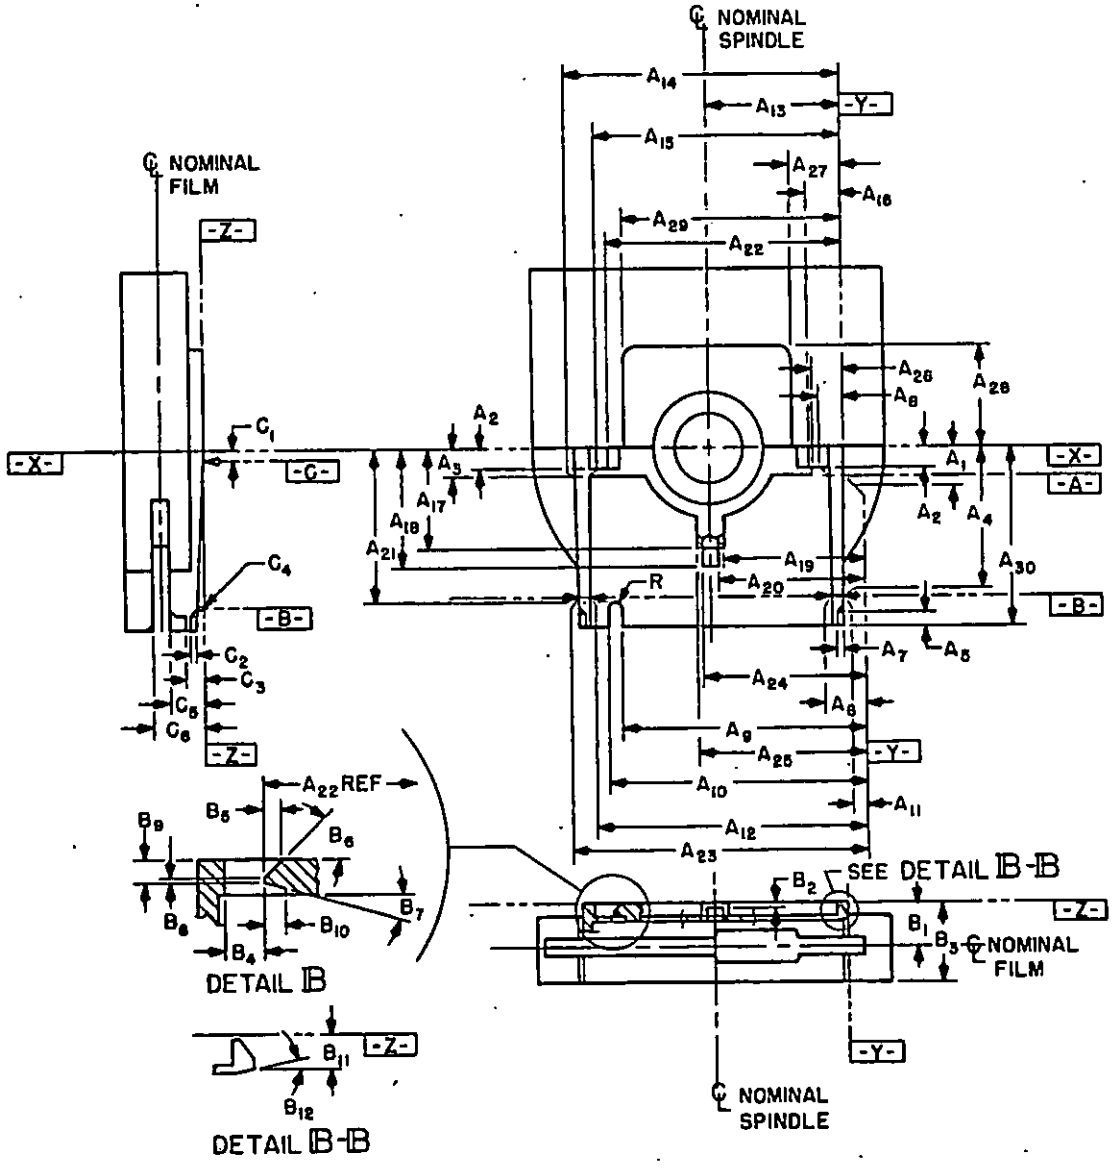

NOTE: SEE TABLE I FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 1

MOUNTING, LATCHING, & DATUM DIMENSIONS

Cassette Models A & B

APPROVED 1 MAY 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 8 OF 27

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:

REVIEWER SYMBOLS:

TABLE II

	INCHES		MILLIMETERS	
D_1	0.370 MIN	0.386 MAX	9.40 MIN	9.80 MAX
D_2	1.872 MIN	1.911 MAX	47.53 MIN	48.55 MAX
D_3	2.025 MIN RADIUS		51.45 MIN RADIUS	
D_4	1.850 MIN	1.870 MAX RADIUS	47.00 MIN	47.50 MAX RADIUS
D_5	1.071 MIN	1.089 MAX	27.20 MIN	27.65 MAX
D_6	0.620 MIN	0.640 MAX	15.75 MIN	16.25 MAX
D_7***	0.396 MIN	0.410 MAX	10.05 MIN*	10.40 MAX*
D_8***	0.594 MIN	0.622 MAX	15.10 MIN	15.80 MAX
E_1	VALUE OMITTED			
E_2	0.374 MIN	0.390 MAX	9.50 MIN	9.90 MAX
E_3	0.309 MIN	0.325 MAX	7.85 MIN	8.25 MAX
E_4	0.224 MAX		5.70 MAX	
E_5	15° ± 2°		15° ± 2°	
E_6	0.567 MIN	0.587 MAX	14.40 MIN	14.90 MAX
E_7	0.571 MIN		14.50 MIN	
E_8	0.683 MIN	0.707 MAX	17.35 MIN	17.95 MAX
E_9	0.620 MIN	0.642 MAX	15.75 MIN	16.30 MAX

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

*** APPLIES TO AREA ABOVE DATUM PLANE X ONLY.

Action/user information is optional as of the date of this document. For future coordination of changes to this document, draft revision should be based on the information in the current DODISS.

APPROVED 1 APR 1974 REVISED


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Suggestions for improvements and design applications and for regulations are invited to be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 9 OF 27

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS 6760

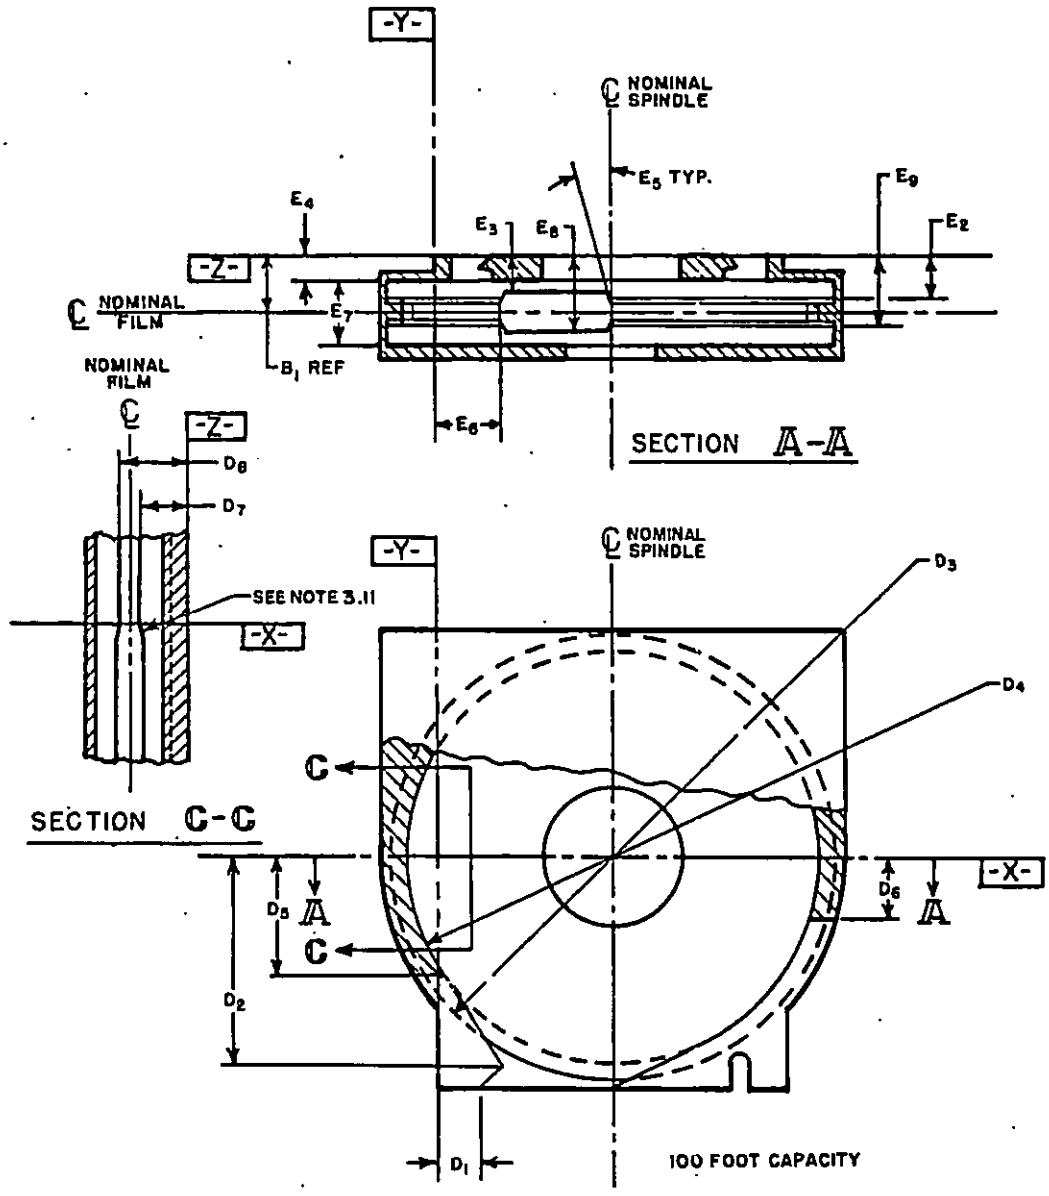

NOTE: SEE TABLE II FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 2

Cassette Model B INTERNAL DIMENSIONS

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 10 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

TABLE III

	INCHES		MILLIMETERS	
F_1	0.366 MIN	0.386 MAX	9.30 MIN	9.80 MAX
F_2	1.215 MAX		30.85 MAX	
F_3	1.594 MIN	1.636 MAX	40.50 MIN	41.55 MAX
F_4	1.535 MIN RADIUS		39.00 MIN RADIUS	
F_5	1.360 MIN	1.380 MAX RADIUS	34.55 MIN	35.05 MAX RADIUS
F_6	0.549 MAX		13.95 MAX	
F_7	1.120 MAX		28.45 MAX	
F_8	3.407 MIN	3.427 MAX	86.55 MIN	87.05 MAX
F_9	0.400 MAX		10.15 MAX	
F_{10}	45° ± 2°		45° ± 2°	
F_{11}	1.615 MAX		41.00 MAX	
F_{12}	0.018 MAX		0.45 MAX*	
F_{13}	1.703 MIN	1.736 MAX	43.25 MIN	44.10 MAX
F_{14}***	0.594 MIN	0.622 MAX	15.10 MIN	15.80 MAX
F_{15}***	0.396 MIN	0.410 MAX	10.05 MIN*	10.40 MAX*
G_1	0.937 MIN	0.957 MAX	23.80 MIN*	24.30 MAX*
G_2	1.807 MIN	1.827 MAX	45.90 MIN	46.40 MAX
G_3	VALUE OMITTED.			
G_4	0.224 MAX		5.70 MAX	
G_5	0.374 MIN	0.390 MAX	9.50 MIN	9.90 MAX
G_6	0.309 MIN	0.325 MAX	7.85 MIN	8.25 MAX
G_7	15° ± 2°		15° ± 2°	
G_8	0.571 MIN		14.50 MIN	
G_9	0.620 MIN	0.642 MAX	15.75 MIN	16.30 MAX
G_{10}	0.683 MIN	0.707 MAX	17.35 MIN	17.95 MAX

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

*** APPLIES TO AREA ABOVE DATUM PLANE X ONLY.

APPROVED 1 APR 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Distribution for all new engineering and design applications and for repairing end items to be made from this document.

P.A. NAVY - AS Other Cust: ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 11 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23003

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

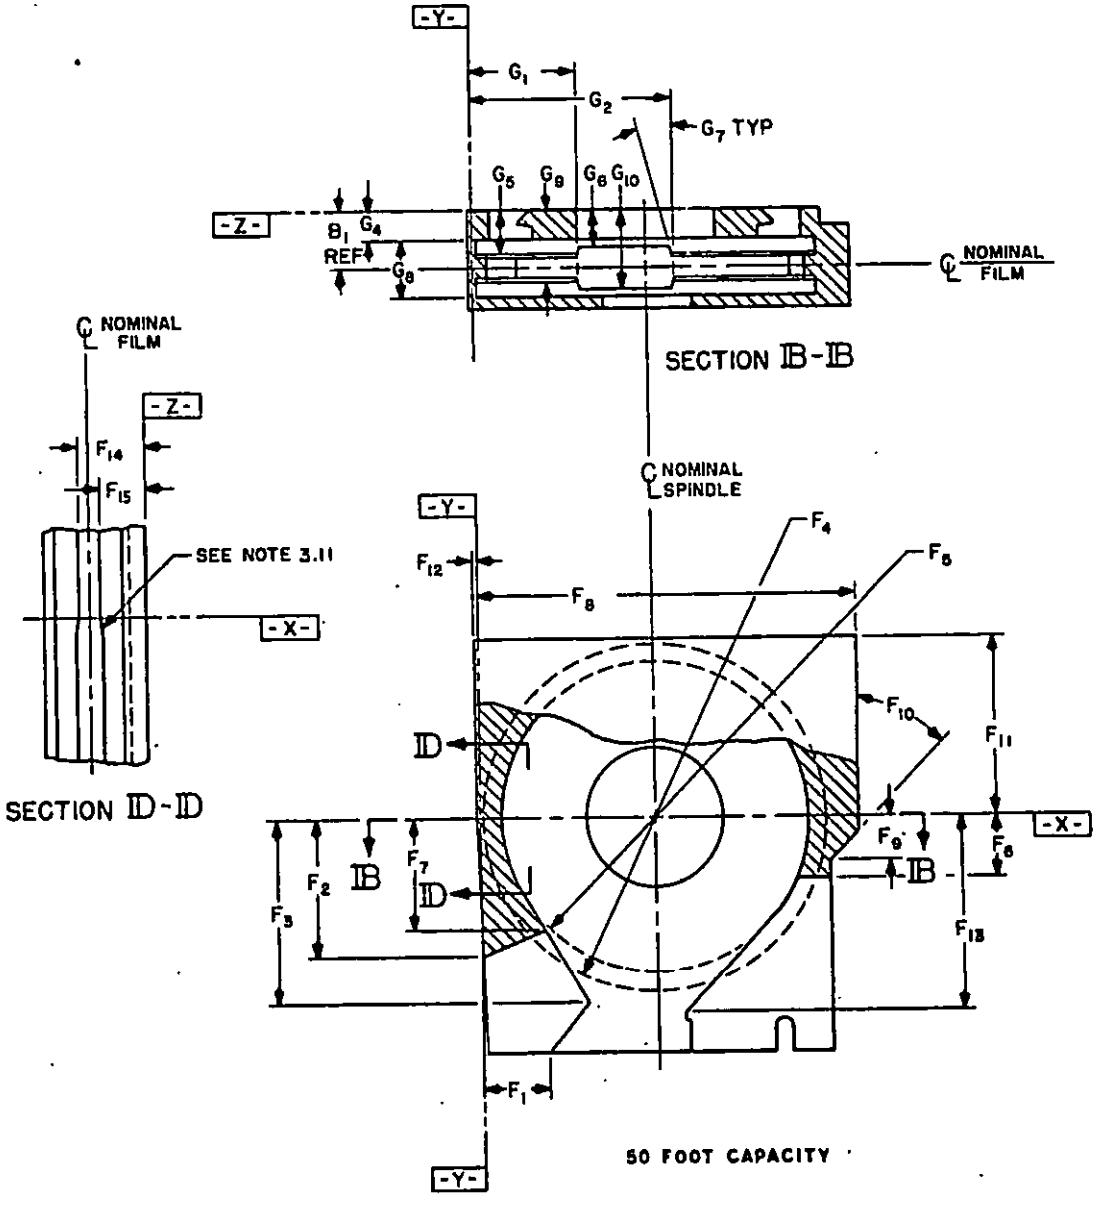

NOTE: SEE TABLE III FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 3

Cassette Model A INTERNAL DIMENSIONS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: USER SYMBOLS:

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 12 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft correction should be based on the information in the current DODISS."

TABLE IV

	INCHES		MILLIMETERS	
H_1	2.100 MAX		53.35 MAX	
H_2	0.124 MIN	0.187 MAX RADIUS	3.15 MIN	4.75 MAX RADIUS
H_3	0.010 MAX RADIUS		0.25 MAX RADIUS	
H_4	2.095 MAX RADIUS		53.20 MAX RADIUS	
H_5	0.394 MIN RADIUS		10.00 MIN RADIUS	
H_6	0.640 MIN RADIUS		16.25 MIN RADIUS	
H_7	0.809 MAX RADIUS		20.55 MAX RADIUS	
J_1	0.910 MIN REF	0.941 MAX REF	23.10 MIN REF	23.90 MAX REF
J_2	0.124 MIN	0.171 MAX	3.15 MIN	4.35 MAX

TABLE V

	INCHES		MILLIMETERS	
K_1	1.972 MIN	1.988 MAX	50.10 MIN	50.50 MAX
K_2	1.872 MIN	1.888 MAX	47.55 MIN	47.95 MAX
K_3	2.167 MIN	2.181 MAX	55.05 MIN	55.40 MAX
K_4	2.316 MIN	3.331 MAX	58.85 MIN	59.20 MAX
K_5	2.463 MIN	2.480 MAX	62.55 MIN*	63.00 MAX*
K_6	2.957 MIN	2.970 MAX	75.10 MIN	75.45 MAX

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.
NAVY - AS
Other Cust
ARMY - EL
AIR FORCE - 70

TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm

MILITARY STANDARD
MS14115


PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 13 OF 27

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

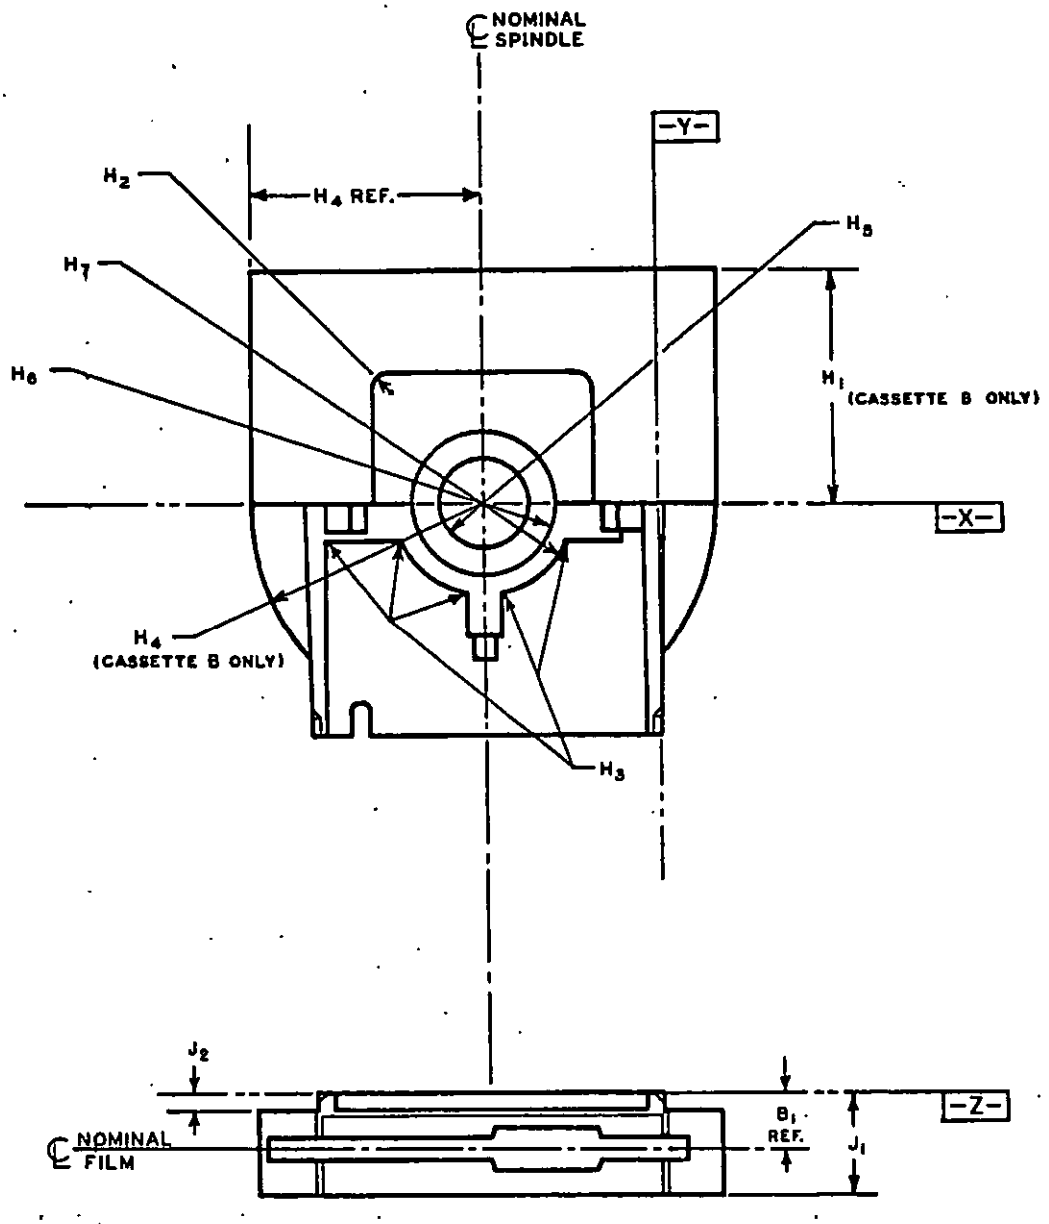

NOTE: SEE TABLE IV FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 4

EXTERNAL DIMENSIONS for Cassette Models A & B

APPROVED 1 APR 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 14 OF 27


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17309

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

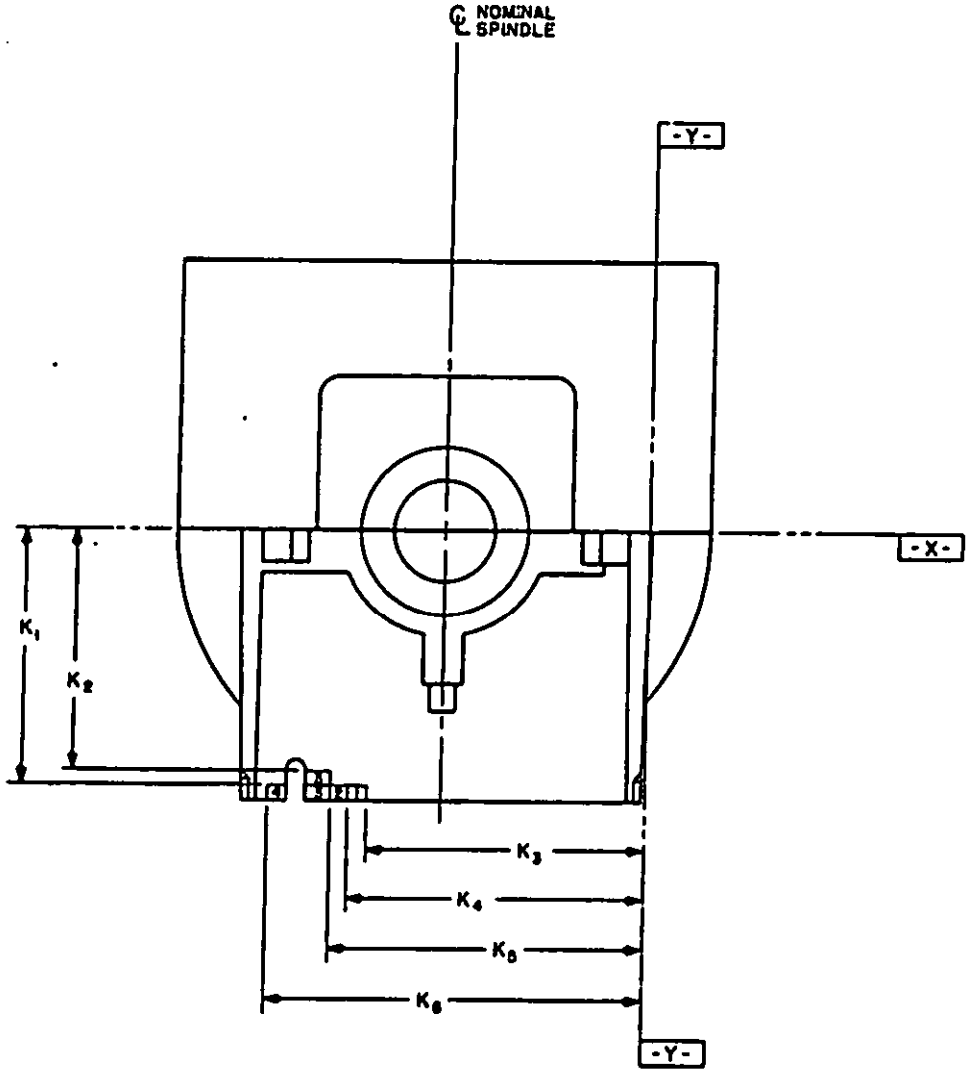

NOTE: SEE TABLE V FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 5

IDENTIFICATION NOTCHES for Cassette Models A & B

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 15 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17309

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft directive should be based on the information in the current DODISS."

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DOD135."

TABLE VI

	INCHES		MILLIMETERS	
L_1	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
L_2	1.303 MIN	1.315 MAX	33.10 MIN	33.40 MAX
L_3	1.512 MIN	1.528 MAX	38.40 MIN	38.80 MAX
L_4	0.248 MIN	0.252 MAX	6.30 MIN	6.40 MAX
L_5	0.128 MIN	0.132 MAX	3.25 MIN	3.35 MAX
L_6	0.362 MIN	0.401 MAX	9.20 MIN	10.20 MAX
L_7	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
L_8	1.143 MIN	1.163 MAX	29.05 MIN	29.55 MAX
L_9	0.150 MIN	0.161 MAX	3.80 MIN	4.10 MAX
L_{10}	1.169 MIN	1.173 MAX	29.70 MIN	29.80 MAX
L_{11}	3.378 MIN	3.398 MAX	85.80 MIN	86.30 MAX
L_{12}	2.992 MIN	3.000 MAX	76.00 MIN	76.20 MAX
L_{13}	0.150 MIN	0.161 MAX	3.80 MIN	4.10 MAX
L_{14}	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
L_{15}	2.461 MIN	2.480 MAX	62.50 MIN	63.00 MAX
L_{16}	0.004 MIN	0.012 MAX	0.10 MIN	0.30 MAX
L_{17}	0.002 MIN	0.008 MAX	0.05 MIN	0.20 MAX
L_{18}	0.146 MIN	0.155 MAX	3.70 MIN	3.95 MAX
L_{19}	45° ± 1°		45° ± 1°	
L_{20}	10° ± 1°		10° ± 1°	
L_{21}	0.965 MIN	0.984 MAX	24.50 MIN	25.00 MAX
L_{22}	0.065 MIN	0.075 MAX	1.65 MIN	1.90 MAX
L_{23}	3.199 MIN	3.217 MAX	81.25 MIN	81.70 MAX

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.
NAVY - AS
Other Cust
ARMY - EL
AIR FORCE - 70

TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm

MILITARY STANDARD
MS14115

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 16 OF 27


DD FORM 1 MAR 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23088


Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

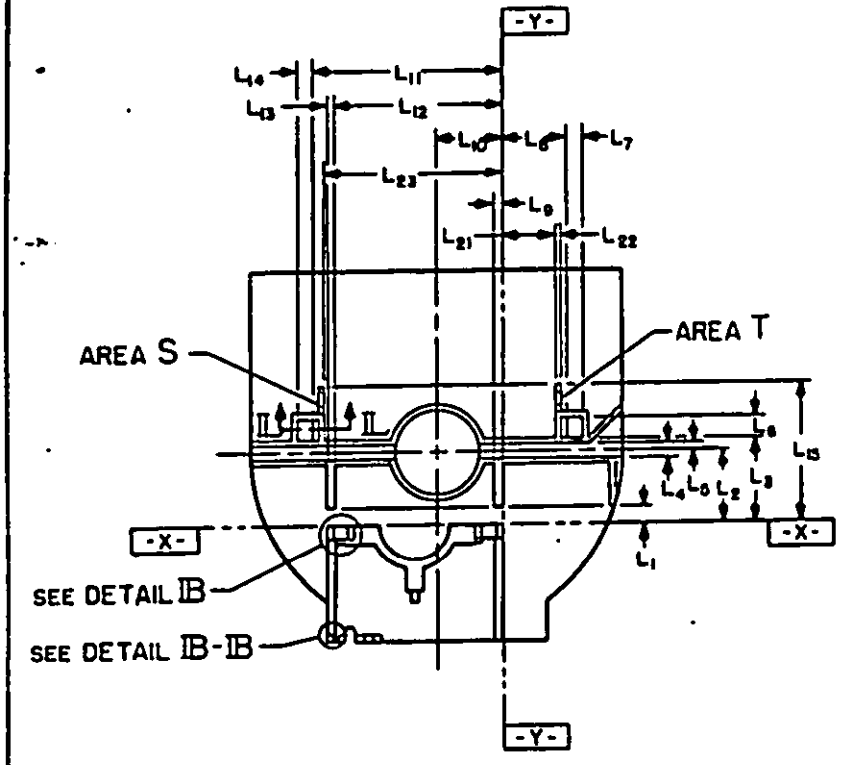

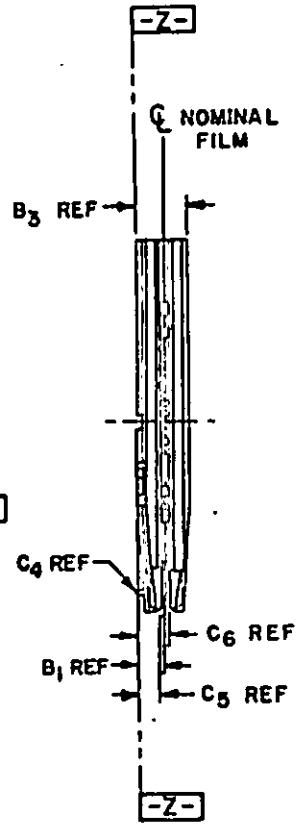

FOR MOUNTING DIMENSIONS BELOW -X- DATUM, SEE FIGURE 1, CASSETTES A and B



SECTION L-L

NOTE: SEE TABLES I AND VI FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 6

MOUNTING, LATCHING, & DATUM DIMENSIONS

Cassette Model C

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES, and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 17 OF 27

DD FORM 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

PLATE

REVIEWER SYMBOLS

USER SYMBOLS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft changes should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft standard should be based on the information in the current DOD153."

TABLE VII

	INCHES		MILLIMETERS	
N_1	1.563 MIN	1.577 MAX	39.70 MIN*	40.05 MAX*
N_2	0.000 MIN	0.015 MAX	0.00 MIN	0.40 MAX
N_3	0.211 MAX		5.35 MAX	
N_4	0.606 MIN		15.40 MIN	
N_5	0.620 MIN	0.642 MAX	15.75 MIN	16.30 MAX
N_6	0.374 MIN	0.390 MAX	9.50 MIN	9.90 MAX
P_1	1.016 MIN	1.096 MAX	25.80 MIN	27.85 MAX
P_2	2.890 MIN RADIUS		73.40 MIN RADIUS	
P_3	3.220 MIN RADIUS		81.80 MIN RADIUS	
P_4	0.321 MIN	0.341 MAX	8.15 MIN	8.65 MAX

TABLE VIII

	INCHES		MILLIMETERS	
Q_1	0.394 MIN RADIUS		10.00 MIN RADIUS	
Q_2	0.780 MIN	0.811 MAX	19.80 MIN	20.60 MAX
Q_3	3.299 MIN	3.331 MAX RADIUS	83.80 MIN	84.60 MAX RADIUS
Q_4	4.646 MAX		118.00 MAX	
Q_5	0.740 MIN RADIUS		18.80 MIN RADIUS	
Q_6	2.120 MIN	2.165 MAX	53.85 MIN	55.00 MAX
Q_7	4.437 MIN	4.539 MAX	112.70 MIN	115.30 MAX

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm.	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 18 OF 27


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23083

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

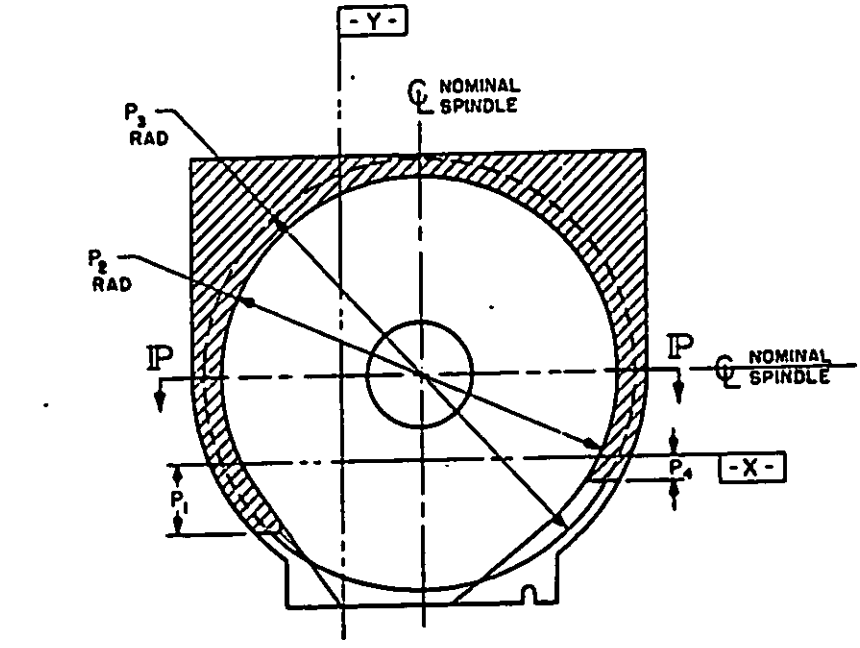

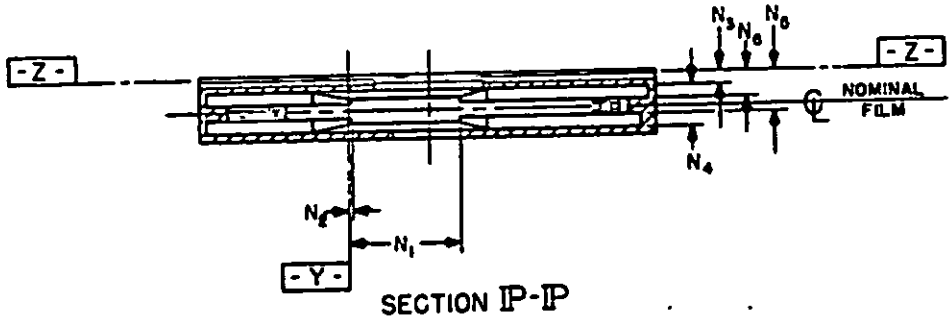

SECTION IP-IP

NOTE: SEE TABLE VII FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 7

Cassette Model C INTERNAL DIMENSIONS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft activities should be based on the information in the current DODISS."

USER SYMBOLS

REVIEWER SYMBOLS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1 APR 1974 REVISED

P.A.
NAVY - AS
Other Cust
ARMY EL
AIR FORCE 70

PROCUREMENT SPECIFICATION
NONE

TITLE
CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm

SUPERSEDES:

MILITARY STANDARD
MS 14115


SHEET 19 OF 27

PLATE NO. 17109

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
*Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for bid and engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6760

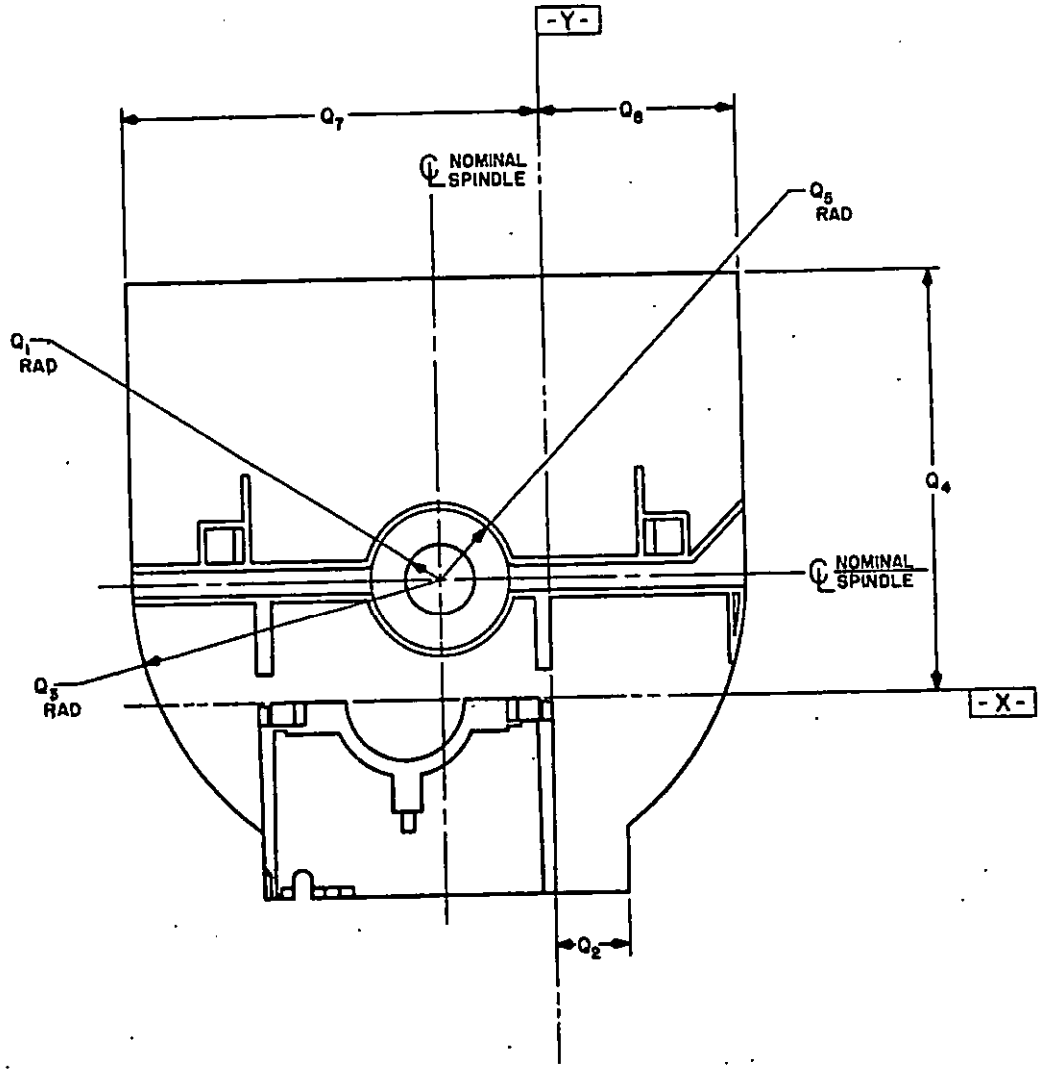

NOTE: SEE TABLE VIII FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 8

Cassette Model C EXTERNAL DIMENSIONS

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 20 OF 27

DD FORM 672-1 (Coordinated)

PLATE NO. 1770

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

TABLE IX

	INCHES		MILLIMETERS	
R_1	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
R_2	1.968 MIN	1.972 MAX	50.00 MIN	50.10 MAX
R_3	1.512 MIN	1.528 MAX	38.40 MIN	38.80 MAX
R_4	0.248 MIN	0.252 MAX	6.30 MIN	6.40 MAX
R_5	0.528 MIN	0.533 MAX	13.40 MIN	13.55 MAX
R_6	0.362 MIN	0.401 MAX	9.20 MIN	10.20 MAX
R_7	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
R_8	1.143 MIN	1.163 MAX	29.05 MIN	29.55 MAX
R_9	0.150 MIN	0.161 MAX	3.80 MIN	4.10 MAX
R_{10}	0.655 MIN	0.659 MAX	16.65 MIN	16.75 MAX
R_{11}	3.378 MIN	3.398 MAX	85.80 MIN	86.30 MAX
R_{12}	2.992 MIN	3.000 MAX	76.00 MIN	76.20 MAX
R_{13}	0.150 MIN	0.161 MAX	3.80 MIN	4.10 MAX
R_{14}	0.291 MIN	0.311 MAX	7.40 MIN	7.90 MAX
R_{15}	2.461 MIN	2.480 MAX	62.50 MIN	63.00 MAX
R_{16}	0.004 MIN	0.012 MAX	0.10 MIN	0.30 MAX
R_{17}	0.002 MIN	0.008 MAX	0.05 MIN	0.20 MAX
R_{18}	0.146 MIN	0.155 MAX	3.70 MIN	3.95 MAX
R_{19}	44° MIN	46° MAX	44° MIN	46° MAX
R_{20}	9° MIN	11° MAX	9° MIN	11° MAX
R_{21}	0.965 MIN	0.984 MAX	24.50 MIN	25.00 MAX
R_{22}	0.065 MIN	0.075 MAX	1.65 MIN	1.90 MAX
R_{23}	3.199 MIN	3.217 MAX	81.25 MIN	81.70 MAX

APPROVED 1 APR 1974 REVISED

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft changes should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 21 OF 27

DD FORM 1 MAR 77 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 33013

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 6760

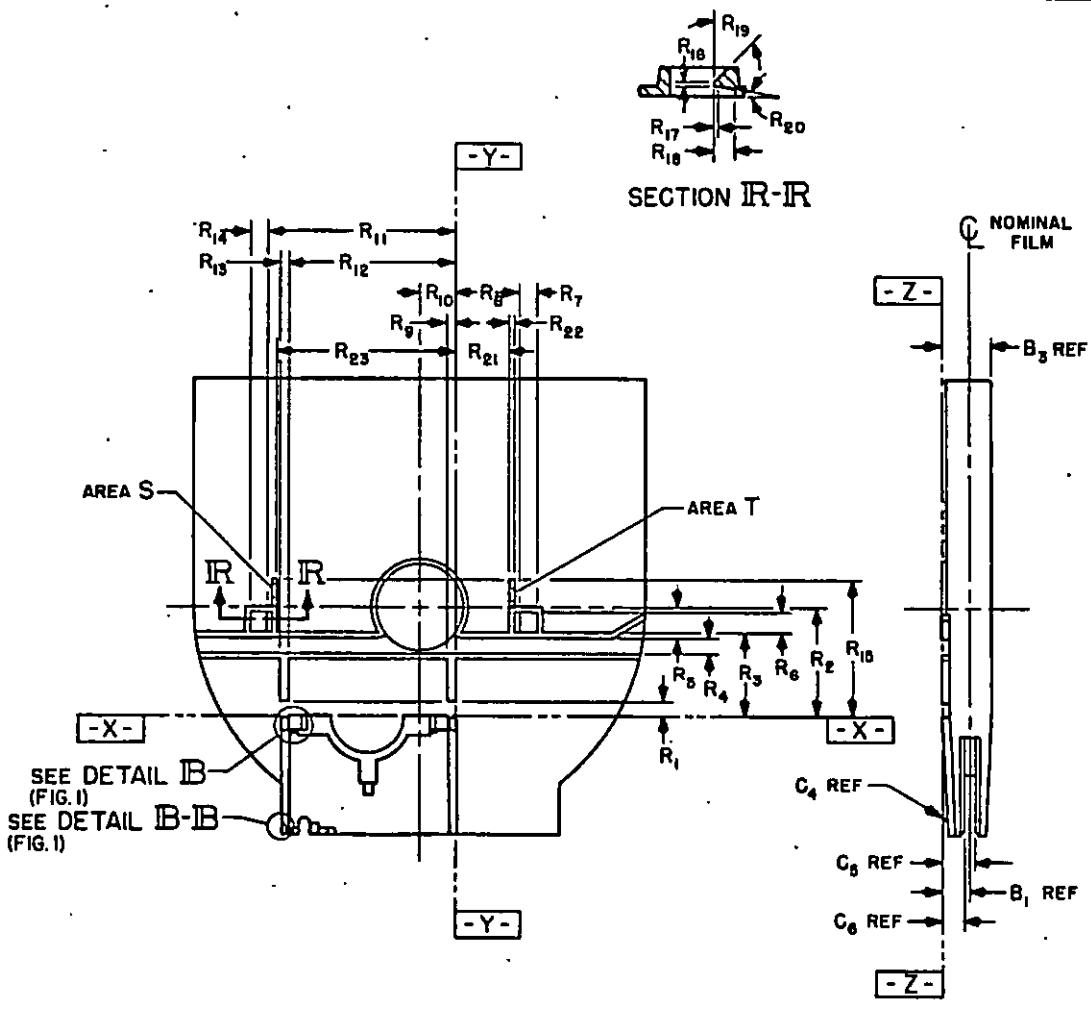

FOR MOUNTING DIMENSIONS BELOW -X- DATUM, SEE FIGURE 1, CASSETTES A and B

NOTE: SEE TABLES I AND IX FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 9

MOUNTING, LATCHING, & DATUM DIMENSIONS

Cassette Model D

APPROVED 1 MAR 1974 REVISED

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE: CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 22 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6760

TABLE X

	INCHES		MILLIMETERS	
T_1	1.542 MIN	1.563 MAX	39.15 MIN	39.70 MAX
T_2	0.209 MIN	0.228 MAX	5.30 MIN	5.80 MAX
T_3	0.211 MAX		5.35 MIN	
T_4	0.606 MIN		15.40 MIN	
T_5	0.620 MIN	0.642 MAX	15.75 MIN	16.30 MAX
T_6	0.374 MIN	0.390 MAX	9.50 MIN	9.90 MAX
U_1	1.016 MIN	1.096 MAX	25.80 MIN	27.85 MAX
U_2	3.626 MIN RADIUS		92.10 MIN RADIUS	
U_3	3.957 MIN RADIUS		100.50 MIN RADIUS	
U_4	0.321 MIN	0.341 MAX	8.15 MIN	8.65 MAX

TABLE XI

	INCHES		MILLIMETERS	
V_1	0.394 MIN RADIUS		10.00 MIN RADIUS	
V_2	1.815 MIN	1.835 MAX	46.10 MIN	46.60 MAX
V_3	4.035 MIN	4.065 MAX	102.50 MIN	103.25 MAX
V_4	6.037 MAX		153.35 MAX*	
V_5	0.740 MIN RADIUS		18.80 MIN RADIUS	
V_6	3.410 MAX		86.60 MAX	
V_7	4.720 MAX		119.90 MAX	

TABLE XII

REEL SIZE NUMBER	NOMINAL CAPACITY OF REEL	DIMENSION	INCHES MAX	INCHES MIN	MILLIMETERS MAX	MILLIMETERS MIN
15	220-FOOT (MODEL C)	H	6.150	6.130	156.20	155.70
		V	6.181		157.00	
		FILM DIA**	5.60	3.70	142.2	94.0
19	400-FOOT (MODEL D)	H	7.625	7.594	193.65	192.90
		V	7.653		194.40	
		FILM DIA**	7.07	4.90	179.6	124.5

* TO FACILITATE COMPATIBLE ISO DOCUMENTS, CONVERSION VALUE ESTABLISHED AS IF MILLIMETERS WERE PRIMARY.

** SEE 4.10.1

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Cust: ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 23 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 27053


USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft correction should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

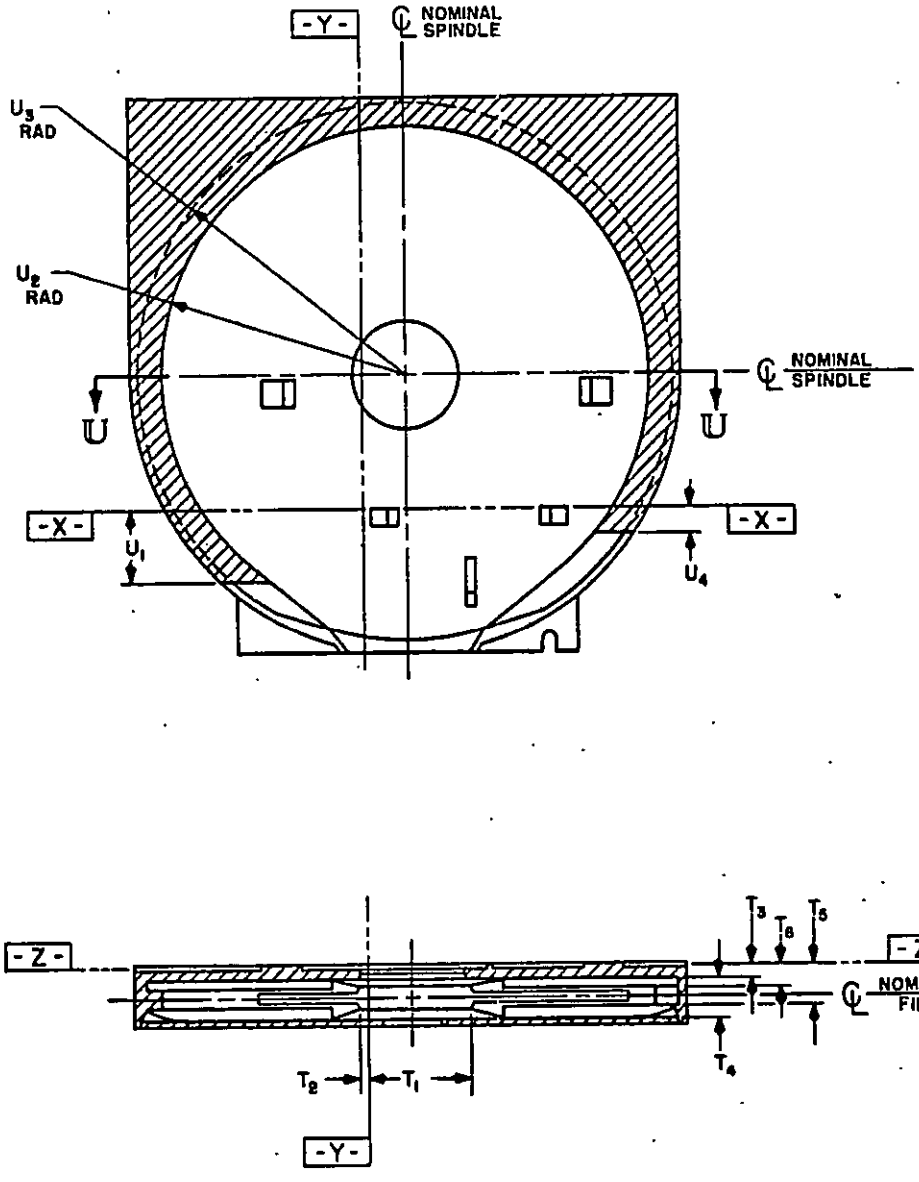

SECTION U-U

NOTE: SEE TABLE X FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 10

Cassette Model D INTERNAL DIMENSIONS

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. NAVY - AS Other Govt ARMY EL AIR FORCE 70	TITLE CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 24 OF 27

DD FORM 1 MAR 79 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

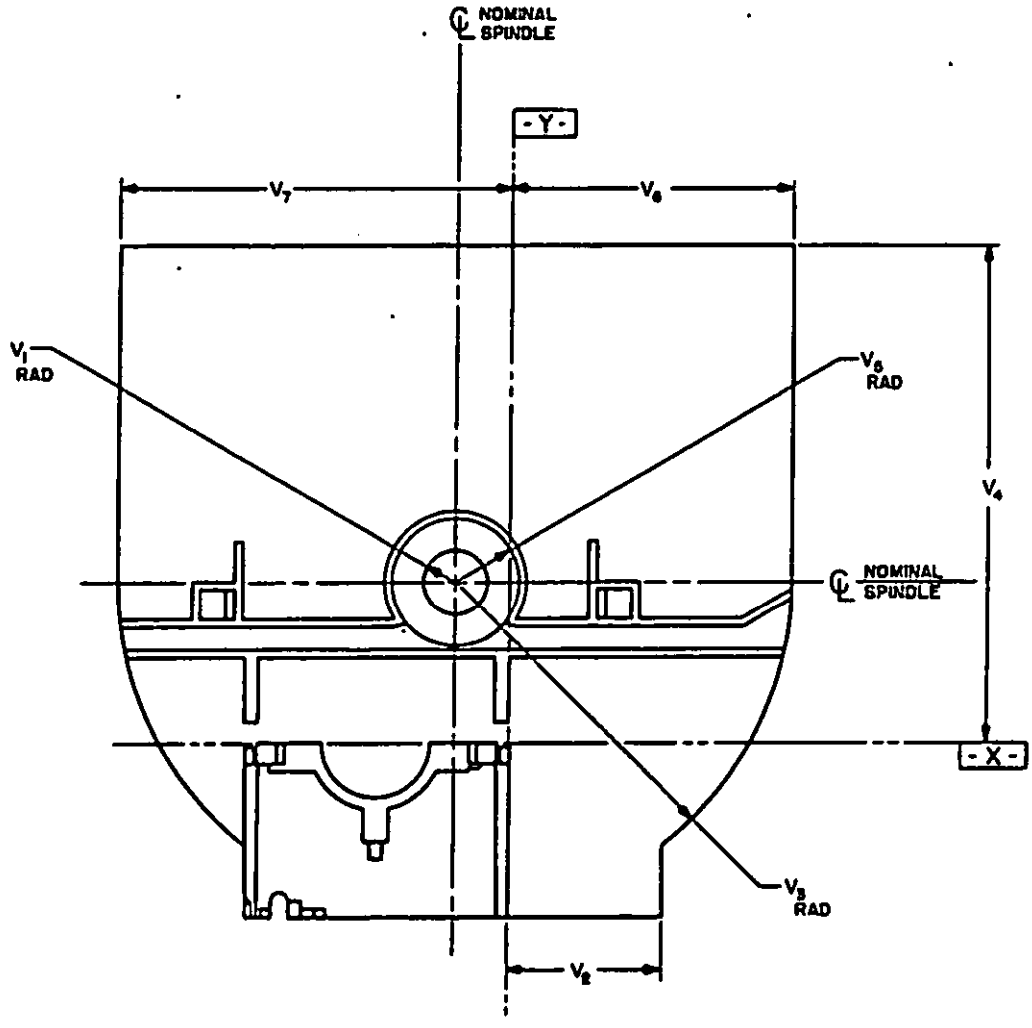

NOTE: SEE TABLE XI FOR SPECIFIC MAXIMUM AND MINIMUM DIMENSIONS.

Fig. 11

Cassette Model D EXTERNAL DIMENSIONS

APPROVED 1 APR 1974 REVISED

P.A. NAVY - AS Other Ctrs ARMY EL AIR FORCE 70	TITLE CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 25 OF 27

DD FORM 1426 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.


REVIEWER SYMBOLS: USER SYMBOLS:


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6760

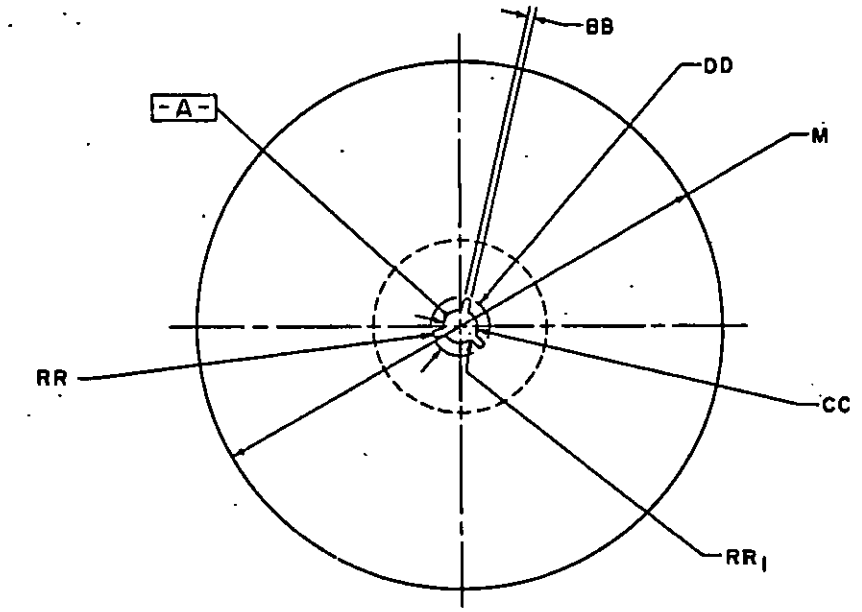

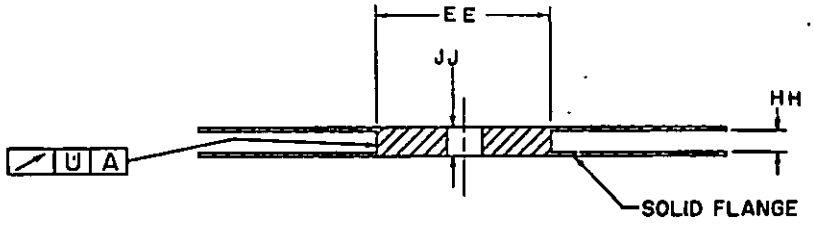

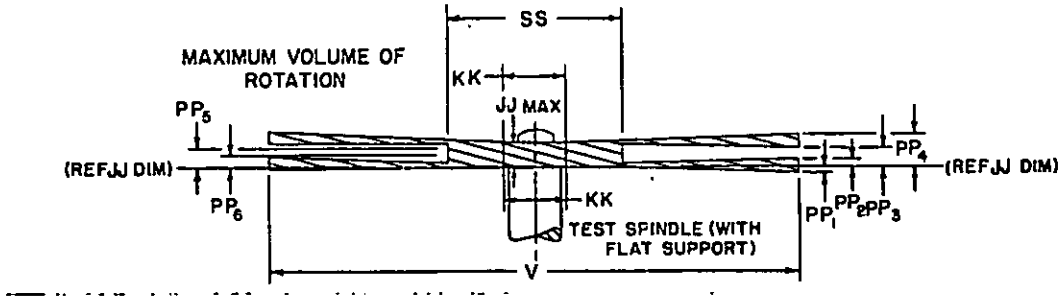

NOTE: SEE TABLES XII AND XIII FOR SPECIFIC MINIMUM AND MAXIMUM DIMENSIONS

Fig. 12

REEL DIMENSIONS for Cassette Models C and D

P.A. NAVY - AS Other Cust ARMY EL AIR FORCE 70	TITLE CASSETTES and REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS 14115
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 26 OF 27

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

USER SYMBOLS
REVIEWER SYMBOLS
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

TABLE XIII

DIMENSIONS	INCHES MAX	INCHES MIN	MILLIMETERS MAX	MILLIMETERS MIN
BB	0.071	0.059	1.80	1.50
CC	0.508	0.502	13.00	12.75
DD	0.822	0.802	20.90	20.40
EE	2.500	2.470	63.50	62.75
HH	0.370	0.321	9.40	8.15
JJ	0.450	0.421	11.45	10.70
KK	0.850	-	21.60	-
PP_1	0.016	-	0.40	-
PP_2	0.055	-	1.40	-
PP_3	-	0.374	-	9.50
PP_4	0.445	-	11.30	-
PP_5	0.370	-	9.40	-
PP_6	-	0.059	-	1.50
RR	MAXIMUM IS ONE-HALF THE VALUE OF BB		MAXIMUM IS ONE-HALF THE VALUE OF BB	
RR_1	MAXIMUM IS ONE-HALF THE VALUE OF BB		MAXIMUM IS ONE-HALF THE VALUE OF BB	
SS	2.530	-	64.25	-
U	0.031	-	0.80	-

APPROVED 1 APR 1974 REVISED

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 70	TITLE: CASSETTES AND REELS, PROJECTION MOTION-PICTURE, SUPER 8mm	MILITARY STANDARD MS14115
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 27 OF 27

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MS14115 CASSETTES AND REELS, PROJECTION, MOTION-PICTURE, SUPER 8mm

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316



Engineering Specifications and Standards Department (Code ES)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:34Z
Check the source to verify that this is the current version before use.