INCH-POUND
A-A-51159B
25 September 2000
SUPERSEDING
A-A-51159A
10 November 1993

COMMERCIAL ITEM DESCRIPTION

CRIMPING AND BEADING MACHINES, SHEET METAL, MANUALLY OPERATED, ROTARY TYPE, DEEP THROAT STYLE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for manually operated, sheet metal, rotary type, deep throat style crimping and beading machines to be used in sheet metal and other metalworking shops.

2. CLASSIFICATION. The crimping and beading machine shall be of a single type, and unless specified otherwise in the acquisition order (see 7.4(b)), shall be one of the following sizes:

2.1 Size. See table I.

TABLE I. Sizes and capacities.

Size Code	Capacity mild steel, (gauge)	Distance between shaft centers, inches (min.)	Distance, center of rolls to gauge, inches (min.)
24	24	1-1/4	5-3/4
22	22	1-1/2	5-3/4
20	20	1-1/2	5-3/4
18	18	2	12-3/4

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3441

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design. The machine furnished shall be new and of the manufacturer's current production models capable of performing crimping, beading, or crimping and beading operations. The type of rolls being used determines the product's function. When fitted with crimping rolls, the machine shall perform crimping operations. When fitted with beading rolls, the machine shall perform beading operations. When fitted with crimping and beading rolls, the machine shall perform crimping and beading operations. The machine shall include all components, parts, and features necessary to meet the above operations.

3.2 Frame. The frame shall be capable of withstanding all forces encountered during operation of the machine to its maximum capacity without any temporary or permanent distortion.

3.3 Mounting. The machine shall be furnished with provisions for bench mounting. This may be accomplished by the use of an integral frame and stand or by providing a stand that may be clamped to a bench. If specified (see 7.4(c)), a floor stand shall be furnished.

3.4 Gears. All gears shall be cast iron or machine cut steel and shall be totally enclosed or guarded to protect the operator.

3.5 Rolls. The machine's rolls shall have a hardness of between 52 and 62 on the Rockwell "C" scale when tested in accordance with the American Society for Testing and Materials (ASTM) Standard E 18, "Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials" (DoD adopted). Unless specified otherwise (see 7.4(d)), the following rolls shall be furnished:

a. Size 18, 20, and 22 machines
   (1) One pair of 3/8 inch single beading rolls
   (2) One pair of 3/4 inch ogee (OG) beading rolls

b. Size 24 machines
   (1) One pair of 1/4 or 5/16 inch single beading rolls
   (2) One pair 3/4 inch OG beading rolls

c. Size 18, 20, 22, and 24 machines
   (1) One pair of crimping rolls
   (2) One pair of crimping and beading rolls

3.6 Hand crank. The machine shall be furnished with a hand crank that shall be of sufficient length to allow normal and smooth operation of the machine.

3.7 Upper roll adjustment. The upper roll shall be adjustable by means of a quick acting crank screw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

3.8 Gauge. The machine shall be provided with an adjustable gauge to govern the head placement on the work piece.

3.9 Nameplate. A permanent nameplate shall be attached to the product. Unless otherwise specified in the acquisition order (see 7.4(e)), the nameplate shall display the following information:

a. Nomenclature
b. Manufacturer's name
c. Manufacturer's model designation
d. Machine type and size classification (see 2.1)
e. National stock number (if specified)
f. Contract or order number (if specified)
g. Date of manufacture (if specified)

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(f)).

7. NOTES

7.1 Sources of documents.

7.1.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

7.1.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

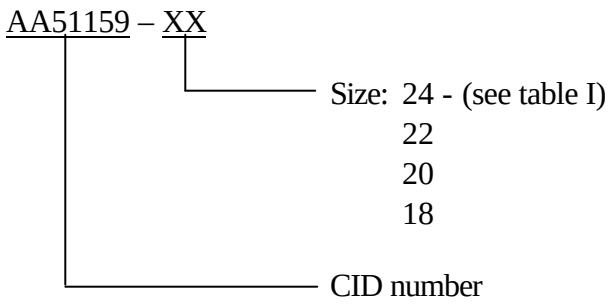

7.3 National stock number (NSN). The NSNs listed below are assigned for the listed product types and sizes (see table I). Other NSNs may also correspond with this document.

Size	Assigned NSN
18	3441-00-239-8666
18	3441-00-263-0070

7.4 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Size, if different (2.1)
c. Floor stand, if required (see 3.3)
d. Type of rolls furnished, if different (see 3.5)
e. Nameplate, if different (see 3.9)
f. Packaging requirements (see 6.1)

MILITARY INTERESTS:

Custodians:
Army - AL
Air Force - 99

Reviewer:
Air Force - 84

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 6FET

Preparing activity:
DLA - GS

(Project 3441-0189)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.