[INCH-POUND]
A-A-51165A
24 August 1998
SUPERSEDING
A-A-51165
20 March 1987

COMMERCIAL ITEM DESCRIPTION

MOISTURE STABILIZER, WELDING ELECTRODE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers portable, electrically heated, moisture stabilizers used to store and protect welding electrodes from absorbing excessive moisture.

2. CLASSIFICATION. The welding electrode moisture stabilizers shall be of the following styles and sizes. The style and size to be furnished shall be as specified (see 7.2).

Style A – Adjustable temperature control
Style B – Preset temperature control

Size 1 – 10-25 pound capacity
Size 2 – 26-50 pound capacity

3. SALIENT CHARACTERISTICS

3.1 General requirements. The moisture stabilizer shall be new and of the manufacturer's commercial design and shall be capable of holding 18-inch long flux coated electric arc welding electrodes. Style A moisture stabilizers shall be capable of adjusting the temperature from 100 °F to 300 °F. Style B moisture stabilizers shall maintain a fixed temperature of not less than 275 °F.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3439

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

3.2 Container. The container shall be double-wall construction insulated with not less than 1 inch of fiberglass or equivalent insulation and shall have a lid and a handle(s) for carrying. When specified (see 7.2), the size 2 stabilizer shall be provided with dividers to divide the container into 4 equally sized compartments.

3.3 Electrical requirements. Unless otherwise specified (see 7.2), the stabilizer shall operate from a 120 Volts ac (Vac), single phase, 60 hertz (Hz) circuit.

3.3.1 Power cord. The power cord shall have a heavy duty, 3-conductor cable conforming to Underwriter's Laboratory (UL) 62 and shall be not less than 8 feet in length. The plug shall conform to figure 5-15 of National Electrical Manufacturers Association (NEMA) WD 6.

3.4 Heating element. The electric heating element shall conform to UL 499.

3.4.1 Thermostat. The thermostat shall conform to UL 873.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency (EPA) restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified (7.2).

7. NOTES

7.1 Source of documents.

7.1.1 Government documents. Copies of Federal documents may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.
7.1.2 Non-government documents. Copies of industry (voluntary) standards referenced in this CID may be obtained from the following addresses:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Underwriters Laboratories Inc. (UL) documents may be obtained from Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.

National Fire Protection Association (NFPA) documents may be obtained from the National Fire Protection Association, One Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

National Electrical Manufacturers Association (NEMA) documents may be obtained from the National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Style and size of moisture stabilizer required (see 2.1).
c. Compartment dividers, if required (see 3.2).
d. Electrical requirements, if different (see 3.3).
e. Packaging, if different (see 6).

7.3 Part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Example of a PIN for A-A-51165A

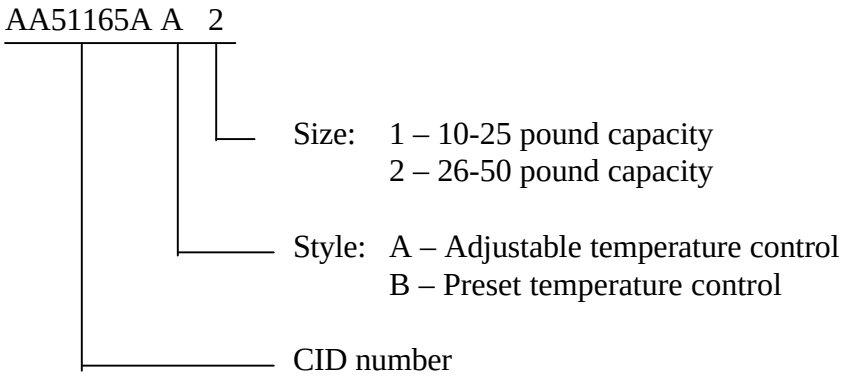

MILITARY INTERESTS:

Custodians
Army - AL
Air Force - 99

Reviewers
Air Force - 84
Navy - SH
Army - AL

PREPARING ACTIVITY:
DLA - GS

(Project 3439-0879)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.