INCH-POUND

MIL-DTL-32610/1
w/AMENDMENT 1
07 July 2021
SUPERSEDING
MIL-DTL-32610/1
24 October 2018

DETAIL SPECIFICATION SHEET

STRIPPER, MULTI-CONDUCTOR ELECTRICAL CABLE, (FOR CONDUCTOR DIAMETERS 0.090 THROUGH 0.180 INCH)

This specification is approved for use by the Naval Air Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32610.

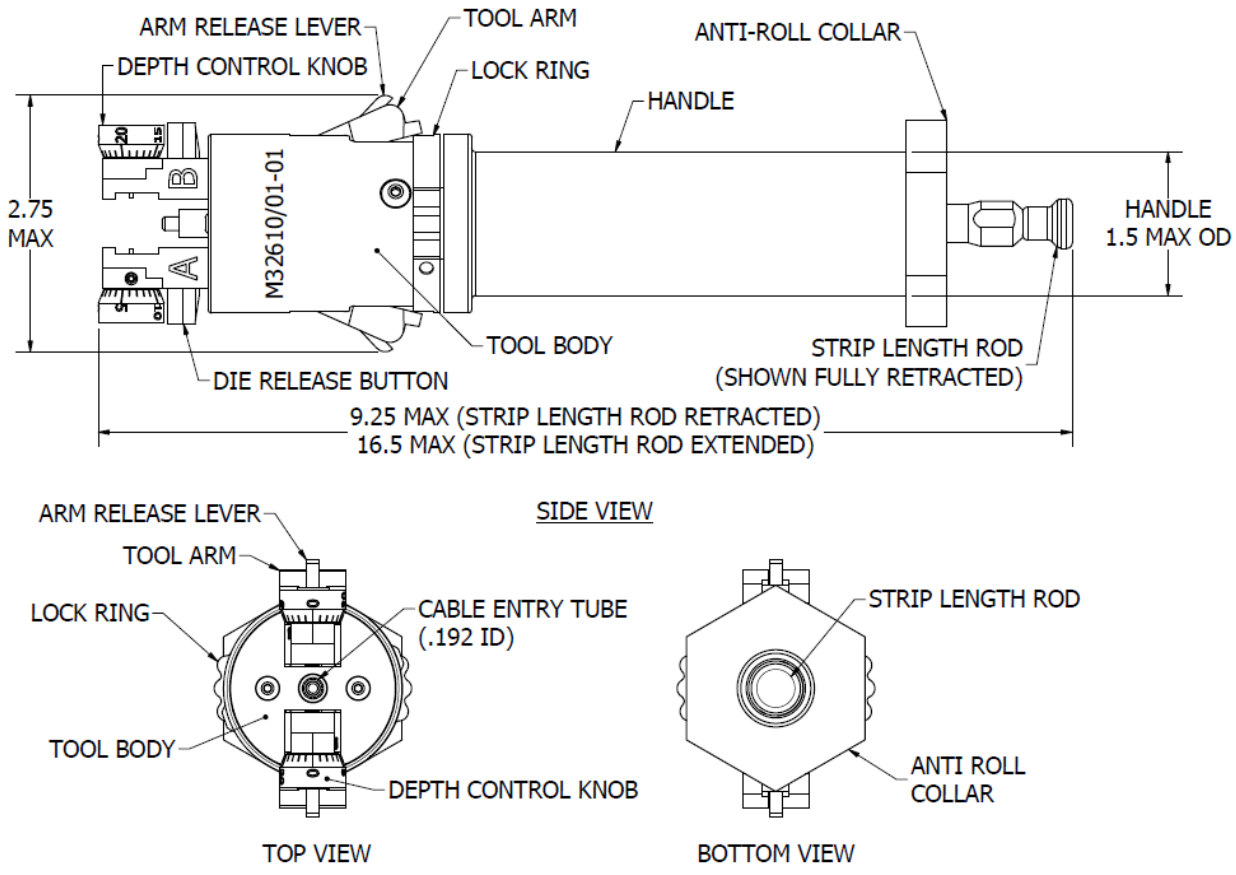


FIGURE 1. Stripper configuration (M32610/01-01).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

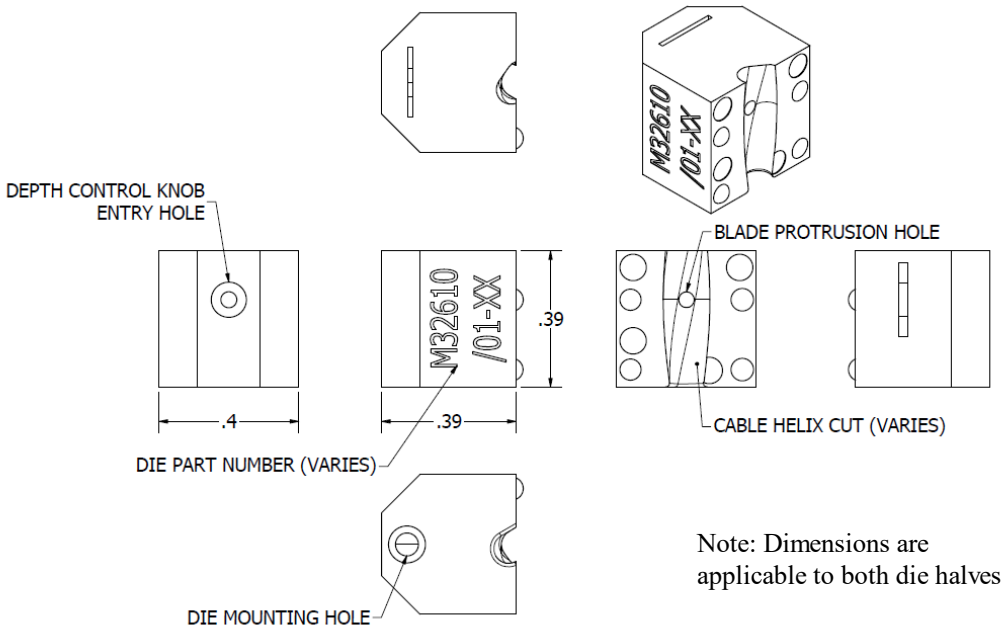


FIGURE 2. Basic stripper die configuration (M32610/01-XX).


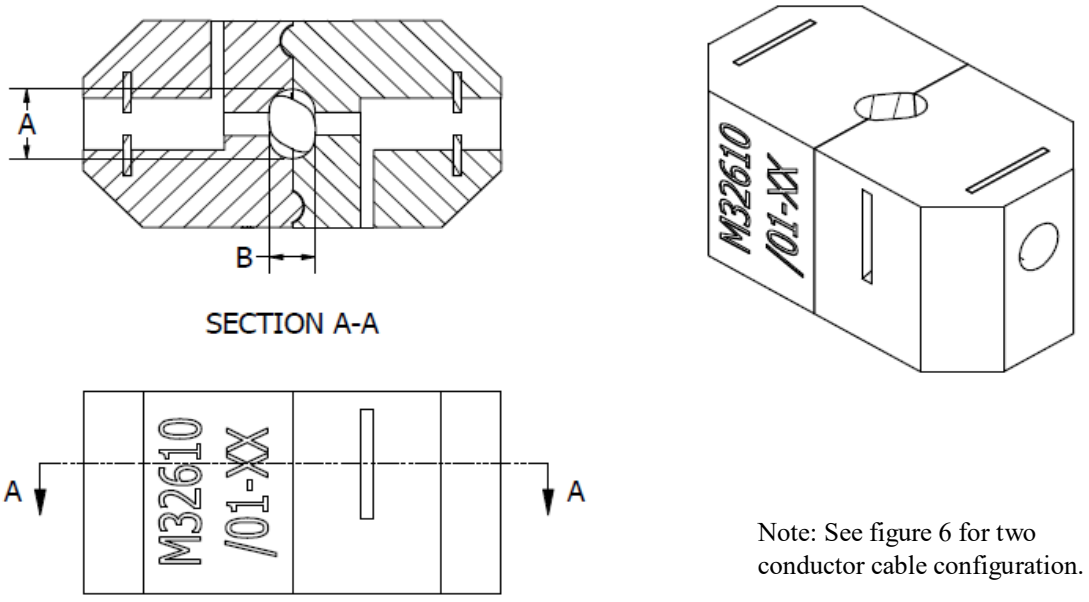


FIGURE 3. Two conductor stripper die configuration (M32610/01-XX)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE I. Two conductor die set dimensions (see figure 3).

Die set part number	DIM A (REF) (inches)	DIM B (REF) (inches)
M32610/01-03	0.090	0.058
M32610/01-04	0.100	0.065
M32610/01-05	0.110	0.071
M32610/01-06	0.120	0.078
M32610/01-07	0.130	0.084
M32610/01-08	0.140	0.091
M32610/01-09	0.150	0.097
M32610/01-10	0.160	0.104
M32610/01-11	0.170	0.110
M32610/01-12	0.180	0.117

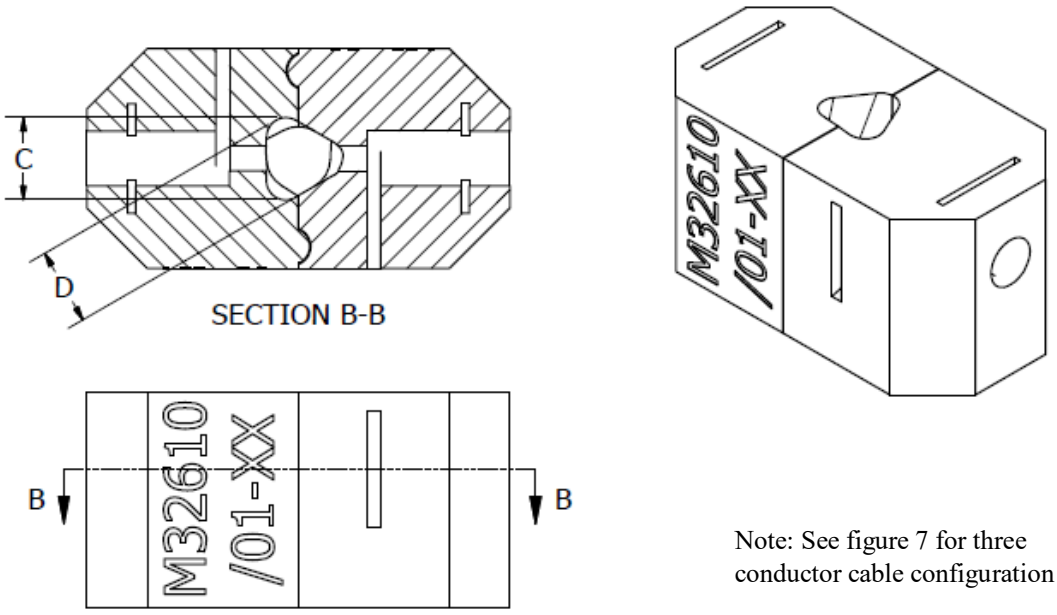

Note: See figure 7 for three conductor cable configuration

FIGURE 4. Three conductor stripper die configuration (M32610/01-XX).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE II. Three conductor die set dimensions (see figure 4).

Die set part number	DIM C (REF) (inches)	DIM D (REF) (inches)
M32610/01-13	0.090	0.083
M32610/01-14	0.100	0.093
M32610/01-15	0.110	0.102
M32610/01-16	0.120	0.111
M32610/01-17	0.130	0.121
M32610/01-18	0.140	0.130
M32610/01-19	0.150	0.139
M32610/01-20	0.160	0.149
M32610/01-21	0.170	0.158
M32610/01-22	0.180	0.168

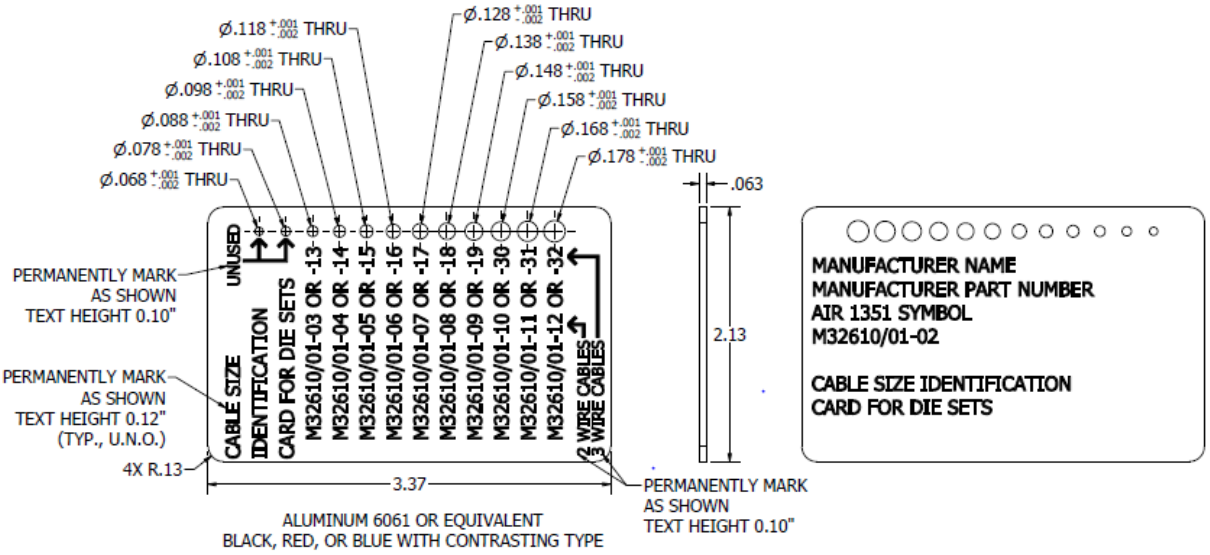


FIGURE 5. Cable ID Card (M32610/01-02).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.

2. Tolerances are as follows, unless otherwise stated:
   a. .X = +/- 0.1 in.
   b. .XX = +/- 0.03 in.
   c. .XXX = +/- 0.008 in.

REQUIREMENTS:

1. The outline configuration is optional within the maximum dimensions shown for a closed depth guide (see figure 1). The replaceable die outline configuration is optional within the maximum dimensions shown on figure 2.

2. Materials:

a. Stripper frame: The stripper tool shall be made from anodized aluminum or other material capable of meeting the performance and test requirements of MIL-DTL-32610 and this detail specification sheet.

b. Dies: The die sets shall be made from nylon. The blade and blade carrier assembly shall be made of a material capable of meeting the stripping and test requirements of MIL-DTL-32610 and this detail specification sheet.

3. Stripper and with one (1) die set installed weight: 1.5 pounds (maximum).

4. Strip length. The stripper shall include an integral strip length gauge. The gauge shall include index marking starting at 0.5 inch at increments of 0.125 inch up to a maximum of 7.5 inches. The length gauge shall be easily removable without tooling from the stripper for strips longer than the maximum gauge length.

5. Stripping force. The maximum stripping force shall not exceed 2.0 lbs. when stripping cable M27500-22SD2T23 using the M32610/01-08 die set and when blades are adjusted in accordance with the stripper user instructions.

6. Cable diameter. The minimum cable Outer Diameter (OD) that the stripper can strip is 0.070 inches. The maximum cable diameter that the stripper can strip shall be 0.180 inches (see Table III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

7. Part or Identification Number (PIN):

Example:

M 32610 /01 -01

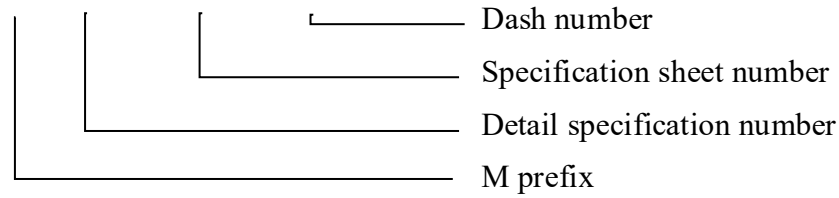


TABLE III. Die set part numbers and cable OD range (see figures 3 and 4). 1/

Die set part number M32610/01	Number of inner conductors	Cable OD range (reference) (inches)
-03	2	.081 to .090
-04	2	.091 to .100
-05	2	.101 to .110
-06	2	.111 to .120
-07	2	.121 to .130
-08	2	.131 to .140
-09	2	.141 to .150
-10	2	.151 to .160
-11	2	.161 to .170
-12	2	.171 to .180
-13	3	.081 to .090
-14	3	.091 to .100
-15	3	.101 to .110
-16	3	.111 to .120
-17	3	.121 to .130
-18	3	.131 to .140
-19	3	.141 to .150
-20	3	.151 to .160
-21	3	.161 to .170
-22	3	.171 to .180

1/ Dies listed above to be used with M32610/01-01 stripper tool frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE IV. Die set kit part numbers.

Kit part number M32610/01	Includes tool frame	Kit services cable with the number of inner conductors	Services cable OD range (inches)	The total quantity of die sets included
-23	M32610/01-01	2	.081 to .180	10
-24	M32610/01-01	3	.081 to .180	10
-25	M32610/01-01	2 and 3	.081 to .180	20

FIRST ARTICLE TEST:

1. Life (See MIL-DTL-32610, 4.6.5). The stripper shall be tested at 5,000 cycles (strip lengths of 0.5 in. min) when blades are adjusted in accordance with the stripper user instructions. The wire/cable for life testing shall be M27500-22SD2T23, the die set shall be M32610/01-08. If the M27500-22SD2T23 cable has a cable diameter that exceeds the cable OD range for the M32610/01-08 die set, the appropriate die set shall be selected using the cable ID card M32610/1-02 (see figure 5). The arms/dies shall be actuated, latched, and re-opened for each strip operation (5,000 cycles) and shall meet all stripper performance requirements (see MIL-DTL-32610, 3.8.1) after completion of the life test.

APPLICATION NOTES:

1. The stripper specified herein is designed to strip the outer jacket of oval (see figure 6) or triangular (see figure 7) cable specified in NEMA WC27500 cables with the number of conductors and cable ODs specified in table III. The stripper may be used to strip similar cables meeting the number of conductors, and cable ODs specified in table III, but the user must validate that the performance meets requirements of MIL-DTL-32610.



FIGURE 6. Two conductor cable.



FIGURE 7. Three conductor cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

2. Cable that uses PTFE (Polytetrafluoroethylene or Teflon™), or other soft material for the jacket insulation may experience inconsistent results or potentially be unsuitable for this tool. Soft insulation does not have the hardness needed for the cable to properly pull through the helix of the die set causing it to jam.

3. Overlapping tape wrapped jacket construction may make the jacket difficult to remove due to the 25 percent overlapping of jacket material at specific joints throughout the cable. It is recommended to use the stripping tool to score the cable jacket without cutting completely through the outer jacket to avoid underlying shield braid damage.

4. The "starting depth" for blade adjustment produces a very light score on the cable jacket. The operator should adjust the cutting depth to the preferred depth setting.

5. Three conductor die sets come with only one blade. The blade is in the "B" side die. This will produce a single cut longitudinally on the cable jacket. Two conductor die sets have two blades/cuts and will be removed in two segments.

6. Die sets referenced on figures 2, 3, and 4 are for left-hand lay cable.

7. In addition to MIL-DTL-32610, this document references:

NEMA WC27500 Standard for Aerospace and Industrial Electric Cable

(Copies of this document are available at the National Electrical Manufacturers Association website https://nema.org.)

8. Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
Navy - AS

(Project 5120-2021-001)

Review activities:
Army - AV
Navy - EC
Air Force - 11
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.