INCH-POUND

MIL-DTL-32610/1
24 October 2018

DETAIL SPECIFICATION SHEET

STRIPPER, CABLE, HAND, ELECTRICAL, MULTI-CONDUCTOR,
DIAMETER 0.081 TO 0.180 INCH

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32610.

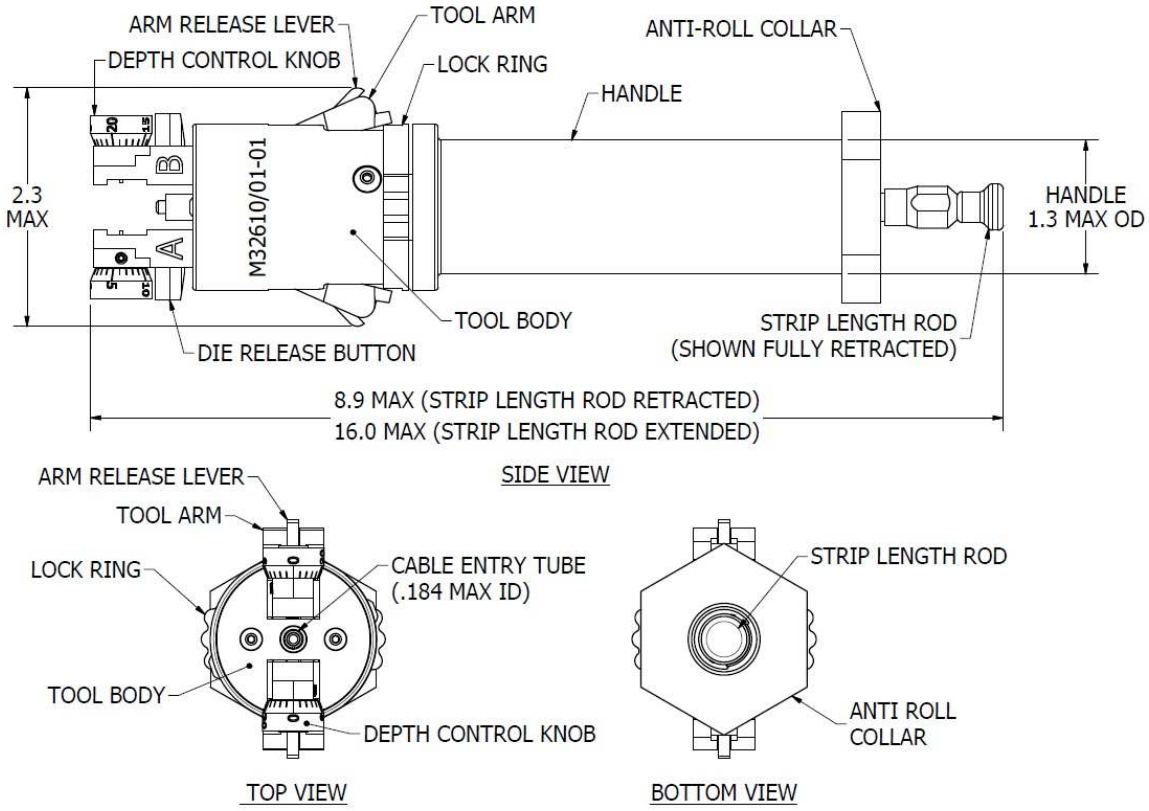


FIGURE 1. Stripper configuration (M32610/01-01).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

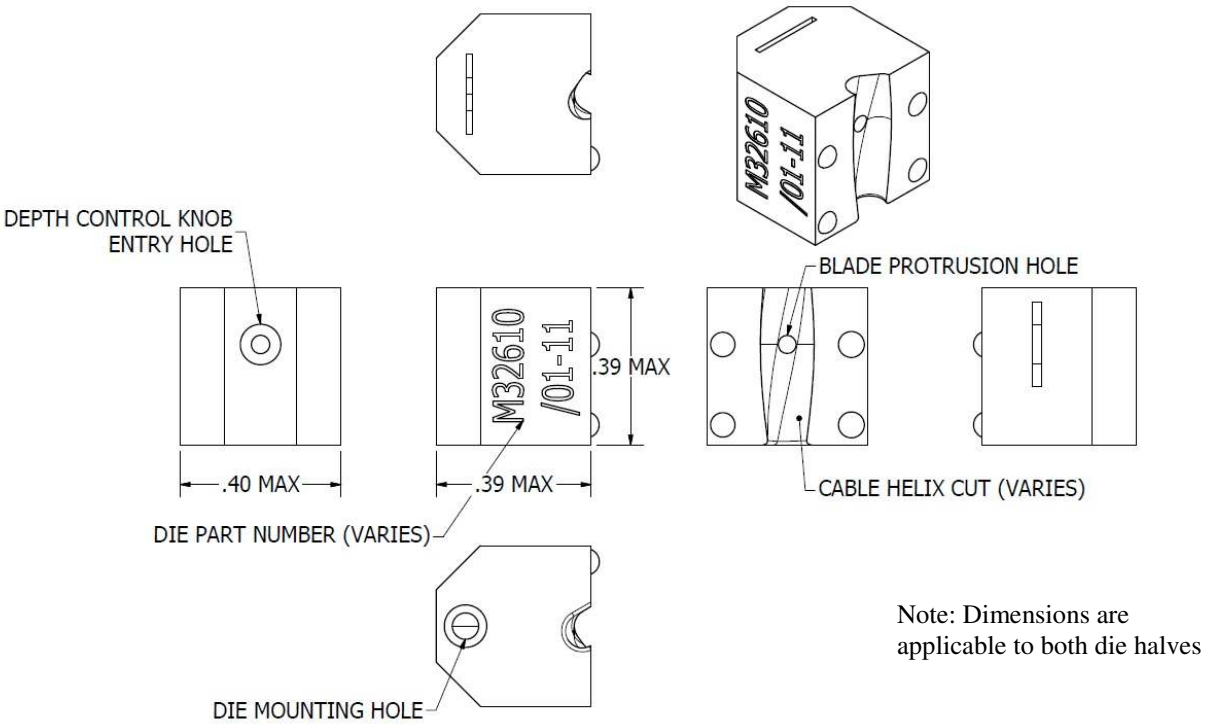


FIGURE 2. Basic stripper die configuration (M32610/01-XX).


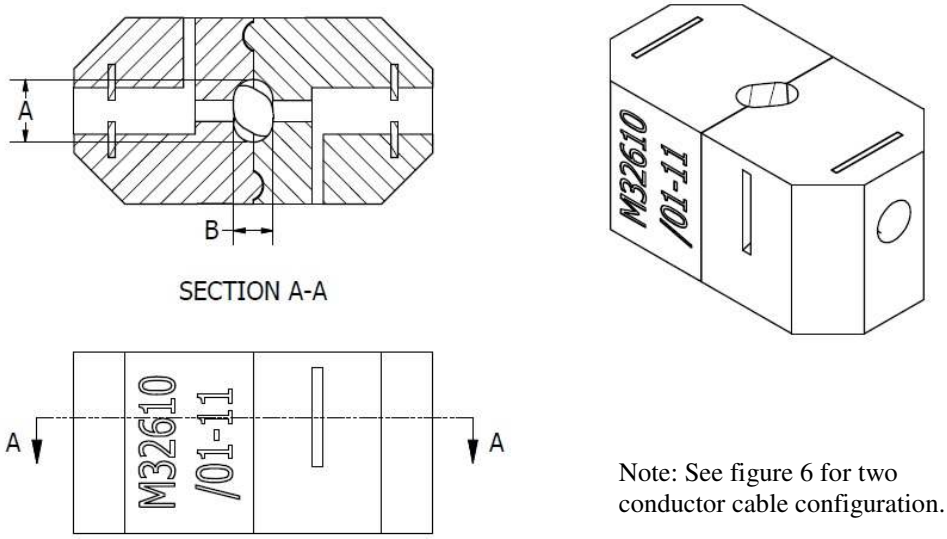


FIGURE 3. Two conductor stripper die configuration (M32610/01-XX).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE I. Two conductor die set dimensions (see figure 3).

Die set part number	A (REF) (inches)	B (REF) (inches)
M32610/01-03	0.090	0.058
M32610/01-04	0.100	0.065
M32610/01-05	0.110	0.071
M32610/01-06	0.120	0.078
M32610/01-07	0.130	0.084
M32610/01-08	0.140	0.091
M32610/01-09	0.150	0.097
M32610/01-10	0.160	0.104
M32610/01-11	0.170	0.110
M32610/01-12	0.180	0.117

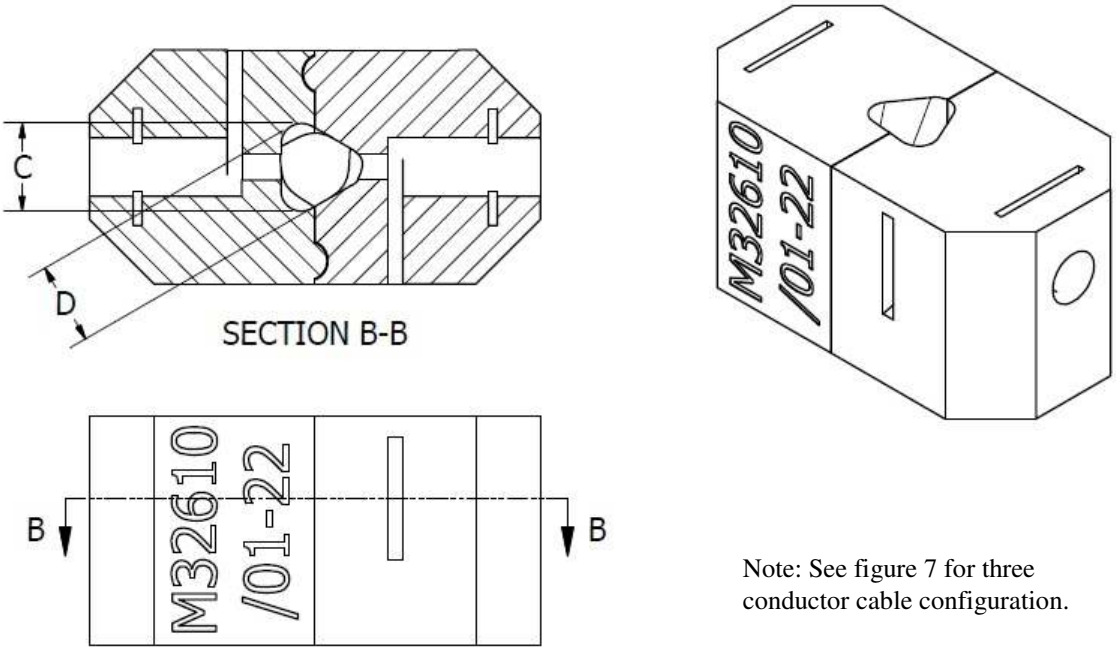

Note: See figure 7 for three conductor cable configuration.

FIGURE 4. Three conductor stripper die configuration (M32610/01-XX).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE II. Three conductor die set dimensions (see figure 4).

Die set part number	C (REF) (inches)	D (REF) (inches)
M32610/01-13	0.090	0.083
M32610/01-14	0.100	0.093
M32610/01-15	0.110	0.102
M32610/01-16	0.120	0.111
M32610/01-17	0.130	0.121
M32610/01-18	0.140	0.130
M32610/01-19	0.150	0.139
M32610/01-20	0.160	0.149
M32610/01-21	0.170	0.158
M32610/01-22	0.180	0.168

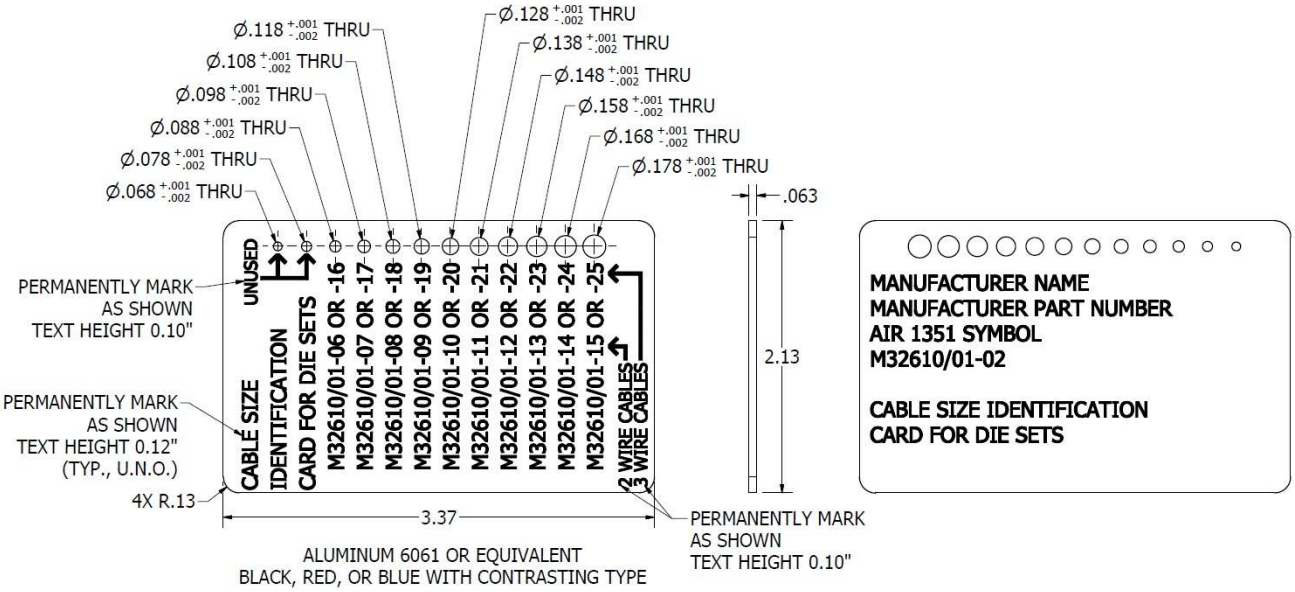


FIGURE 5. Cable ID card (M32610/01-02).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimension are in inches.

REQUIREMENTS:

1.The stripper outline configuration is optional within the maximum dimensions shown for a closed depth guide (see figure 1). The replaceable die outline configuration is optional within the maximum dimensions shown on figure 2.

2. Materials:

Stripper frame: The stripper tool shall be made from anodized aluminum or other material capable of meeting the performance and test requirements of MIL-DTL-32610 and this specification sheet.

Dies: The die sets shall be made from nylon. The blade and blade carrier assembly shall be made of material capable of meeting the stripping and test requirements of MIL-DTL-32610 and this specification sheet.


3. Stripper with one (1) die set installed weight: 0.9 pound (maximum).

4. Strip length. The stripper shall include an integral strip length gauge. The gauge shall include index marking starting at 0.5 inch at increments of 0.125 inch up to a maximum of 7.5 inches. The length gauge shall be easily removable without tooling from the stripper for strips longer than maximum gauge length.

5. Stripping force. The maximum stripping force shall not exceed 2.0 lbs. when stripping cable M27500-22SD2T23 using the M32610/01-08 die set and when blades are adjusted in accordance with the stripper user instructions.

6. Cable diameter. The minimum cable Outer Diameter(OD) that the stripper can strip is 0.070 inch. The maximum cable Outer Diameter(OD) that the stripper can strip is 0.180 inch (see table III).

7. Part or Identification Number (PIN): Example:

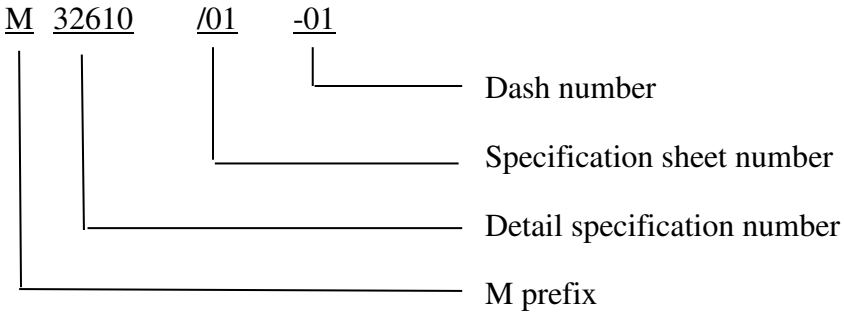

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE III. Die set part numbers and cable OD range (see figures 3 and 4). 1/

Die set part number M32610/01	Number of inner conductors	Cable OD range (reference) (inches)
-03	2	.081 to .090
-04	2	.091 to .100
-05	2	.101 to .110
-06	2	.111 to .120
-07	2	.121 to .130
-08	2	.131 to .140
-09	2	.141 to .150
-10	2	.151 to .160
-11	2	.161 to .170
-12	2	.171 to .180
-13	3	.081 to .090
-14	3	.091 to .100
-15	3	.101 to .110
-16	3	.111 to .120
-17	3	.121 to .130
-18	3	.131 to .140
-19	3	.141 to .150
-20	3	.151 to .160
-21	3	.161 to .170
-22	3	.171 to .180

1/Dies listed above to be used with M32610/01-01 stripper tool frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

TABLE IV. Die set kit part numbers.

Kit part Number M32610/1	Includes tool frame	Kit services cable with number of inner conductors	Services cable OD range (inches)	Total quantity of die sets included
-23	M32610/01-01	2	.081 to .180	10
-24	M32610/01-01	3	.081 to .180	10
-25	M32610/01-01	2 and 3	.081 to .180	20

FIRST ARTICLE TEST:

1. Life. The stripper shall be tested for 5,000 cycles (strips) with die set blades adjusted in accordance with the stripper user instructions. The wire/cable for life testing shall be M27500-22SD2T23; the die set shall be M32610/01-08. In the event that the cable M27500-22SD2T23 has a cable diameter that exceeds the cable OD range for die set M32610/1-08, the appropriate die set shall be selected using the cable ID card M32610/1-02 (see figure 5). The arms/dies shall be actuated, latched and re-opened for each strip operation (5,000 cycles), and shall meet all stripper performance requirements (see MIL-DTL-32610, 3.8.1) after completion of the life test. The blade may be adjusted every 500 cycles if jacket stripping becomes too shallow or the crack and peel jacket removal becomes difficult (see MIL-DTL-32610 Notes).

APPLICATION NOTES:

1. The stripper specified herein is designed to strip the outer jacket of oval (see figure 6) or triangular (see figure 7) cable specified in NEMA WC27500 cables with the number of conductors and cable ODs specified in table III. The stripper may be used to strip similar cables meeting the number of conductors and cable ODs specified in table III, but the user must validate the performance meets requirements of MIL-DTL-32610.



Cable MAX OD
(see Table 3)

FIGURE 6. Two conductor cable.

Cable MAX OD
(see Table 3)




FIGURE 7. Three conductor cable.

2. Cable that uses Polytetrafluoroethylene (Teflon™), or other soft material for the jacket insulation may experience inconsistent results or potentially be unsuitable for this tool. Soft insulation does not have the hardness needed for the cable to properly pull through the helix of the die set causing it to jam.

3. Overlapping tape wrapped jacket construction may make the jacket difficult to remove due to the 25 percent overlapping of jacket material at specific joints throughout the cable. It is

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.

recommended to use the stripping tool to score the cable jacket without cutting completely through the outer jacket to avoid underlying shield braid damage.

4. The “starting depth” for blade adjustment produces a very light score on the cable jacket. Operator should adjust cutting depth to preferred depth setting.

5. Three (3) conductor die sets come with only 1 blade. The blade is in the “B” side die (see figure 1). This will produce a single cut longitudinally on the cable jacket. Two conductor die sets have two (2) blades/cuts and will be removed in two segments.

6. Die sets referenced on figures 2, 3, and 4 are for left hand lay cable.

In addition to MIL-DTL-32610, this document references:

NEMA WC27500 Standard For Aerospace And Industrial Electric Cable

(Copies of this document are available at the National Electrical Manufacturers Association website https://nema.org.)

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
Navy - AS
Project 5120-2018-003

Review activities:
Army - AV, MI
Navy - EC, OS, SH
Air Force - 11, 20
DLA - GS
Industry association: SAE AE-8C2

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:12Z
Check the source to verify that this is the current version before use.