INCH-POUND
MS27510G
12 July 2002
SUPERSEDING
MS27510F
31 March 1988

DETAIL SPECIFICATION SHEET

COVERS, PROTECTIVE, ELECTRICAL, CONNECTOR PLUG, BAYONET COUPLING, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

Inactive for new design

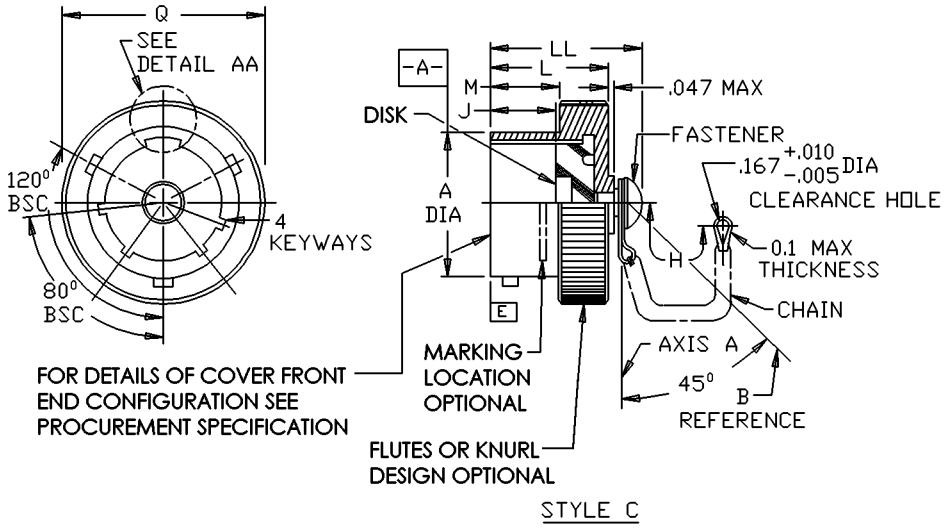

FIGURE 1. Cover.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

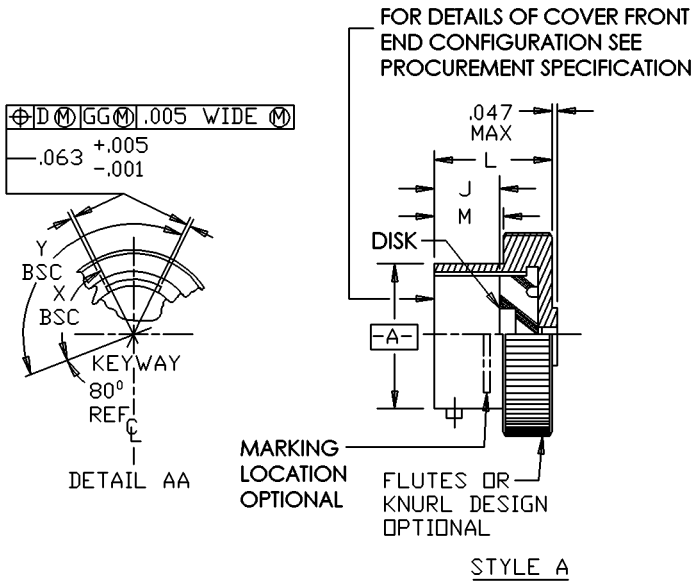

Shell size	A dia +.001 -.005	H +.500 -.250 standard chain length	J +.010 -.015	L max	M min	Q max dia	X BSC degree	Y BSC degree	LL max
8	.473	3.0	.222	.57	.31	.72	82°	118°	.82
10	.590					.85	72°	128°	
12	.750	3.50				1.00	68°	132°	
14	.875					1.13	66°	134°	
16	1.000					1.25	70°	130°	
18	1.125					1.38			
20	1.250	4.0				1.50			
22	1.375					1.63	74°	126°	
24	1.500					1.75			

FIGURE 1. Cover – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.03	.473	12.01	1.00	25.4	1.75	44.4
.005	.13	.500	12.70	1.125	28.58	3.0	76.2
.010	.25	.57	14.5	1.13	28.7	3.5	88.9
.015	.38	.59	15.0	1.25	31.8	4.0	101.6
.047	1.19	.72	18.3	1.375	34.92	5.0	127.0
.063	1.60	.75	19.0	1.38	35.1	6.0	152.4
.167	4.24	.82	20.8	1.50	38.1	7.0	177.8
.222	5.64	.85	21.6	1.63	41.4		
.250	6.35	.875	22.22				
.31	7.90						

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Finish: See MIL-DTL-38999.
4. BSC dimensions apply at maximum material condition (MMC).
5. The gauge features for GG shall be .004 inch (0.10 mm) smaller than MMC size at basic location.
6. Not for space born applications.

FIGURE 1. Cover – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.

Material:

Cap - Impact extruded or machined aluminum alloy.
Disk - Silicone or fluorosilicone elastomer.
Chain - Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
Fastener - Stainless steel, passivated.

Mating connectors: MIL-DTL-38999, series II plugs and MIL-C-27599, series II plugs.
The protective cover and chain assembly shall withstand a static tensile load of 35 pounds applied along the B reference line for 5 minutes.
Fastener tensile strength: Both axial and longitudinal directions shall be 25 pounds. The load shall be applied to the end of the chain.

Qualification:

Examination of product.
Mating and unmating forces.
Humidity.
Salt spray (corrosion).
Fastener tensile strength (see requirement).
Altitude immersion.

Group A sampling inspection. 100% inspection is not applicable. Sampling inspection shall be in accordance with table I:

TABLE I. Group A sampling plan.

Lot size	Sample size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

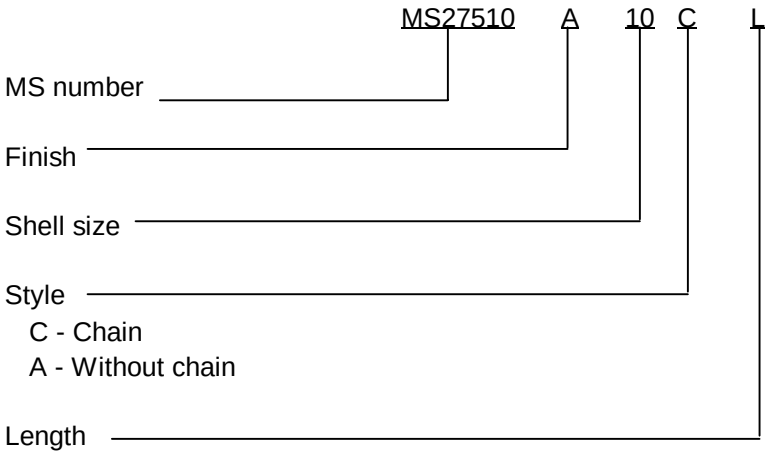

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99
DLA – IS

Preparing activity:
DLA – CC

(Project 5935–4382)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.