INCH-POUND

MS27558D
6 February 2004
SUPERSEDING
MS27558C (USAF)
31 January 1994

DETAIL SPECIFICATION SHEET

SUPPORT, CABLE, RIGHT ANGLE, CLOSED

Inactive for Air Force new design after of 14 November 1977.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26500.

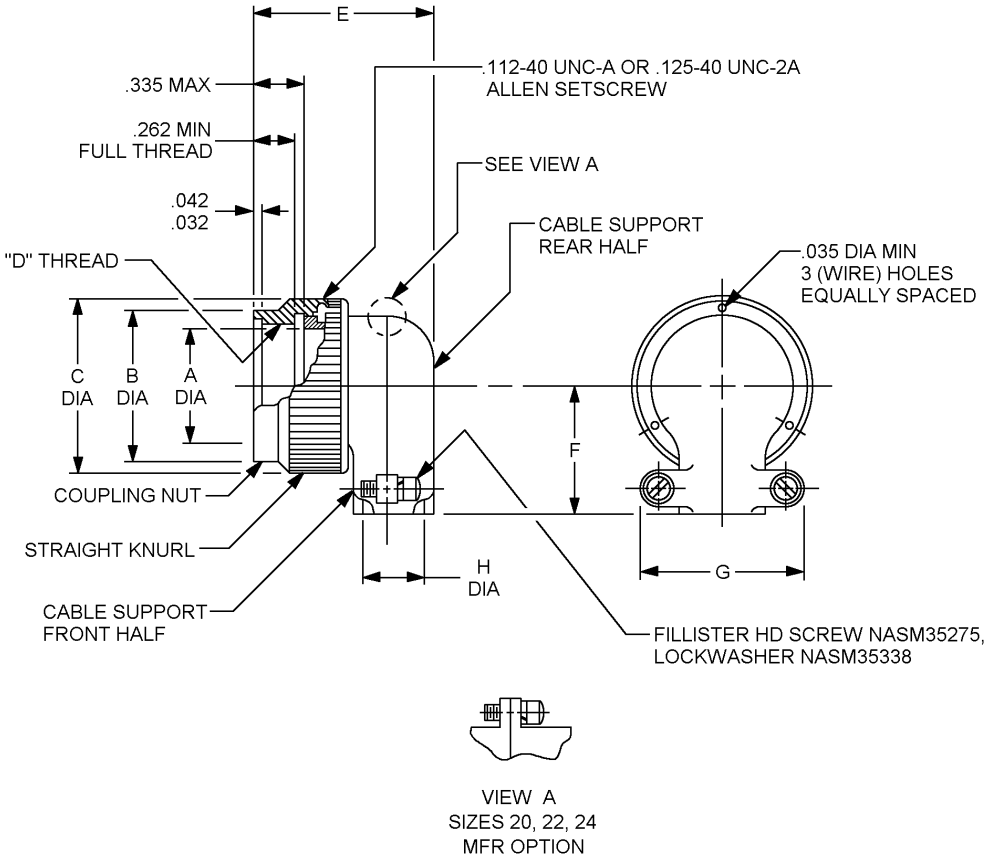

FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

MS Part or Identifying Number (PIN)	Size	A dia	B dia max	C dia max
MS27558-1	8	.348	.532	.672
MS27558-2	10	.440	.657	.797
MS27558-3	12	.600	.845	1.016
MS27558-4	14	.684	.907	1.110
MS27558-5	16	.789	1.032	1.234
MS27558-6	18	.922	1.157	1.360
MS27558-7	20	1.053	1.282	1.485
MS27558-8	22	1.172	1.407	1.610
MS27558-9	24	1.302	1.532	1.735

MS PIN	D Thread UNEF-28	E max	F max	G max	H dia
MS27558-1	.4375-28	1.200	.602	.892	.240
MS27558-2	.5625-24	1.320	.650	1.072	.365
MS27558-3	.750-20	1.320	.740	1.072	.365
MS27558-4	.8125-20	1.487	.775	1.108	.515
MS27558-5	.9375-20	1.470	.830	1.108	.515
MS27558-6	1.0625-18	1.588	.897	1.233	.640
MS27558-7	1.1875-18	1.759	.955	1.477	.775
MS27558-8	1.3125-18	1.759	1.015	1.477	.775
MS27558-9	1.4375-18	2.027	1.077	1.727	1.060

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	.25	.532	13.51	.830	21.08	1.072	27.23	1.360	34.54
.032	.81	.600	15.24	.845	21.46	1.077	27.36	1.407	35.74
.035	.89	.602	15.29	.892	22.66	1.108	28.14	1.470	37.34
.042	1.07	.640	16.26	.997	22.78	1.110	28.19	1.477	37.52
.240	6.10	.650	16.51	.907	23.04	1.157	29.39	1.485	37.72
.262	6.65	.657	16.69	.922	23.42	1.172	29.77	1.532	38.91
.335	8.51	.672	17.07	.955	24.26	1.200	30.48	1.588	40.34
.348	8.84	.684	17.37	1.015	25.78	1.233	31.32	1.610	40.89
.365	9.27	.740	18.80	1.016	25.81	1.234	31.34	1.727	43.87
.440	11.18	.775	19.68	1.032	26.21	1.282	32.56	1.735	44.07
.487	12.37	.789	20.04	1.053	26.75	1.302	33.07	1.750	44.45
.515	13.08	.797	20.24	1.060	26.92	1.320	33.53	2.027	51.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .010.

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configuration: See figure 1.

Coupling nut securely captivated to cable support and has provisions for locking in an indexed position.

Material and finish:

Aluminum components anodize in accordance with MIL-A-8625 or suitable hard anodizing process to meet the performance requirements of MIL-DTL-26500.

Cable support material: Aluminum alloy in accordance with ASTM B26 composition 13, A13, A380, or 380.

Coupling nut material: Aluminum alloy in accordance with ASTM B211 or SAE-AMS-QQ-A-367.

Threads shall be in accordance with MIL-S-7742.

Part or Identifying Number (PIN): MS27558- (see figure 1 tables for dash numbers).

Referenced documents. In addition to MIL-DTL-26500, this document references the following:

ASTM B26
ASTM B211
MIL-A-8625
MIL-DTL-26500
MIL-S-7742
SAE-AMS-QQ-A-367
NASM35275
NASM35338

CONCLUDING MATERIAL

Custodians:
Air Force – 11
DLA – CC

Preparing activity:
DLA – CC

Review activity:
Air Force – 99

(Project 5935–4419–012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.