INCH-POUND

MS27611E
10 November 1999
SUPERSEDING
MS27611D (USAF)
1 December 1982

# DETAIL SPECIFICATION SHEET

## VALVE, HYDRAULIC BLEEDER, AIRCRAFT WHEEL BRAKE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

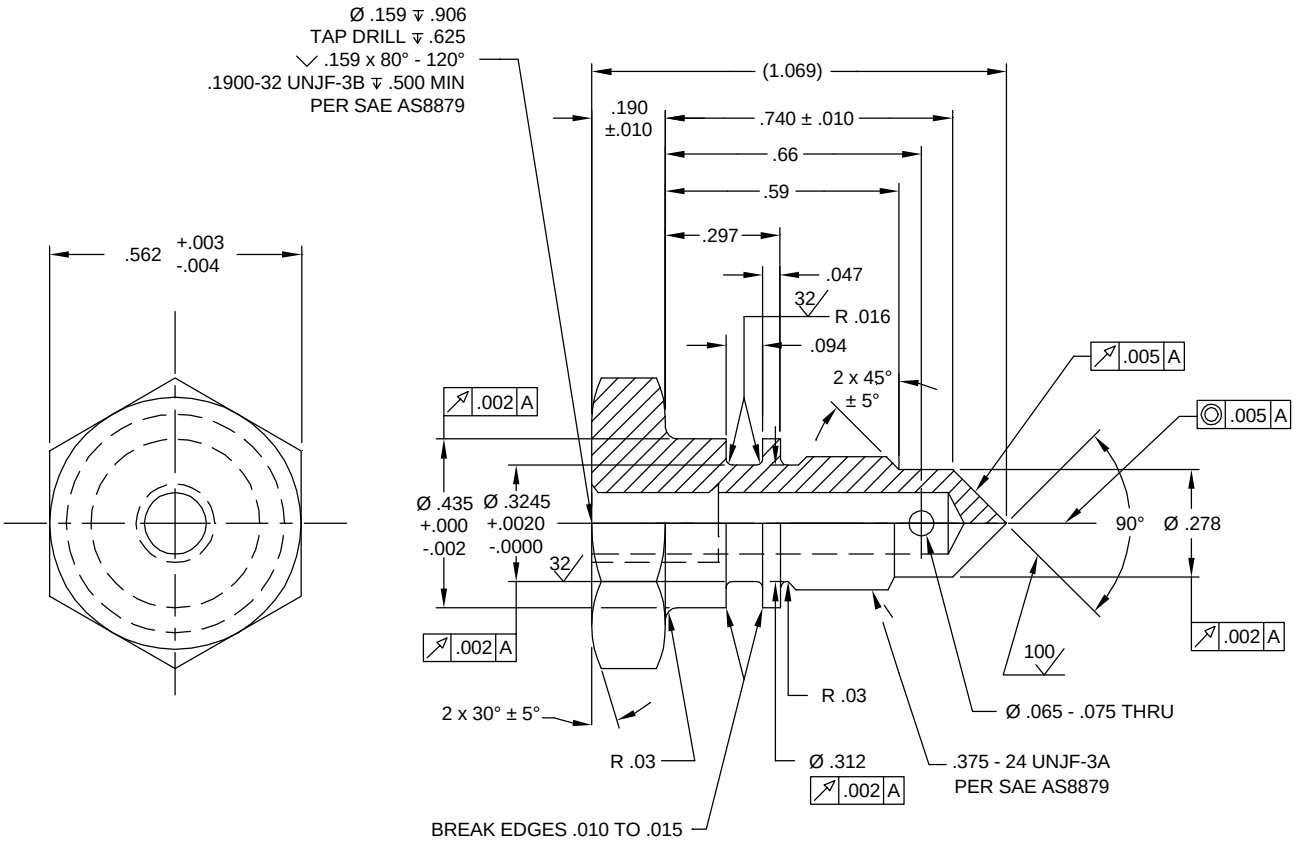


FIGURE 1. Valve.



AMSC N/A FSC 4820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Steel Rod, Type 8630 Per AMS6280.

   Alternative Material Types:
   4130 Per SAE AMS-S-6758
   4140 Per AMS6349 or AMS6382
   4330 Per AMS6427
   8740 Per AMS6327

2. Heat treat to C28RH to C33RH.

3. Finish: Cadmium plating is to be used only when other platings cannot meet the performance requirements of this specification. If cadmium plating is used, it shall be per QQ-P-416, Type II, Class 3, .0002 to .0003 inch thick.

4. Surface texture: Symbols per ASME Y14.36. Requirements per ASME B46.1. Unless otherwise specified surfaces to be 150 µin Ra.

5. Break edges .003 to .015 unless otherwise specified.

6. The valve shall withstand and seal 3,000 PSI min pressure.

7. Use O-Ring packing in accordance with MIL-P-83461/1, part number M83461/1-011, or equivalent.

NOTES:

1. Dimensioning and tolerancing: ASME Y14.5.

2. Dimensions are in inches. Unless otherwise specified, tolerances: Decimals ± .005, Angles ± .5°.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing activity:
DLA - CC

(Project 4820-0823)

Review activities:
Army -
Navy -
Air Force - 11, 70, 82



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.