INCH-POUND

A-A-52144
January 14, 1994

COMMERCIAL ITEM DESCRIPTION

ICEMAKER-DISPENSER: WITH WATER DISPENSER ATTACHMENT

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-I-43682.

1. ABSTRACT

1.1 Abstract. This commercial item description covers icemakers-dispensers with water dispenser attachments, in the following types, grades, sizes, and styles:

Type I - Air-cooled condenser
Type II - Water-cooled condenser

Grade A - Corrosion-resisting steel
Grade B - Low carbon steel

Size 1 - 525 pounds per day minimum (at 70°F ambient air temperature)
Size 2 - 200 pounds per day minimum (at 70°F ambient air temperature)

Style 1 - Floor style
Style 2 - Counter style

1.2 CID based part identification number (PIN). A document based PIN to identify type, grade, size, and style of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 4110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The icemaker-dispenser shall be a completely self-contained unit, capable of making and storing ice and dispensing ice and water. The icemaker-dispenser shall have a water-circulating system, electric motor, and all necessary piping, wiring, and control and safety devices. The icemaker-dispenser shall be totally enclosed in a structural frame and sheet metal housing with removable panels.

2.1.1 Exterior. The exterior of the grade A icemaker-dispenser shall be fabricated of 300 series stainless steel with a thickness of 24 gauge (minimum). The exterior of the grade B icemaker-dispenser shall be fabricated of low carbon steel with a thickness of 22 gauge (minimum). The exterior of the grade B icemaker-dispenser shall have the manufacturer's standard commercial finish, provided it conforms to NSF International Standard No. 12, as applicable.

2.1.2 Cooling condenser. The type I icemaker-dispenser shall be provided with an air-cooled condenser; and the type II icemaker-dispenser shall be provided with a water-cooled condenser.

2.1.3 Capacities. The icemaker-dispenser shall have the icemaking capacity listed in table I, under the conditions specified in table I.

TABLE I. Capacity conditions

Type	Size	Ambient air temp (^{o}F)	Potable water supply temp (^{o}F)	Condenser inlet water temp (^{o}F)	Minimum capacity for 60 Hz machine lb/24 hrs	Minimum capacity for 50 Hz machine lb/24 hrs
I	1	70	70	None	525	438
		100	90	None	380	333
I	2	70	70	None	200	167
		100	90	None	140	117
II	1	70	70	70	525	438
		100	90	90	400	333
II	2	70	70	70	200	167
		100	90	90	140	117

2.1.4 Legs. The floor style icemaker-dispenser shall be mounted on NSF International No. 12 approved six inch legs. The counter style icemaker-dispenser shall be mounted on NSF International No. 12 approved four to six inch legs.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

2.1.5 Valves. The front of the icemaker-dispenser shall be equipped with one ice-dispensing valve and one water-dispensing valve. A removable drain pan with a perforated tray shall be provided under the dispensing valves. The drain pan shall be removable without any special tools and shall have a drain hole capable of being left open or closed.

2.2 Storage bin. The storage bin shall be an integral part of the icemaker-dispenser. The storage bin shall be fabricated of 24 gauge (minimum) stainless steel or plastic. The capacity of the storage bin for the size 1 icemaker-dispenser shall be either 95, 45, or 25 pounds (minimum) as specified (see 5.2). The capacity of the storage bin for the size 2 icemaker-dispenser shall be either 30 or 8 pounds (minimum) as specified (see 5.2). The ice storage bin shall have a drainage opening. An automatic ice level control shall be installed in the storage bin to shut off the ice maker when the storage bin is full.

2.2.1 Insulation. Any blown-in insulation used during manufacturing shall use non-ozone depleting substances for propelling insulation. Loose fill type insulation shall not be used.

2.3 Refrigeration unit. The refrigeration unit shall be an integral part of the complete icemaker-dispenser. The assembled refrigeration unit shall be completely self-contained, completely wired, and completely dehydrated and charged with the proper amount and type of refrigerant and oil necessary for operation. The refrigerating system shall be fitted with a means of recovering and adding refrigerant to the system. The compressor and compressor motor shall be of the type and size to obtain the capabilities listed in Table I. Compressor motors, up to and including 3/4 hp, shall operate on a nominal 115 V, single-phase, 60 Hz electrical system. Compressor motors over 3/4 hp shall operate on a 208/230 V, single-phase, 60 Hz electrical system. Motors shall be protected against damage from overloads and voltage fluctuations when starting or running by means of a thermal overload protector. When 50 Hz frequency is specified, the motor shall be specifically designed for operation on that frequency (see 5.2).

2.3.1 Refrigerant. The refrigeration system shall be charged with a commercially available, non-ozone depleting refrigerant. The oil used in the compressor shall be suitable for use with the refrigerant.

2.3.2 Ozone depleting substances. Class I ozone depleting substances, in accordance with section 602(a) of the Clean Air Act Amendments 1990, 42 USC 7671a(a) as implemented by 40 CFR 82, Protection of Stratospheric Ozone, shall not be used for refrigerant gases, or for any other purpose, or employed in any process associated with the manufacture of any component parts for this item. See the 5.6 for additional information.

2.4 Standard compliance. The icemaker-dispenser shall comply with Air-Conditioning and Refrigeration Institution (ARI) Standard No. 810, American Society for Heating, Refrigerating, and Air Laboratories (UL) Standard No. 29, Underwriters Laboratories (UL) Standard No. 563, and NSF International Standard No. 12, as applicable (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

2.5 Data nameplate ("Government unique" requirement). The icemaker-dispensers shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the icemaker-dispenser by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the icemaker-dispenser.

2.6 Dissimilar metals. Joints between dissimilar metals which may become wet in service shall be protected against electrolytic or galvanic corrosion by proper selection of materials and coatings, or by isolation of the materials with gaskets, or by similar methods. Any bolts, nuts, pins, screws, and other fastening and fittings of metal shall be of the same material as that being joined or shall be cathodic to the material being joined.

2.7 Lubrication. All moving parts and surfaces requiring lubrication shall be easily accessible for all required lubricating procedures.

2.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.9 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.10 Workmanship. The finished icemaker-dispensers shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the icemaker-dispenser conforms to the requirements of ARI Standard No. 810, ASHRAE Standard No. 29, UL Standard No. 563, and NSF International Standard No. 12, as applicable.

3.2.1 Air-Conditioning and Refrigeration Institute (ARI). The contractor shall submit to the contracting officer a written certificate of compliance as proof that the icemaker-dispensers meet the applicable requirements of ARI.

3.2.2 American Society for Heating, Refrigerating and Air Conditioning Engineers (ASHRAE). The contractor shall submit to the contracting officer a written certificate of compliance as proof that the icemaker-dispensers meet the applicable requirements of ASHRAE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.2.3 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 563 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 563.

3.2.4 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 12 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each icemaker-dispenser shall be cleaned, preserved, packaged, packed, and unitized in accordance with ASTM D 3951.

4.3 Export packaging. Each icemaker-dispenser shall be disassembled to the extent determined by the supplier to protect the parts susceptible to damage during shipment and storage and for reduction of cubage. Parts removed shall be identified. The icemaker-dispenser and removed parts shall be cleaned, preserved, and cushioned to afford protection against corrosion, deterioration, and physical damage during shipment and storage. Disassembled parts shall be packaged in a class weather-resistant fiberboard box conforming to PPP-B-636 and placed within the icemaker-dispenser or into the shipping container with the main assembly.

4.4 Export packing. Each icemaker-dispenser shall be packed into a snug-fitting wood box according to the weight of the assembly and the weight limit of the box. Boxes used shall be either an overseas type, style A or B, wood cleated plywood box conforming to PPP-B-601 or a type II, style A or B, class 1 or 2, grade I, wood cleated box conforming to MIL-B-26195. The contents of all boxes shall be cushioned, blocked, and braced to prevent movement while the box is in transit. Each shipping container shall be closed and strapped in accordance with the appropriate specification requirement.

4.5 Marking (commercial and export). Marking of shipping containers and unit loads shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5. NOTES

5.1 Intended use. The icemaker-dispenser covered by this commercial item description is intended for use in garrison dining halls, hospitals, and non-shipboard galleys where a continuous supply of dispensed ice and water is needed.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type, grade, size, and style, required (see 1.1, 1.2, and 5.4).
c. Storage bin capacity required (see 2.2).
d. Electrical requirements if other than specified (see 2.3).
e. Government approved manual number to be included on data nameplate (see 2.5).
f. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ARI Standard No. 810 - Standard for Automatic Commercial Icemakers

ARI documents are available from:

Air-Conditioning and Refrigeration Institute
1815 North Fort Myer Drive
Arlington, VA 22209

ASHRAE Standard No. 29 - Methods of Rating and Testing Ice Makers

ASHRAE documents are available from:

American Society of Heating, Refrigerating, and Air Conditioning Engineers, Inc.
United Engineering Center
345 East 47th Street
New York, NY 10017

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

NSF International Standard No. 12 - Automatic Ice Making Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 563 - UL Standard for Safety Ice Makers


UL documents are available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

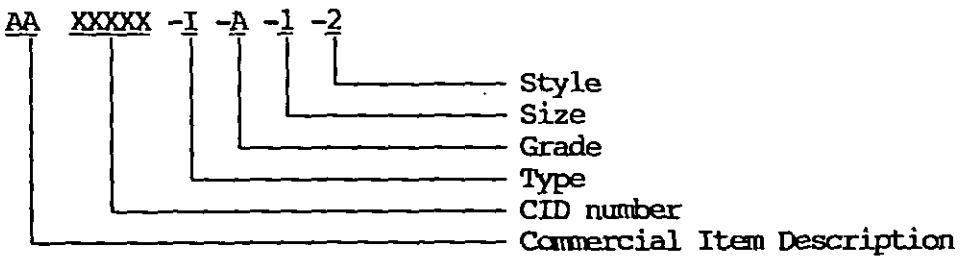

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.6 Ozone depleting substances. For current information about the status of the Environmental Protection Agency's (EPA) Significant New Alternatives Policy (SNAP) program and specific refrigerant alternatives, call the Stratospheric Ozone Protection Hotline at (800) 296-1996 or the SNAP Coordinator at (202) 233-9195. For published information see the EPA Stratospheric Ozone Protection, Fact Sheet (EPA-430-F-93-004 dated February 1993) Short List of Alternative Refrigerants and Action Guide (EPA-430-F-93-003, dated February 1993) Cooling & Refrigerating without CFCs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD, QM
Navy - MS, SA
Air Force - 50, 82
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 4110-0475

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY		
a. NAME U.S. Army Natick RD&E Center	b. TELEPHONE (Include Area Code) (1) Commercial 508-651-5175	(2) AUTOVON/DSN 256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SATNC-WEE Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.