MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, STRAIGHT, SHIELD TERMINATION, CATEGORY 3A (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

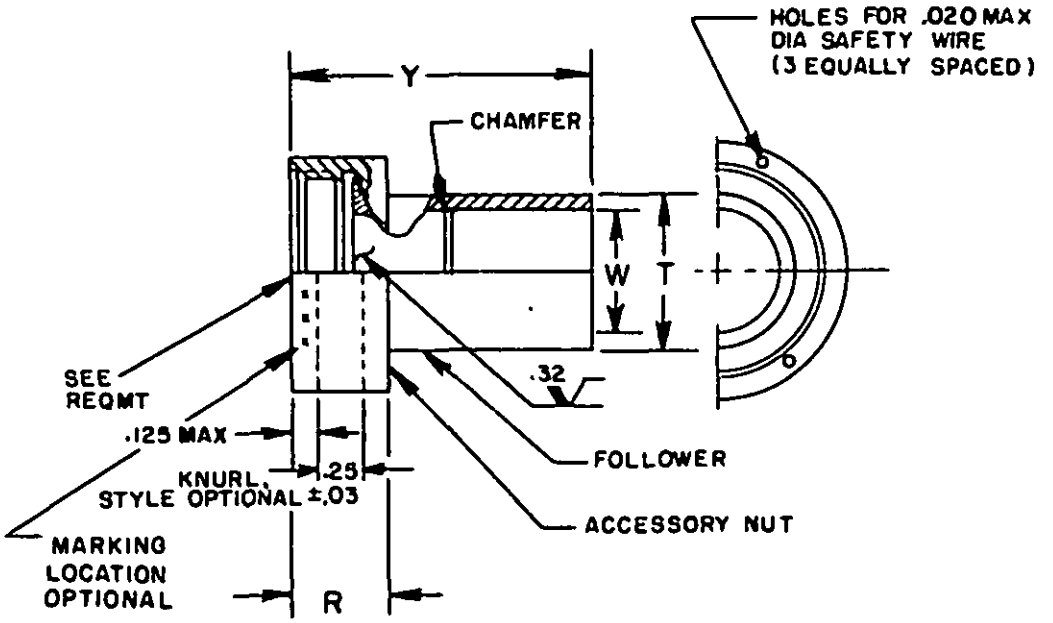


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

DASH NUMBER	FOR CONNECTOR SHELL SIZE (REF)			
	MIL-C-81703 SERIES 3	MIL-C-26482 SERIES 2	MIL-C-5015 CRIMP	MIL-C-83723 SERIES III
- 3	3			
- 8		8	8S	8
-10		10	10S,10SL	10
-12	7	12	12S&12	12
-14	12	14	14S&14	14
-16	19	16	16S&16	16
-18	27	18	18	18
-20	37	20	20	20
-22		22	22	22
-24		24	24	24
-28			28	
-32			32	
-36			36	
-40			40	
-44			44	
-48			48	
-61	61			


DASH NUMBER	R +.000 -.062	T ±.010 DIA.	W ±.015 DIA.	Y +.000 -.062	M85049/26-2 RING, SHIELD CRIMP (REF)
- 3	.540	.337	.250	1.277	—
- 8	.540	.337	.250	1.277	-8
-10	.540	.488	.375	1.277	-10
-12	.540	.500	.420	1.277	-12
-14	.540	.620	.540	1.277	-14
-16	.540	.750	.670	1.277	-16
-18	.540	.880	.789	1.277	-18
-20	.540	1.000	.914	1.277	-20
-22	.540	1.120	1.039	1.277	-22
-24	.540	1.192	1.112	1.277	-24
-28	.702	1.545	1.389	1.439	-28
-32	.702	1.795	1.635	1.439	-32
-36	.702	2.045	1.850	1.439	-36
-40	.702	2.295	2.065	1.439	-40
-44	.702	2.545	2.320	1.439	-44
-48	.702	2.795	2.570	1.439	-48
-61	.540	1.359	1.210	1.277	-61

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.045	1.14	.734	18.64	1.218	30.94	1.468	37.29	2.219	56.36
.062	1.57	.858	21.79	1.277	32.44	1.593	40.46	2.469	62.71
.617	15.67	.984	24.99	1.345	34.16	1.653	41.99	2.719	69.06
.669	16.99	1.112	28.24	1.439	36.55	1.969	50.01	2.969	75.41
								3.219	81.76

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

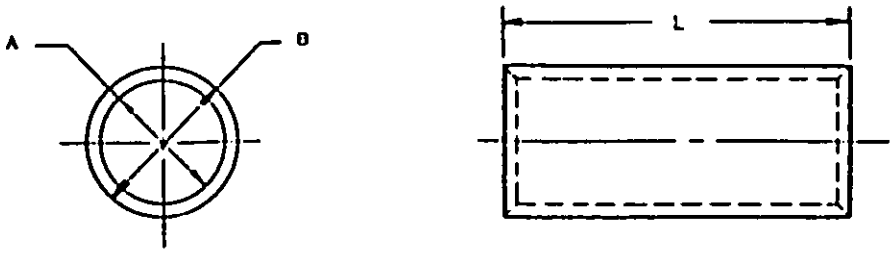

DASH NO.	COLOR CODE	A DIA		B DIA		L ±.020	FOR USE WITH BACKSHELLS (REF)
		MIN	MAX	MIN	MAX		
-8	GREEN	.400	.410	.448	.458	.250	M85049/26-1-8
-10	RED	.585	.595	.660	.680	.440	M85049/26-1-10
-12							M85049/26-1-12
-14	BLUE	.703	.715	.780	.800		M85049/26-1-14
-16	GRAY	.835	.845	.910	.930		M85049/26-1-16
-18	BROWN	1.005	1.015	1.080	1.100		M85049/26-1-18
-20	GREEN	1.125	1.135	1.200	1.220		M85049/26-1-20
-22	PINK	1.245	1.255	1.320	1.340		M85049/26-1-22
-24							M85049/26-1-24
-28	RED	1.665	1.675	1.740	1.760		M85049/26-1-28
-32	GRAY	1.915	1.925	1.990	2.010		M85049/26-1-32
-36	GREEN	2.165	2.175	2.240	2.260		M85049/26-1-36
-40	ORANGE	2.415	2.425	2.490	2.510		M85049/26-1-40
-44	YELLOW	2.665	2.675	2.740	2.760		M85049/26-1-44
-48	BLUE	2.915	2.925	2.990	3.010		M85049/26-1-48
-61	PURPLE	1.435	1.445	1.510	1.530		M85049/26-1-61

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.020	.51	.458	11.63	.930	23.62	1.340	34.04	2.260	57.40
.250	6.35	.680	17.27	1.100	27.94	1.530	38.86	2.510	63.75
.440	11.18	.800	20.32	1.220	30.99	1.760	44.70	2.760	70.10
						2.010	51.05	3.010	76.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions apply after plating.
4. Figure 2 is used with figure 1.

FIGURE 2. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configurations: See figures 1 and 2.

Interface dimensions shall conform to MS3155.

Figure 1 consists of an accessory nut and follower. The accessory nut shall be captivated to, and free to rotate on the follower.


Material and finish: See table I.

TABLE I. Material and finish.


Figure	Designator	Material	Finish
1	---	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
2	---	Copper, ASTM B75, Type OLP-WW-T-799 Rockwell F-50 max.	Tin plate in accordance with MIL-T-10727 Type 1, color coded per table (see figure 2)

1/ Not for Navy use.

Part number:
For figure 1: See example below:

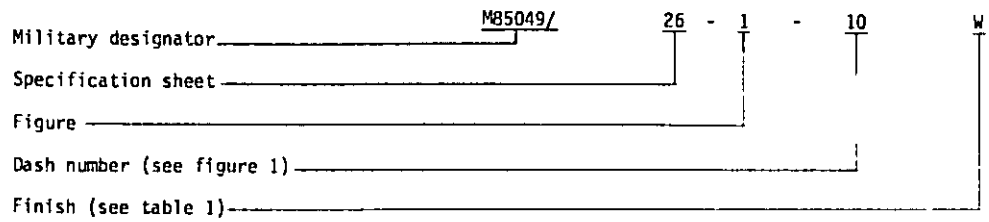


For figure 2:

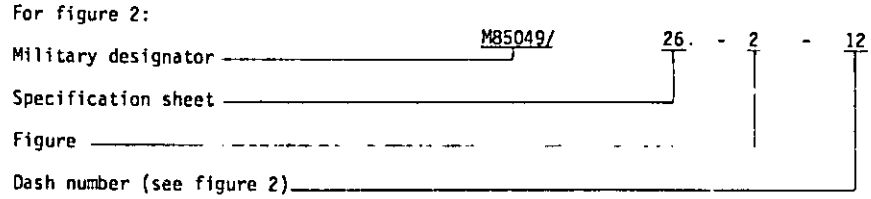

Qualification:
See MIL-C-85049, Category 3A. Figure 2 will require examination of product only.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.
Supersession data:

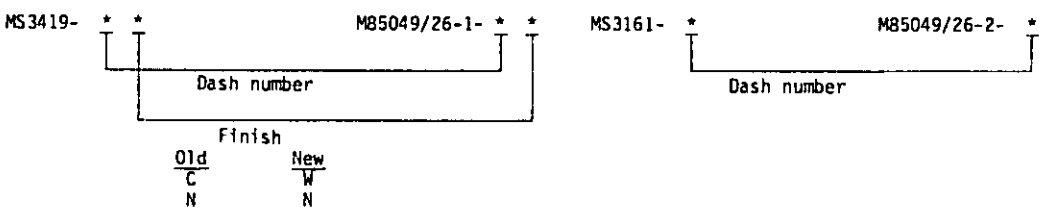

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.