MILITARY SPECIFICATION SHEET

Ⓐ CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, STRAIGHT, INDIVIDUAL SHIELDED WIRE TERMINATION, CATEGORY 3B (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

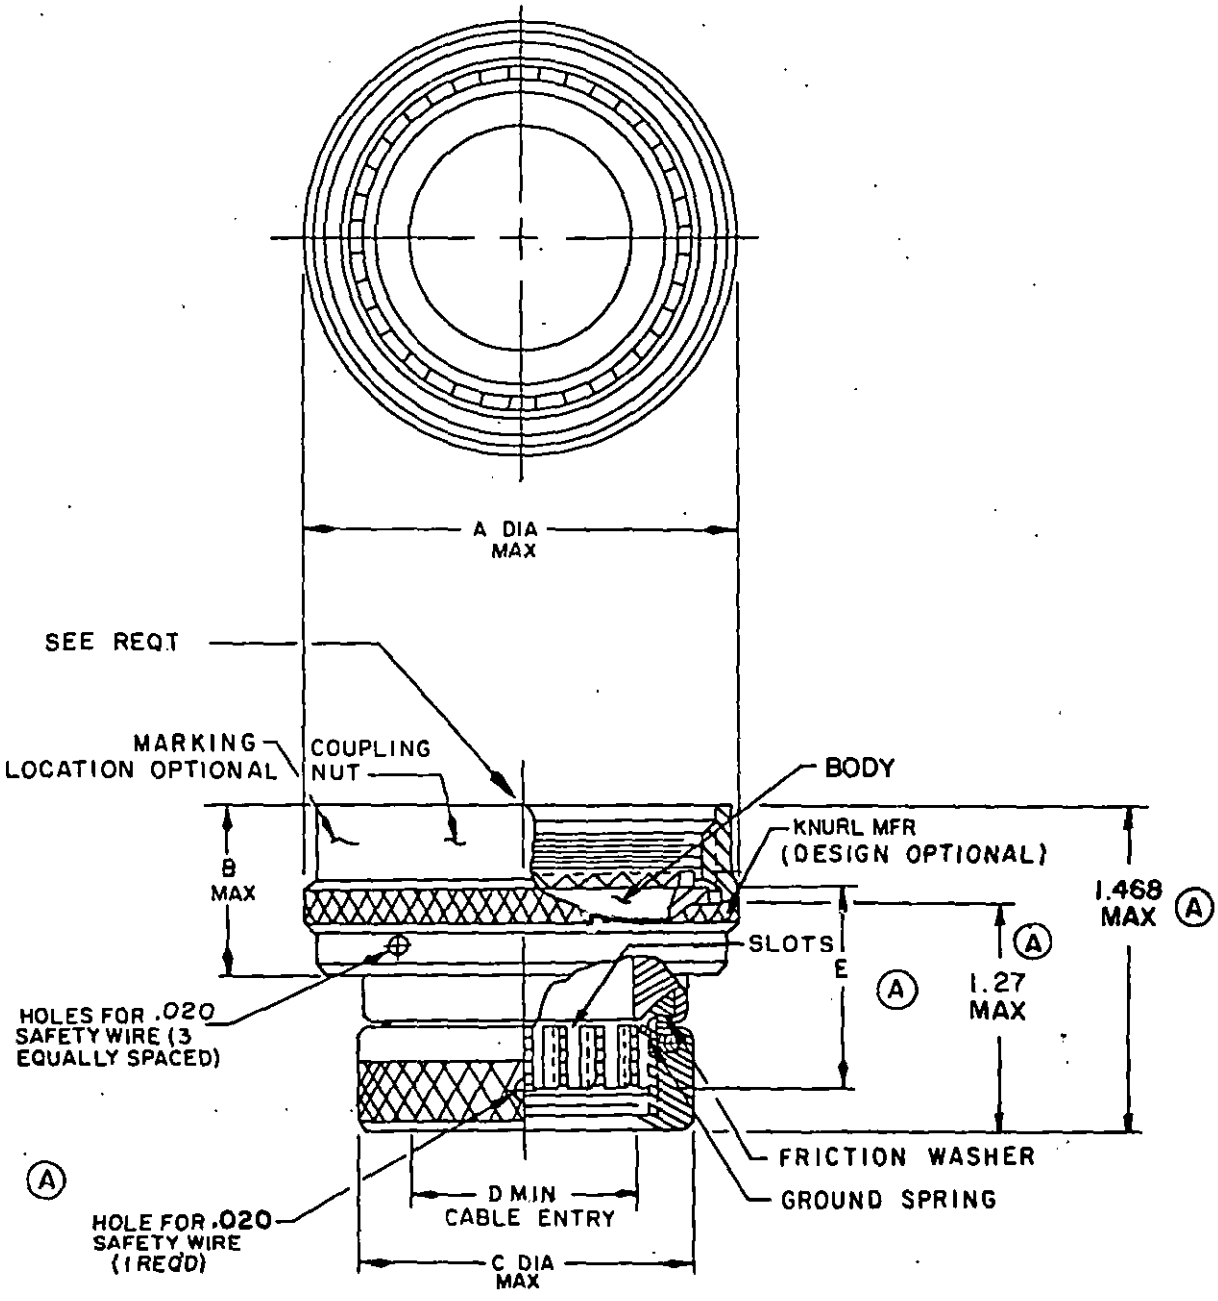


FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2020-04-30T10:12Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.020	0.51	.844	21.44	1.219	30.96
.250	6.35	.85	21.59	1.25	31.75
.375	9.53	.92	23.37	1.27	32.26
.500	12.70	.970	24.64	1.30	33.02
.54	13.72	1.00	25.40	1.40	35.56
.55	13.97	1.05	26.67	1.42	36.07
.625	15.88	1.094	27.79	1.468	37.29
.67	17.02	1.10	27.94	1.50	38.10
.75	19.05	1.17	29.72	1.65	41.91
.80	20.32			1.67	42.42
				1.75	44.45

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Ⓐ Dimensions and configuration: See figure 1 and table I.

Ⓐ Accessory interface dimensions shall conform to MIL-C-38999, series I and II.

The accessory shall consist of a coupling nut and body, with provisions to terminate individual shields per MS27741. The coupling nut shall be captivated to the body and free to rotate.

Material:

Shell: Aluminum alloy in accordance with MIL-C-85049.
Ground spring: Copper alloy, gold plated.
Friction washer: Teflon.

Finish:

1/ N, W.


Ⓐ TABLE I. Shell size and dimensions.

Dash no.	Fits connector shell size		A diameter maximum	B maximum	C diameter maximum	D minimum	E ±.060	No. of slots
	Series II	Series I						
08	8	9	.75	.54	.55	.250	1.00	3
10	10	11	.85	.54	.67	.375	1.00	4
12	12	13	1.00	.54	.80	.500	1.00	6
14	14	15	1.10	.54	.92	.625	1.00	8
16	16	17	1.25	.54	1.05	.750	1.00	10
18	18	19	1.40	.54	1.17	.844	1.00	10
20	20	21	1.50	.54	1.30	.970	1.00	12
22	22	23	1.65	.54	1.42	1.094	1.00	15
24	24	25	1.75	.54	1.67	1.219	1.00	15

Ⓐ 1/ N Not for Navy use. Air Force: For space applications only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Part number: See example below:

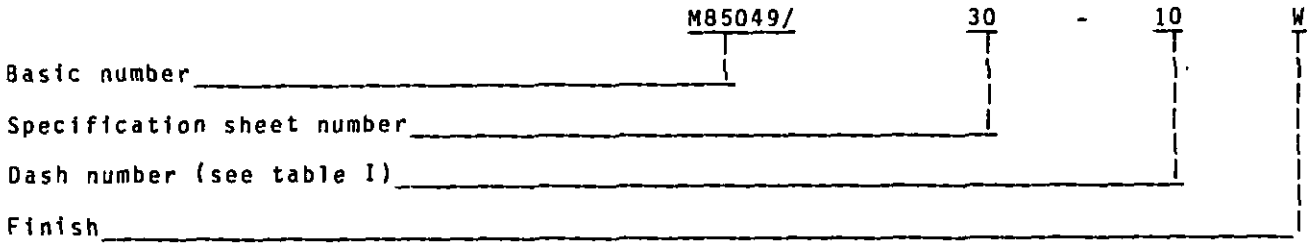


Ⓐ Assembly instructions: Simplified assembly instructions shall be packaged with each accessory.

Qualification:

See MIL-C-85049, category 38.

Ⓐ QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

Supersession data:

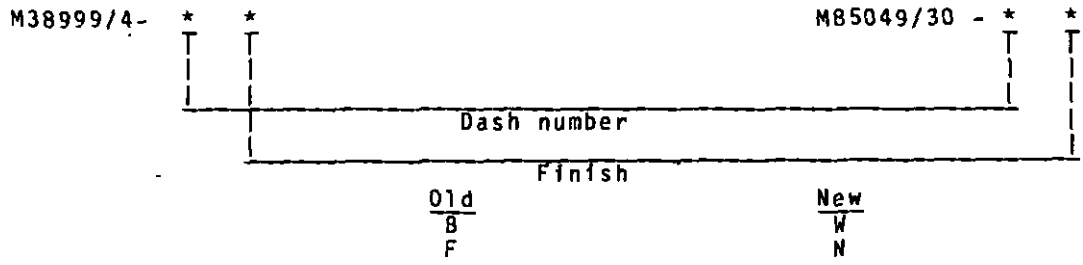

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3377-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.