INCH-POUND

MIL-C-85049/34A
30 November 1990
SUPERSEDING
MIL-C-85049/34
16 January 1980
MS3184B
10 May 1982

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, THREADED ADAPTER, CATEGORY 3C (FOR MIL-C-26482 SERIES I JAM NUT RECEPTACLE CONNECTOR)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

INACTIVE FOR NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT.

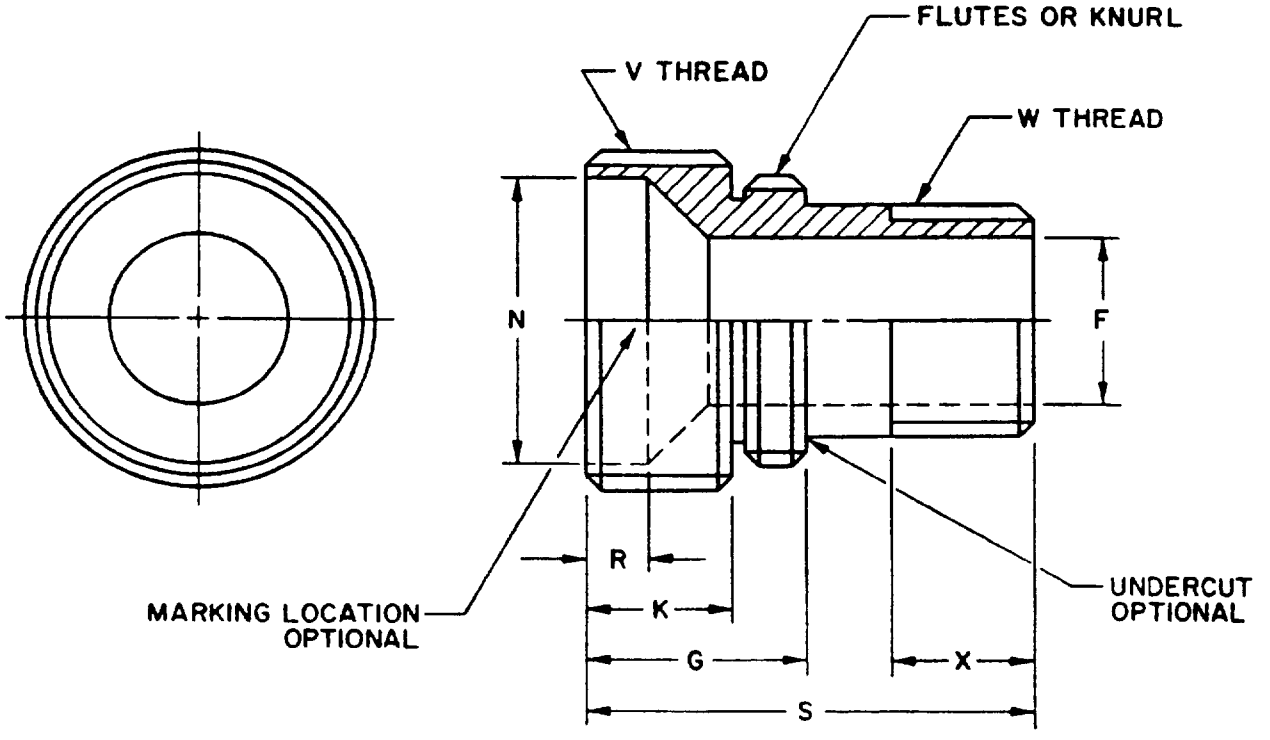


FIGURE 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Shell Size	F +.005 -.001 Dia	G +.001 -.016	K +.017 -.000	N +.010 -.011 Dia	R ±.016	S Max	V Thread UNEF Class 2A	W Thread UNEF Class 2A	X Min Full Thread
8	.322	.391	.256	.500	.094	.812	.625-24	.4375-28	.250
10	.439			.609			.750-20	.5625-24	
12	.564			.734			.875-20	.6875-24	
14	.668			.859			1.000-20	.8125-20	
16	.793			.969			1.125-18	.9375-20	
18	.910			1.109			1.250-18	1.0625-18	
20	1.025	.422	.302	1.219	.125	.906	1.375-18	1.1875-18	.312
22	1.150			1.344			1.500-18	1.3125-18	
24	1.275			1.469		.937	1.625-18	1.4375-18	

INCH	mm	INCH	mm	INCH	mm
0.001	0.03	0.5625	14.29	1.000	25.40
0.005	0.13	0.564	14.33	1.025	26.03
0.010	0.25	0.609	15.47	1.0625	26.99
0.011	0.28	0.625	15.88	1.109	28.17
0.016	0.41	0.668	16.97	1.125	28.58
0.017	0.43	0.6875	17.46	1.150	29.21
0.094	2.39	0.734	18.64	1.1875	30.16
0.125	3.18	0.750	19.05	1.219	30.96
0.250	6.35	0.793	20.14	1.250	31.75
0.256	6.50	0.812	20.62	1.275	32.39
0.302	7.67	0.8125	20.64	1.3125	33.34
0.312	7.92	0.859	21.82	1.344	34.14
0.322	8.18	0.875	22.22	1.375	34.93
0.391	9.93	0.906	23.01	1.4375	36.51
0.422	10.72	0.910	23.11	1.469	37.31
0.4375	11.11	0.937	23.80	1.500	38.10
0.439	11.15	0.9375	23.81	1.625	41.28
0.500	12.70	0.969	24.61		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction:

   Dimensions and configuration: See figure 1 and table I.

2. Material and finish: See table II.


TABLE II. Material and finish.

Figure	Material	Finish
1	Aluminum alloy in accordance with MIL-C-85049	1/ W


1/ W finish is not for use in space application.

3. Qualification: See MIL-C-85049, category 3C. Bending moment is not applicable. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

4. Part Number: See example below:

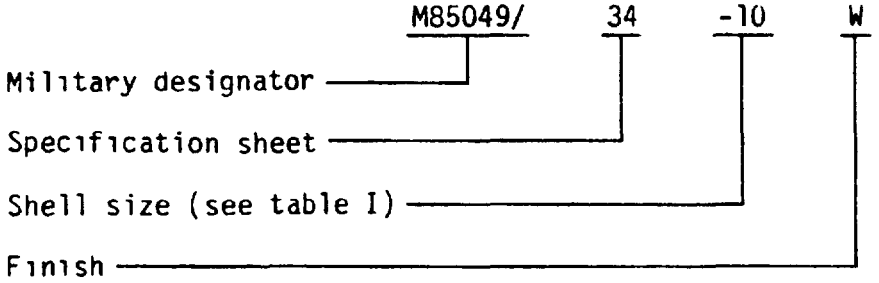

5. Supersession data:

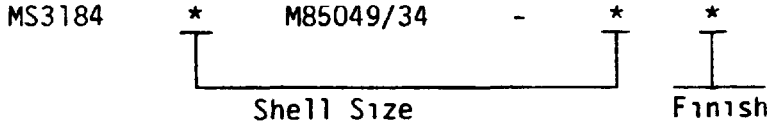

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Dimensions apply after plating.
4. For use with MS3114 and MS3124 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.