
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, 90°, CATEGORY 4c (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

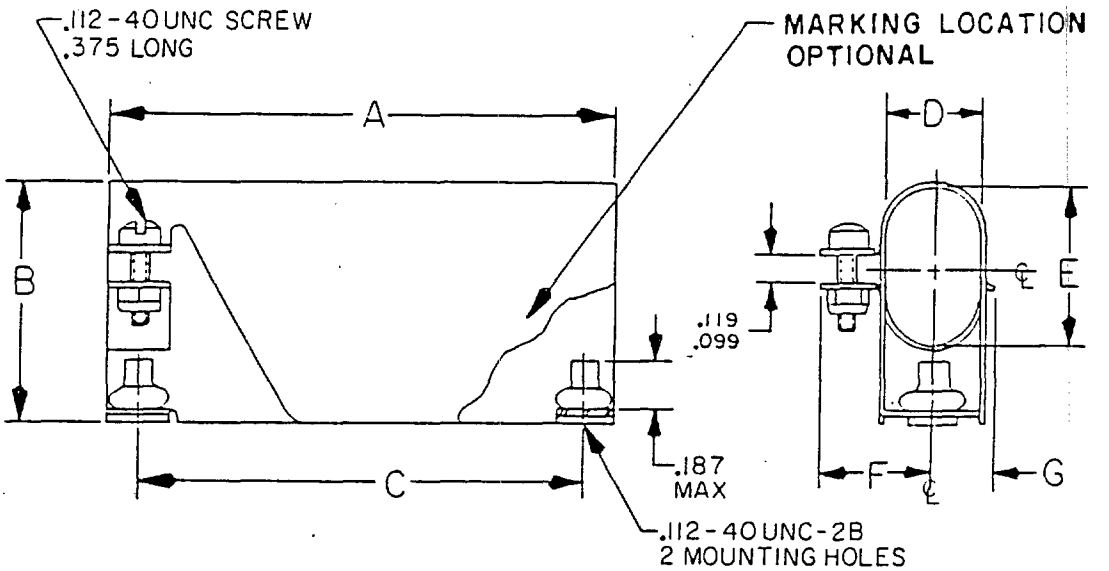

Part number		Shell size	A	B	C	D	E	F	G
Steel	Nonmagnetic (brass) (A)								
M85049/50-1	M85049/50-6	1	1.218 1.188	.748 .688	.989 .979	.467 .407	.467 .407	.498 .438	.311 .251
M85049/50-2	M85049/50-7	2	1.546 1.516	.748 .688	1.317 1.307	.467 .407	.467 .407	.498 .438	.311 .251
M85049/50-3	M85049/50-8	3	2.093 2.063	.998 .938	1.857 1.847	.467 .407	.655 .595	.498 .438	.311 .251
M85049/50-4	M85049/50-9	4	2.733 2.703	1.217 1.157	2.505 2.495	.467 .407	.842 .782	.498 .438	.311 .251
M85049/50-5	M85049/50-10	5	2.640 2.610	1.280 1.220	2.411 2.401	.592 .532	.936 .876	.561 .501	.373 .313

Inches	mm
.688	17.48
.748	19.00
.938	23.83
.998	25.35
1.157	29.39
1.188	30.18
1.217	30.91
1.218	30.94
1.220	30.99
1.280	32.51
1.516	38.51
1.546	39.27
2.063	52.40
2.093	53.16
2.610	66.29
2.640	67.06
2.703	68.66
2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.
(A) 4. Electroless nickel finish is not for Navy use.
(A) 5. Electroless nickel shall be used in aerospace application only.

FIGURE 1. Configurations and dimensions.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the accessory.
Material and finish: See table I.

Ⓐ TABLE I. Material and finish.

Part name	Material 1/	Finish
Screw Nut 2/	300 series stainless steel	S
Screw Nut 3/	Brass	F, Z
Clamp cable	Low carbon sheet steel SAE 1010 .024 thick. Brass sheet in accordance with QQ-B-613 alloy 260 1/2 H.	F, Z, and N
Shell	Low carbon sheet steel SAE 1010 Soft rolled brass in accordance with QQ-B-613, composition 2, anneal temper	
Rivnut or equivalent	Aluminum alloy in accordance with MIL-C-85049	A

1/ For material see figure 1.
2/ For dash numbers -3, -4, and -5 - MS21083N04.
3/ For dash numbers -8, -9, and -10 - MS21083B04.

Finish designator:

Ⓐ Finish F - Yellow chromate over cadmium in accordance with QQ-P-416, type II, class 2.

Ⓐ Finish Z - Zinc plated in accordance with ASTM B633, type II.


Ⓐ Finish N - Electroless nickel in accordance with MIL-C-26074, class 1 or 2, grade B (see notes 4 and 5 on page one).

Ⓐ Finish A - Black anodize in accordance with MIL-A-8625, type II.

Ⓐ Finish S - Passivate in accordance with QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Part number: See example below:

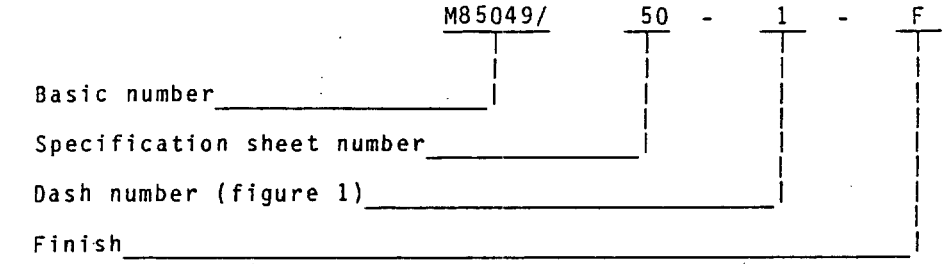


Qualification:

See MIL-C-85049, category 4c.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

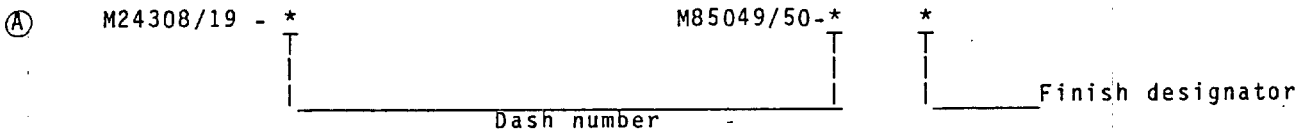

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Air Force - 11, 99
DLA - ES

Civil Agencies Coordinating Activities:
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3668-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.