MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, 90°,
CATEGORY 4C (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

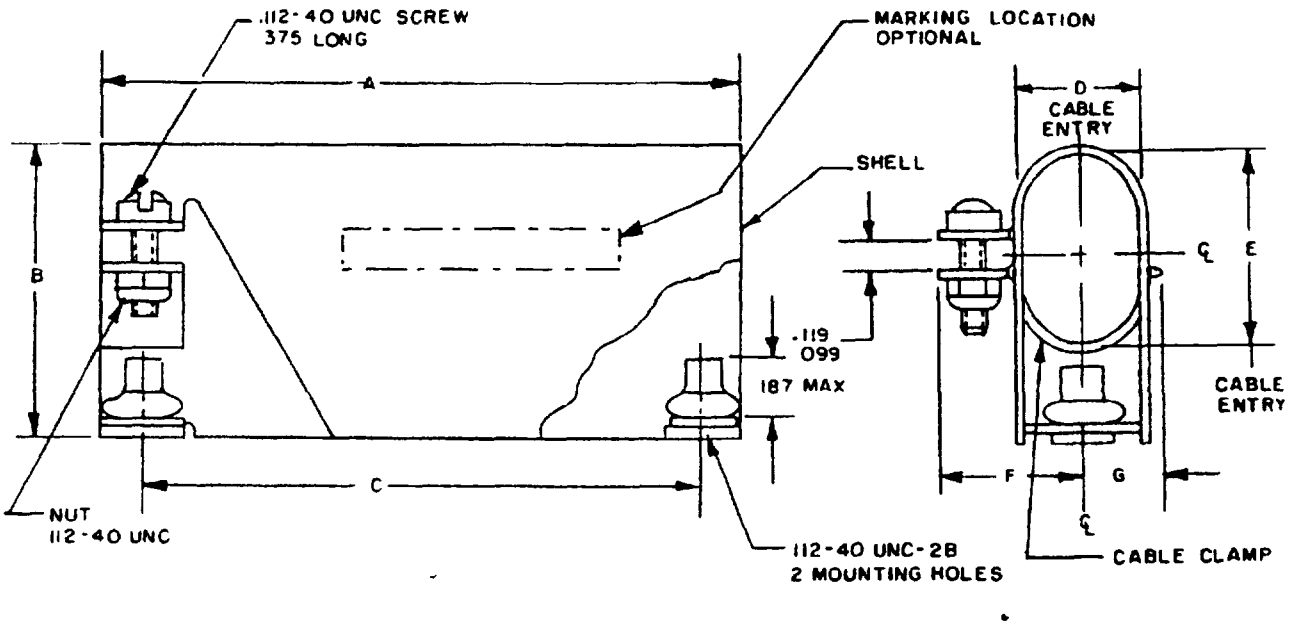


FIGURE 1. Configurations and dimensions.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN)		Shell size	A	B	C	D	E	F	G
Steel	Nonmagnetic (brass)								
M85049/50-1	M85049/50-6	1	1.218 1.188	.748 .688	.989 .979	.467 .407	.467 .407	.498 .438	.311 .251
M85049/50-2	M85049/50-7	2	1.546 1.516	.748 .688	1.317 1.307	.467 .407	.467 .407	.498 .438	.311 .251
M85049/50-3	M85049/50-8	3	2.093 2.063	.998 .938	1.857 1.847	.467 .407	.655 .595	.498 .438	.311 .251
M85049/50-4	M85049/50-9	4	2.733 2.703	1.217 1.157	2.505 2.495	.467 .407	.842 .782	.498 .438	.311 .251
M85049/50-5	M85049/50-10	5	2.640 2.610	1.280 1.220	2.411 2.401	.592 .532	.936 .876	.561 .501	.373 .313

Inches	mm	Inches	mm	Inches	mm
.251	6.38	.655	16.64	1.516	38.51
.311	7.90	.688	17.48	1.546	39.27
.313	7.95	.748	19.08	2.063	52.40
.373	9.47	.938	23.83	2.093	53.16
.407	10.34	.998	25.36	2.401	60.99
.438	11.13	1.157	29.39	2.411	61.24
.468	11.86	1.188	30.18	2.495	63.37
.498	12.65	1.217	30.91	2.610	66.29
.532	13.51	1.218	30.94	2.640	67.06
.592	15.04	1.307	33.20	2.703	68.66
.595	15.11	1.317	33.45	2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply after plating.
4. Electroless nickel finish is not for Navy use.
5. Electroless nickel shall be used in aerospace application only.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the accessory

Material and finish See table I.

Ⓑ TABLE I. Material and finish.

Dash number	Material			Finish	
	Shell	Cable clamp	Screw/Nut 1/	Shell/ Cable clamp	Screw/Nut
1 2 3 4 5	Low carbon sheet steel	Low carbon sheet steel SAE 1010 .024 thick	Steel 2/	F 3/	F 3/ 4/
1 2 3 4 5			300 series corrosion resistant steel 5/	N	Passivate in accordance with QQ-P-35
6 7 8 9 10	Brass in accordance with QQ-B-613 composition 260	Brass in accordance with QQ-B-613 composition 260, 1/2 hard	Brass 6/	F 3/	F 3/ 4/
6 7 8 9 10			300 series corrosion resistant steel 5/	N 7/	Passivate in accordance with QQ-P-35

1/ Rivnuts (or equivalent) shall be aluminum alloy in accordance with MIL-C-85049, black anodized in accordance with MIL-A-8625, type II.
2/ Steel nuts for -3, -4, and -5 shall be MS21083B04 and MS21083N04.
3/ Class F finish is not for space flight use.
4/ Cadmium plated screws and nuts shall be class 3 thickness in accordance with QQ-P-416.
5/ Corrosion resistant nuts for -3, -4, and -5 and -8, -9, and -10 shall be MS21083C04.
6/ Brass nuts for -8, -9, and -10 shall be MS21083B04 and MS21083N04.
7/ Class N finish is not for Navy use. Air Force only use class N finish for space application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Finish designator.

Finish F - Yellow chromate over cadmium in accordance with QQ-P-416, type II, class 2.

Finish N - Electroless nickel in accordance with MIL-C-26074, class 1 or 2, grade B (see notes 4 and 5 on page 1).

PIN See example below.

M85049/ 50 - 1 - F

Military designator

Specification sheet number

Dash number (figure 1)

Ⓑ Finish designator (see table I)

Qualification.

See MIL-C-85049, category 4c.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Ⓑ Supersession data 1/

M24308/19 - * (Dash number (figure 1)) M85049/50 - * (Dash number (figure 1)) M85049/50 - * (Finish designator) F

1/ Finish Z is cancelled. Parts with finish F shall be substituted for parts with finish code.

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Air Force - 11, 99
DLA - ES

Civil Agencies Coordinating Activities:
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3773-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.