
MILITARY SPECIFICATION SHEET

Ⓐ CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4C
(FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

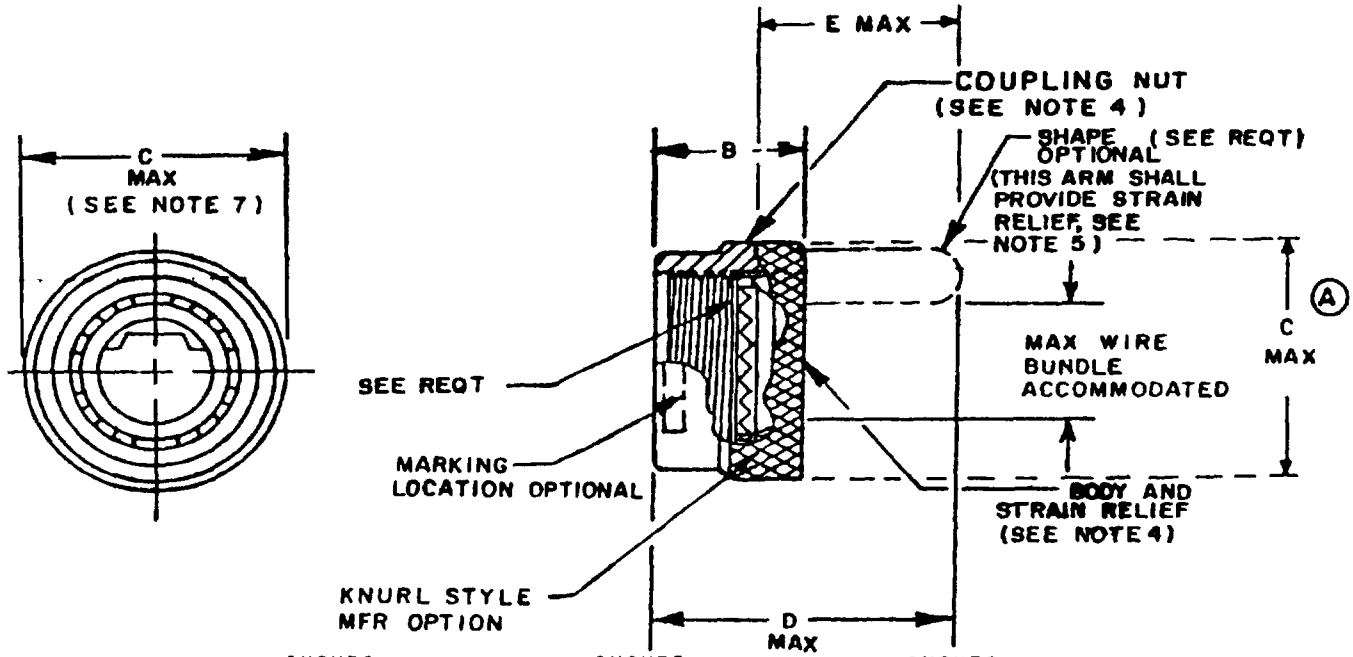

INCHES	mm	INCHES	mm	INCHES	mm
.264	6.71	.98	24.89	1.39	35.31
.392	9.96	1.00	25.40	1.40	35.56
.506	12 85	1.09	27.69	1.41	35.81
.54	13.72	1.094	27.79	1.45	36.83
.631	16.03	1 10	27.94	1.50	38.10
.75	19.05	1.14	28.96	1.52	38.61
756	19.20	1.15	29.21	1.59	40.39
.844	21.44	1.16	29.46	1.64	41.66
85	21.59	1.20	30.48	1.65	41.91
.86	21.84	1.219	30.96	1.75	44.45
90	22.86	1.25	31.75	1.77	44.96
.96	24 38	1.28	32.51	1.78	45.31
.970	24.64	1.33	33.78	1.89	48.01

NOTES:
1. Dimensions are in inches.
2. Tolerances shall be: xx = ±.03 and .xxx = ±.015 angular tolerances x = ±2.
Ⓐ 3. Metric equivalents are given for general information only.
4. Complete strain relief unit consists of coupling nut and body with strain relief arm. The coupling nut shall be captivated to the body and free to rotate.
5. Strain relief unit is used with MS3367-1-X plastic strap, MIL-T-713 lacing twine or MIL-T-43435 lacing tape or equivalent, not supplied with the backshell.
Ⓐ 6. This accessory will not accommodate connectors using 8, 4, and 0 contacts.
Ⓐ 7. C Max is the maximum envelope dimensions of the strain relief.

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Ⓐ Dimensions and configuration: See figure 1 and table I.

Interface dimensions shall conform to MIL-C-38999, series I and II.

No part of strain relief arm shall extend beyond C maximum.

Material:

Accessory nut and follower: Aluminum alloy in accordance with MIL-C-85049.
Tie mount: Polyamide (optional).
Fastener: Stainless steel (optional).

Ⓐ Finish: A, N, W. 1/

Ⓐ TABLE I. Shell size and dimensions.

Dash number (accessory shell size)	Fits connector shell size Series II	Fits connector shell size Series I	B maximum	C diameter maximum	D maximum	Maximum wire bundle accommodated	E maximum
08	8	9	.54	.86	1.09	.264	.90
10	10	11	.54	.98	1.09	.392	.90
12	12	13	.54	1.16	1.15	.506	.96
14	14	15	.54	1.28	1.33	.631	1.14
16	16	17	.54	1.41	1.33	.756	1.14
18	18	19	.54	1.52	1.39	.844	1.20
20	20	21	.54	1.64	1.52	.970	1.33
22	22	23	.54	1.77	1.54	1.094	1.45
24	24	25	.54	1.89	1.78	1.219	1.59

Ⓐ Part number: See example below:

M85049/ 56 -10 W

Military designator
Specification sheet
Dash number (accessory shell size)(see table I)
Finish

Ⓐ Qualification: Accessory shall be tested with MIL-C-38999 series I connectors.

See MIL-C-85049, category 4C, cable pullout not applicable.

Ⓐ QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

1/ A finish inactive for new design. N finish not for Navy use; Air Force use for space applications only. W is the prefered finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Ⓐ **Supersession data:**

MS27668 * * R — M85049/56 - * *

Dash number

Finish

Old	New
B	W
C	A
F	N

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3377-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.