
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, DUMMY CONTACT, SIZES 12 AND 8, CATEGORY 7 (FOR MIL-C-38999 CONNECTORS)

This specification is approved for use within the 2750 Air Base Wing, Electronic Support Division (2750 ABW/ES), Gentile AFS, OH 45444-4500, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

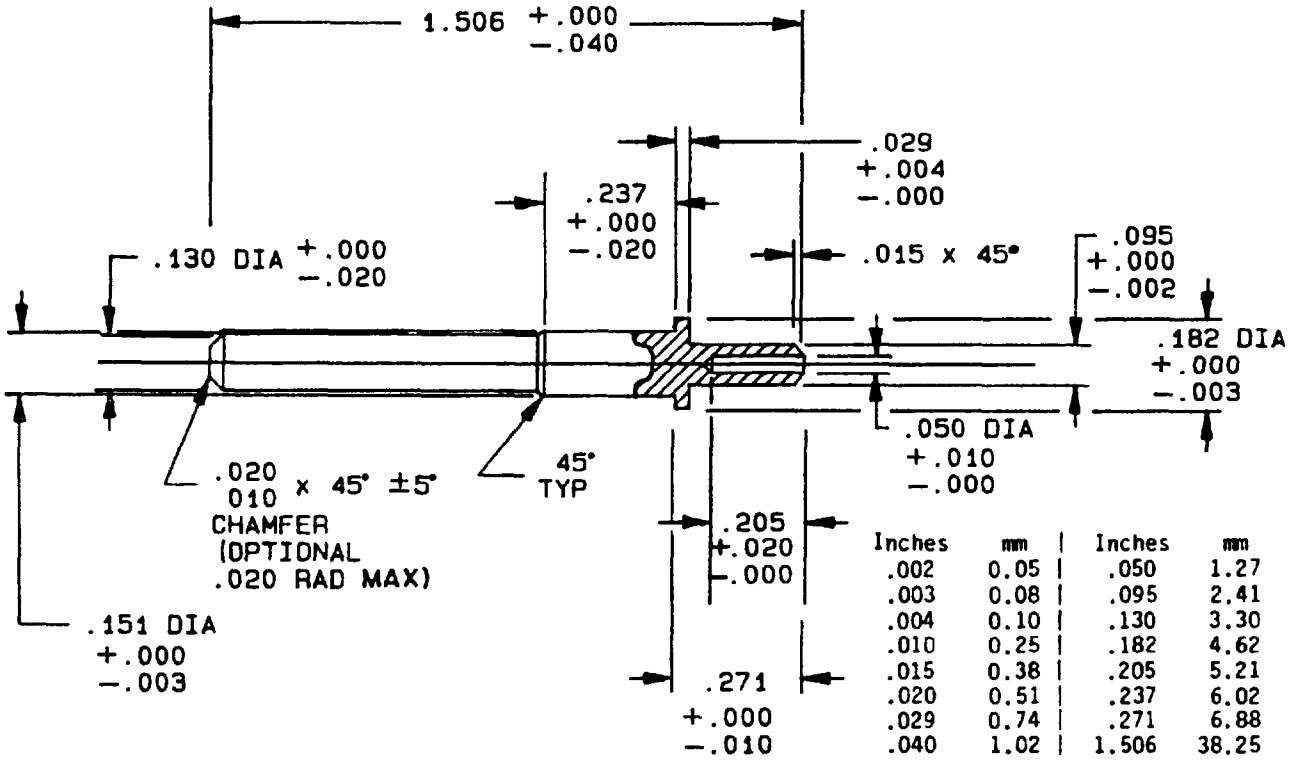


Inches	mm	Inches	mm
.002	0.05	.050	1.27
.003	0.08	.095	2.41
.004	0.10	.130	3.30
.010	0.25	.182	4.62
.015	0.38	.205	5.21
.020	0.51	.237	6.02
.029	0.74	.271	6.88
.040	1.02	1.506	38.25

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3 Break all sharp edges
4. Dummy contact shall be free of flash and burrs.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

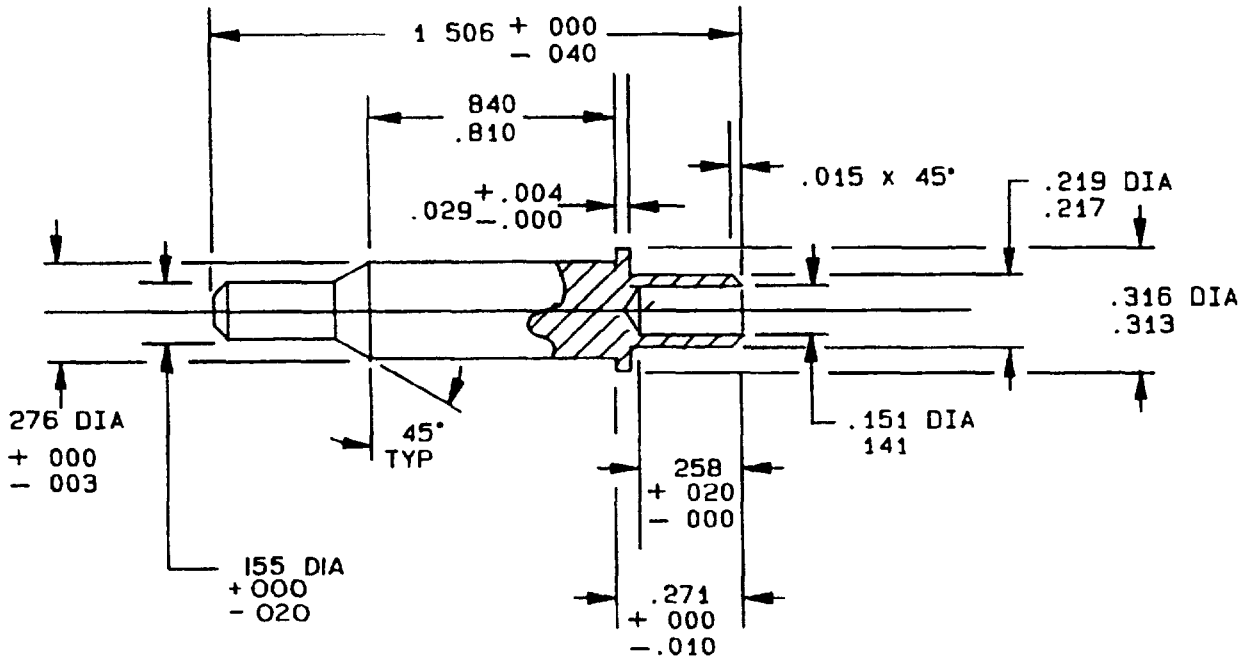

Inches	mm	Inches	mm
.003	0.08	.217	5.56
.004	0.10	.219	5.56
.010	0.25	.258	4.62
.015	0.38	.271	6.88
.020	0 51	.276	7.01
.029	0.74	.313	7.95
.040	1.02	.316	8.03
.141	3.58	.810	20.57
.151	3.84	.840	21.34
.155	3.94	1.506	38.25

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Break all sharp edges.
4. Dummy contact shall be free of flash and burrs.

FIGURE 2 Dimensions and configuration for size 8 contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction.

Dimensions and configuration: Shall be in accordance with figure 1 for size 12 and figure 2 for size 8.

Materials:

Plastic rod, molded, and extruded: Temperature limit 200°C minimum.
Polytetrafluoroethylene per MIL-P-19468.
Fluorinated ethylene propylene (FEP).
Perfluoroalkoxy (PFA).

Color:

Size 12: Yellow, color to be in accordance with EIA RS359.
Size 8: Red, color to be in accordance with EIA RS359.

Insulation resistance: Shall be 100 megohms minimum at 500 V dc when tested in accordance with MIL-STD-1344, method 3003 using flat probes placed on opposite ends of the dummy contact.

Tools:

Gauge size	Installing tools	Removal tools
Size 12	M81969/14-04	M81969/14-04
Size 8	M81969/14-06	M81969/14-06

Part or Identifying Number (PIN): See example below:

M85049/ 80 -12

Military designator

Specification sheet

Dash number (-12 for size 12 and -8 for size 8)

Application:

-12 is for use in MIL-C-38999, series I, III, or IV connectors in size 12 contact cavities.

-8 is for use in MIL-C-38999, series I, III, or IV connectors in size 8 cavities

The -12 and -8 dummy contacts are to be used in lieu of contacts and sealing plugs in unwired contact cavities for both pin and socket inserts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Qualification: See MIL-C-85049, category 7.

Examination of product is the only applicable test

QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-F338-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.