

MILITARY SPECIFICATION SHEET

CONNECTOR, ACCESSORIES, COMPOSITE, ELECTRICAL, STRAIN RELIEF, 90°, SELF-LOCKING, CATEGORY 4C
(FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-85049

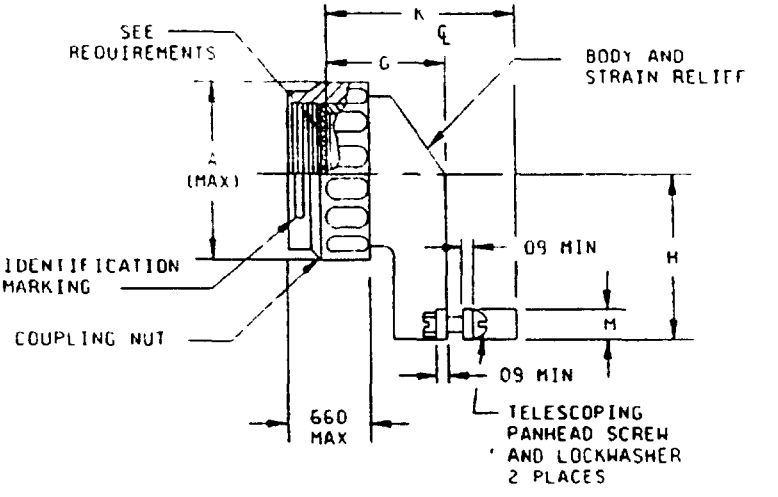

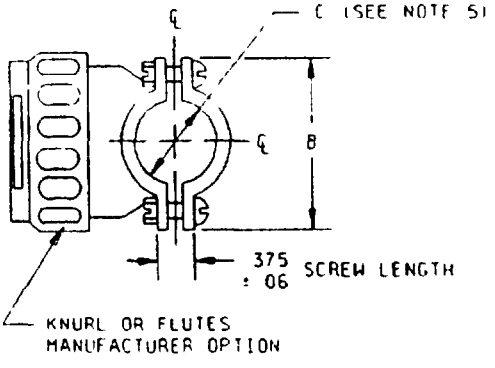

Inch	mm
06	1 52
09	2 29
375	9 53
660	16 7

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

Shell sizes and dimensions

Shell size	A max dia	B max	C ± 031 dia see note 4	H ± 062	K max	M ± 03	Screw size	G ± 062
9	858 (21 79)	980 (24 89)	219 (5 56)	875 (22 23)	1 06 (26 92)	375 (9 53)	4-40	769 (19 53)
11	984 (24 99)	1 05 (26 67)	264 (6 71)	937 (23 80)	1 10 (27 94)	375 (9 53)	4-40	792 (20 12)
13	1 157 (29 39)	1 20 (30 48)	344 (8 74)	1 031 (26 19)	1 18 (29 97)	406 (10 31)	6-32	847 (21 51)
15	1 280 (32 51)	1 30 (33 02)	460 (11 68)	1 125 (28 58)	1 30 (33 02)	406 (10 31)	6-32	890 (22 61)
17	1 406 (35 71)	1 42 (36 07)	>45 (13 84)	1 312 (33 32)	1 38 (35 05)	406 (10 31)	6-32	941 (23 90)
19	1.516 (38 51)	1 52 (38 61)	615 (15 62)	1 375 (34 93)	1 45 (36 83)	406 (10 31)	6-32	972 (24 69)
21	1 642 (41 51)	1 64 (41 66)	698 (17 73)	1 500 (38 10)	1 54 (39 12)	406 (10 31)	6-32	1 009 (25 63)
23	1 768 (44 91)	1 77 (44 96)	780 (19 81)	1 625 (41 28)	1 62 (41 15)	406 (10 31)	6-32	1 050 (26 67)
25	1 890 (48 01)	1 89 (48 01)	850 (21 59)	1 750 (44 45)	1 69 (42 93)	406 (10 31)	6-32	1 085 (44 45)

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Millimeters are in parentheses
4. Dimensions apply after plating
5. Cable entry is measured with saddle bars closed and bottomed on clamp ears

FIGURE 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Interface dimensions In accordance with MIL-C-85049, figure 3

Accessory Consist of a coupling nut, clamp strain relief, and saddle bar The coupling nut shall be captivated to the clamp and is free to rotate Accessories will not accommodate connectors using size 8, 4, or 0 contacts

Clamp shall have no protrusions or sharp edges which may pinch cable

Material and finish In accordance with MIL-C-85049 with table I herein

Telescoping screws and lockwashers 300 series corrosion-resistant steel, passivate

TABLE I Material and finish

Figure	Material	Finish
1	Composite (conductive)	J - Cadmium olive drab M - Electroless nickel
1	Composite (nonconductive)	T - Composite material without plating

Vibration Backshells shall be subjected to test parameters of applicable connector specifications The coupling torque shall be within ±20, -10 inch-pounds of the initial value

Additional tests for finishes J, M, and T shall be as follows

Ozone exposure Backshells shell be tested in accordance with MIL-STD-1344, method 1007

Sample Each sample shall consist of one backshell

Sample preparation Not applicable

Failure Blistering or pealing of the plating constitutes a failure An condition which adversely affect the function of the backshell also constitutes a failure

Fluid immersion Accessories shall be tested in accordance with MIL-C-85049 After immersion the accessories shall meet the coupling strength requirements of MIL-C-85049

Part or Identifying Number (PIN) example

M85049/ 92 - 09 M

Military designator

Specification sheet number

Shell size

Finish

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

Qualification. The connectors accessories shall meet the qualification requirements in accordance with MIL-C-85049, category 4C Finish T shall be tested in accordance with requirements of finish M, except plating evaluation criteria is not applicable

QPL evaluating activity Naval Air Warfare Center, Code DP704N/MS-60, 6000 East 21st Street, Indianapolis, IN 46219-2189

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity.
Air Force - 85

Agent
DLA - ES

(Project 5935-3826)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.