
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, TERMINATION, SHIELD, SPLIT SUPPORT RING, COMPOSITE, NONENVIRONMENTAL, STRAIGHT, CATEGORY 7

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-85049.

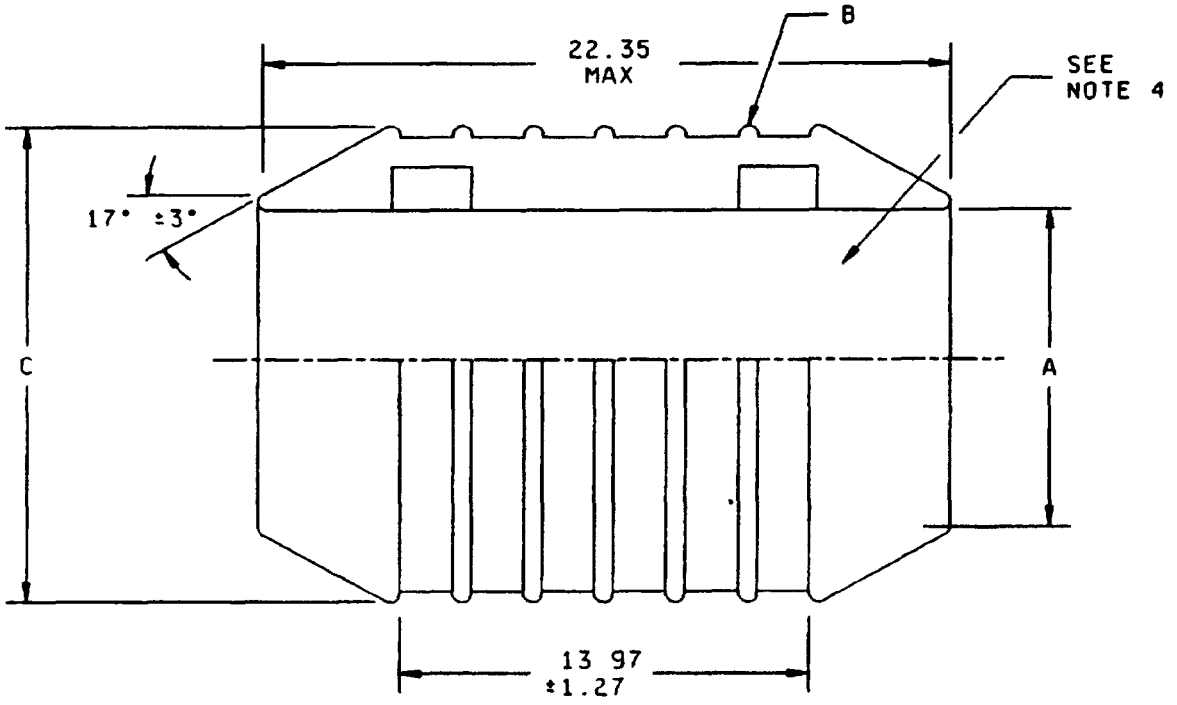

mm	Inches
1 27	050
13 97	550
22 35	.880

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

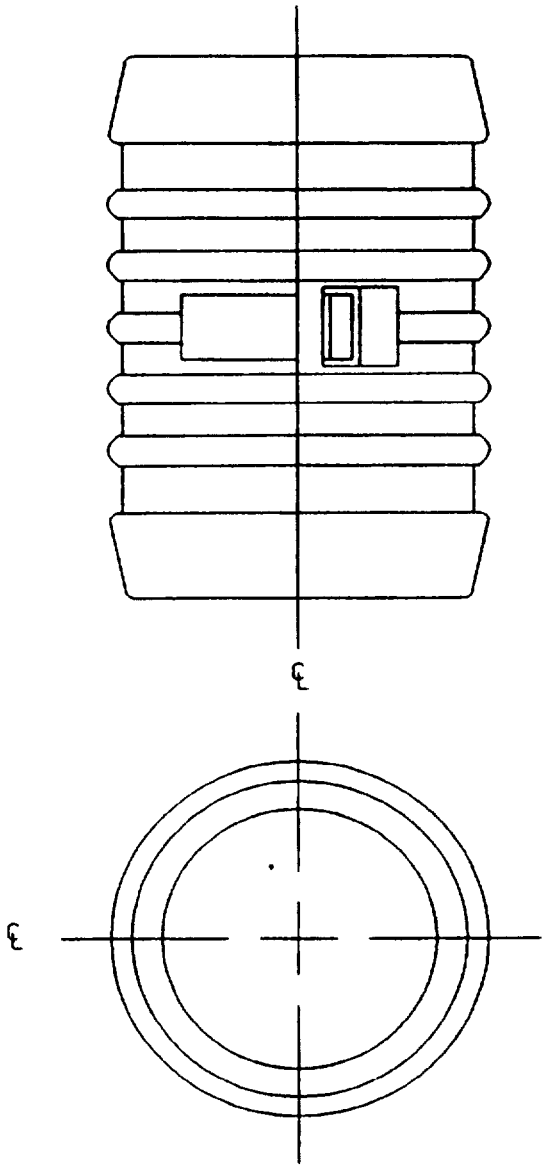


FIGURE 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

Dash number	A ±0 254 dia (0100)	B ±0.762 dia (.0300)	C ±0.254 dia (0100)
04	6 35 (250)	9.14 (360)	10.26 (404)
06	9 52 (375)	12.32 (485)	13.44 (.529)
08	12 70 (500)	15 49 (.610)	16.61 (.654)
10	15 88 (.625)	18 67 (.735)	19.79 (.779)
12	19.05 (750)	21.84 (.860)	22 96 (904)
14	22 22 (875)	25 02 (985)	26.14 (1 029)
16	25 40 (1 000)	28 19 (1 110)	29.31 (1 154)
18	28 58 (1 125)	31.37 (1.235)	32 49 (1.279)
20	31 75 (1 250)	34 54 (1 360)	35.66 (1 404)
22	34.92 (1 375)	37 72 (1 485)	38 84 (1.529)
24	38 10 (1 500)	40 89 (1.610)	42.01 (1 654)
26	41 28 (1 625)	44.07 (1.735)	45 19 (1.779)
28	44 45 (1 750)	47 24 (1.860)	48 36 (1 904)

NOTES
1. Dimensions are in millimeters
2. Inch-pound equivalents are given for information only
3. Inch-pound equivalents are in parentheses
4. Interior features are shown for pictorial representation only, their dimensions or actual numb of places used thereon are not controlled in so far as all performance requirements are met

FIGURE 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration Shall be in accordance with figure 1

Figure 1 consists of two split ring halves The split ring construction shall have identical, interchangeable halves which snap together manually and retain themselves about a cable or cable harness without disengaging

The individual or overall wire or cable shielding shall be retained about the split ring using the appropriate band shield termination

The split ring shall be constructed such that after termination of the individual or overall wire or cable shielding there shall be no slippage as a result of the split ring construction

Material

Composite, nonconductive, corrosion resistant in accordance with MIL-C-85049 Color is natural

Marking In accordance with MIL-STD-1285 and as follows

Part or Identifying Number (PIN)

M85049/ 93 - 14

Military designator

Specification sheet

Dash number

Qualification See MIL-C-85049, category 7, with the following additions

a Salt spray (corrosion) Material shall be subjected for a duration of 2,000 hours Material shall show no corrosion which could affect the performance Test method in accordance with MIL-C-85049

Sample The sample should be joined together for the salt spray test

b Temperature cycling In accordance with MIL-C-85049

Sample The sample should be joined together for the temperature test

c Split ring retention Device shall withstand a perpendicular pull force of 2 pounds for 5 minutes without the retention device disengaging

d Each sample must withstand 3 band terminations using any tool/band system capable of installing a band with a minimum 140 pound pull force

e Qualification test specimens Test specimens shall consist of two samples from each diameter range (see table I)

OPL evaluating activity Naval Air Warfare Center (code DP704N), 6000 E 21st St , mail stop 60, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I Test sample size

Size	Dash number	Diameter (mm)
Small	04	6 35
	06	9 52
	08	12 70
	10	15 88
Medium	12	19 05
	14	22 22
	16	25 40
	18	28.58
Large	20	31 75
	22	34 92
	24	38 10
	26	41 28
	28	44 45

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

User activities
Army -
Navy -
Air Force -

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3908)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.