GG-C-00129a (DSA-DM)
10 February 1967
Interim Revision of
Fed. Spec. GG-C-129
August 20, 1956

INTERIM FEDERAL SPECIFICATION

CART, CLINICAL CHART HOLDER

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pennsylvania 19101, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Service Administration has authorized the use of this interim Federal specification as a valid exception to Federal Specification GG-C-129.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the following sizes of chart-holder carts constructed of corrosion-resistant steel; and mounted on casters. Carts shall be suitable for accommodating aluminum clinical chart holders as described in Federal Specification GG-H-555.

1.2 Classification.

1.2.1 Sizes. Carts shall be of the following sizes as specified in the invitation for bids.

Size 1. - Capacity 45 Chart Holders

Size 2. - Capacity 30 Chart Holders

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOUCMENTS.

2.1 Specifications, standards and drawings. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-C-86	Casters; Truck, Medium Duty.
GG-H-555	Holders, Clinical Chart.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof, or Waterproof, Flexible.

STANDARDS

Federal

Fed Std No. 66 Steel; Chemical Composition and Hardenability.
Fed Test Method Std No. 151 Metals, Test Methods.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D.C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

(Copies of Military specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First Article. Unless otherwise specified, prior to the start of production of the contract quantity, one sample of the cart shall be assembled, completely finished, and tested by the contractor. The sample shall be submitted, together with the contractor's inspection and test reports, to the procuring contracting officer for examination and testing to determine compliance with the requirements of this specification. Written approval of the materials, construction, and performance of the sample shall be obtained from the procuring contracting officer, or his authorized representative, prior to the manufacture and assembly of the remaining quantity to be manufactured. Pending approval of the first article, acquisition of materials, components, or commencement of production is at the sole risk of the contractor. Accepted sample shall become the property of the procuring activity and shall be included in the quantity called for in the contract or order. In the event that the sample is not approved, the contractor shall submit a new sample for approval, or modify the existent sample so as to remove the deficiencies cited.

3.2 Material.

3.2.1 Steel, corrosion-resisting. Steel shall conform to Federal Standard No. 66, AISI 304. Thickness specified herein is minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.


3.2.2 Rubber bumper. The rubber compound used in the bumper form specified shall be free from any significant quantities of carbon filler or from any other admixture that would visibly mar, streak, or discolor, ordinary hospital side-walls by transference on contact therewith during normal operation. It shall be of the rubber compound type known commercially as "Non Marking", in gray color, with a Shore Durometer hardness of 50 to 70, and a quality free from any reclaimed rubber formulations. The rubber bumpers furnished under this specification are not required to be electrically conductive.

3.3 Design and construction. Design and construction of the carts shall be as shown in figure 1, and as hereinafter specified.

3.3.1 Chart holder. Chart holder carts shall be of corrosion-resisting steel, cabinet type, mounted on casters. The carts shall have 3 rows of racks for size 1, and 2 rows of racks for size 2 carts. The racks shall be for holding chart-holders, and shall be located at such an angle that names on chart holders are visible from a sitting position. Carts shall have a capacity as specified in 1.2.1 and shall be provided with a drawer and drop-type writing shelf. Construction for size 1 cart shall be in conformance with figure 1. Size 2 cart shall be similar in general design, modified as specified below to have a smaller capacity of chart holders.

3.3.2 Welding. Chart-holders carts shall be welded throughout, and shall be sound, well-fused and free from blisters or blowholes developing strength equal to the part welded. Welding rod shall be of similar chemical composition to part welded. All welds shall be cleaned and free from twists or strains, and all exposed welds shall be ground smooth to eliminate pitmarks and seams, and shall be polished to blend with the color of the adjacent surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

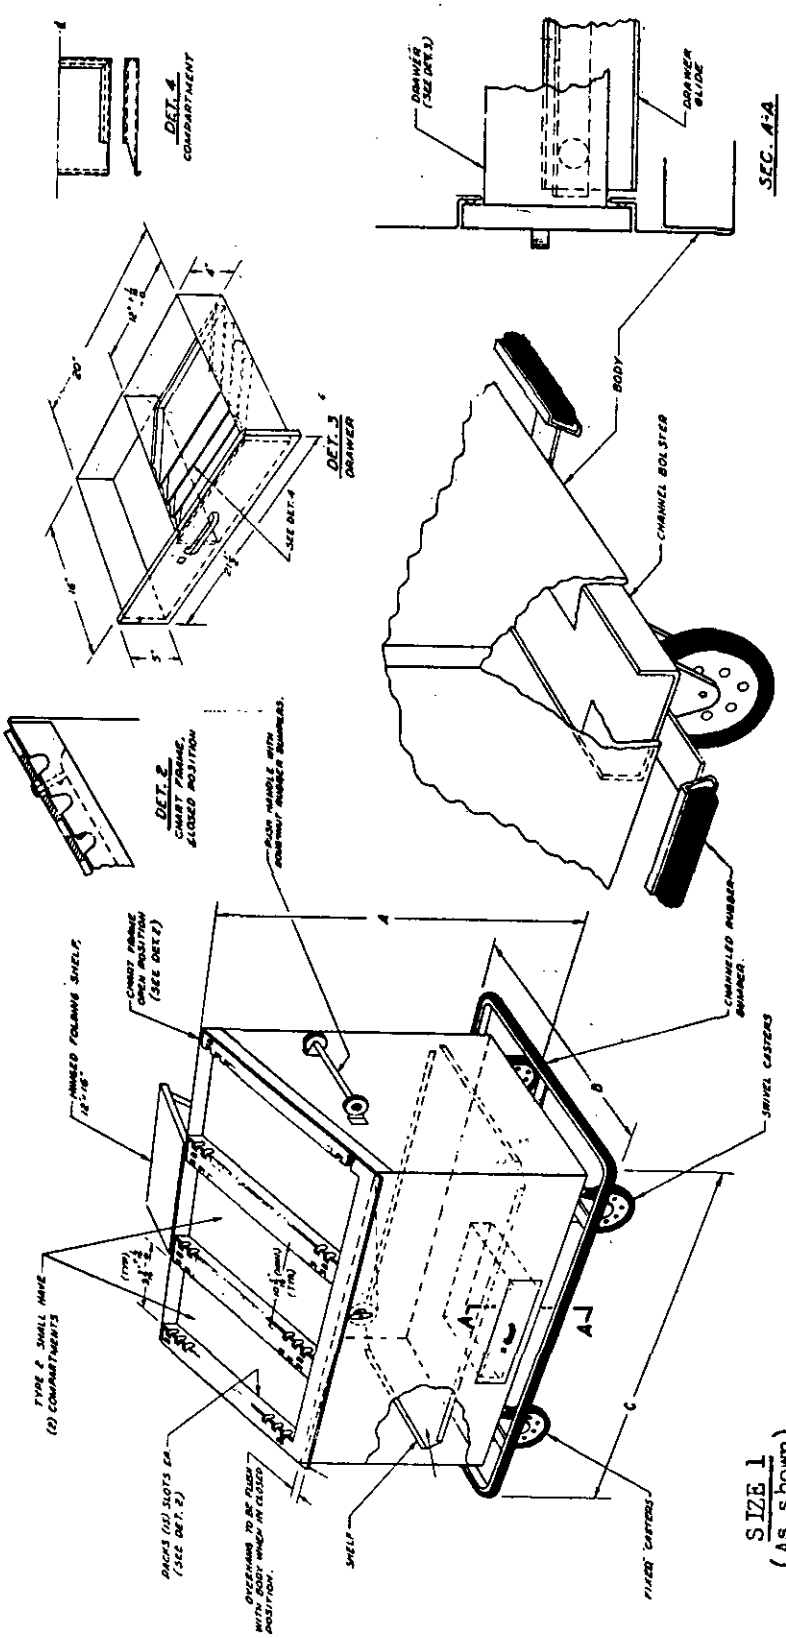

SIZE 1
(As shown)

Note: Size 2, Similar In General Design Except As Noted Above

SIZE	A	B	C	CAPACITY
	Inches	Inches	Inches	
1	45	25	44	45 Charts
2	45	25	33	30 Charts

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

3.3.3 Size. Carts shall be of the following dimensions:

Size 1 cart:

	Length	Width	Height, rear
Body - - - -	34 1/2 inches	20 inches	45 inches
Overall - - -	44 inches	25 inches	

Size 2 cart:

	Length	Width	Height, rear
Body - - - -	23 1/2 inches	20 inches	45 inches
Overall - - -	33 inches	25 inches	

3.3.4 Body. The front, back, and sides of the cart shall be constructed of not less than 0.0375-inch-thick No. 20 United States Standard (No. 20 U.S.S. gage) corrosion-resisting steel. The ends of the front and back shall have a vertical right-angle flange fitting into an offset recess on the side panels to form a smooth joint. Panels shall be electrically welded together 2 inches on centers. The top edge of the two side panels shall be concealed under the chart racks. The bottom edges of the front, back, and sides, shall be formed as shown on detail 1 of figure 1. The top edge of the front and back panel shall be hemmed or flanged. A channel formed of 0.037-inch-thick(No. 20 U.S.S. gage)corrosion-resisting steel shall be spot-welded across the full length of the inside of the back for reinforcing the body where the folding shelf bracket is mounted. The channel shall be hat-shaped in section, the web being 3 inches long minimum, the channel flanges 1/2 inch, and the mounting flanges of sufficient length to span the shelf-bracket attaching bolts. Flanges of channel shall span shelf bracket to reinforce shelf. The body shall be fitted with an inner full-length, full-width shelf with turned up flanges on back and sides electrically welded 2 inches on front centers all around the inside of the body. The shelf shall be 0.0375(inch No. 20 U.S.S. gage) thick with cutout corners. It shall be suitable for preventing loss of papers inadvertently dropped from holders. Vertical body seams adjacent to push handles shall be closely spot-welded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

3.3.5 Drawer. A drawer shall be located in the center of the cart directly below the inner shelf. The drawer shall be made of 0.0375 inch (No. 20 U.S.S. gage) corrosion-resisting steel, having measurements of 20 inches long by 16 inches deep by 4 inches ± 1/16 inch high, and have a double walled, sound deadened front measuring 21-1/2 inches long by 5 inches high ± 1/16 inch. Drawer shall be compartmented in conformance with the drawing and shall be equipped with racks for holding blank forms, for charts. Drawer front shall be fitted with a self-closing thumb latch to prevent its rolling open when the cart is in use and shall have a metal chromium-plated handle. Drawer shall travel on suspension channels with built-in ball bearings. Angles 5/16 inch high by 1 inch wide by 0.062 inch thick (No. 16 U.S.S. gage) shall be welded to the return of the bottom front and back. The angle shall extend the full width of the drawer opening. To these angles shall be welded the drawer slide channels, one on each side. These channels shall be formed 0.078 inch thick (No. 14 U.S.S. gage) sheet or strip, measuring 2-1/4 inches high. A 15/16 inch diameter corrosion-resisting steel ball-bearing sheave with a 5/16 inch nylon face shall be secured to the front of each channel. Behind the ball-bearing sheave there shall be a track (an intergral part of the slide) 3/8 inch wide by 3/8 inch high, under which the ball-bearing sheave of the drawer shall ride. A companion drawer slide, formed into a "Z" shape of 0.078 inch thick (No. 14 U.S.S.) gage sheet or strip, shall be welded to each side of the drawer body. The drawer front shall close against rubber bumpers and shall be flush with the frame of the cart resting in rabbets formed integrally with the cart front, along the top and bottom of the drawer opening. The sides of the drawer openings shall have sheet angles, approximately 3/4 inch by 1/2 inch, welded on the inside of the body front and flush with the edges of the opening. The angles shall be corrosion-resisting steel not less than 0.037 inch thick. The leg extending laterally inward from the front of the cart shall be hemmed and shall extend back to, and be tack-welded to, the top and bottom rabbets. The crevice between the angle and the edge of the opening shall be eliminated by welding and/or flow-soldering and grinding. The thumb latch shall be located to the left of the drawer handle and shall be so designed that movement of the latch to the right will release the drawer. The drawer body shall be formed of a single sheet with the top edge of the back and sides flanged out not less than 1/2 inch and down not less than 3/8 inch. The top edge of the front of the drawer body shall have an offset recess.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

The drawer front shall be not less than 3/4 inch thick, and shall be formed of one piece. The top flanged-down edge of the drawer front shall fit into the offset recess inside the top front edge of the drawer body. The sides and bottom of the drawer front shall be flanged out 90° for not less than 3/4 inch and spot welded to the sides and bottom of the drawer body. The drawer shall be provided with heavy metal stops to prevent inadvertent withdrawal of the drawer from the cart. The drawer shall close against the rubber bumpers, and shall be flush with the front of the cart.

3.3.6 Chassis. Body shall be continuously welded or tack-welded to corrosion-resisting bolster channels 0.078 inch thick, located to support the body, the bumper assembly, and to provide a mounting for the flat plate casters. Construction shall result in a sturdy, rigid assembly. Tack welding shall provide sufficient welds to hold the bolsters and body firmly.

3.3.7 Bumper. The cart shall be provided with a continuous non-marking rubber bumper (see 3.2.2) at the base fastened by means of screws through a metal insert inside the rubber to a one-piece 1-1/4 by 1/2 by 0.109 inch corrosion-resisting steel channel surrounding the entire cart connected by means of 2 by 3/16 inch spacers welded or bolted to the channel and to the chassis bolster channels. As an alternate, a "C" shaped channel shall be furnished into which a formed rubber bumper is snap inserted. The rubber bumper shall be securely held in place by the flanges of the channel. The exposed surfaces of the rubber shall be rounded.

3.3.8 Push handle. Push handle shall be one-inch outside diameter by 0.065 wall No. 16 Birmingham Wire (No. 16 BW gage) corrosion resisting steel tubing welded to 0.078 inch thick (No. 14 U.S.S. gage) corrosion resisting steel formed brackets, fitted with doughnut shaped nonmarking rubber bumpers. Push handle shall be securely fastened to swivel end of the cart. Push handle shall be not less than 10 inches long, excluding bumpers, and shall be attached to cart where push handle is attached to cart body at a height of 30 ± 1/4 inches from the floor. Body of cart where push handle is attached, shall be reinforced on the inside with a corrosion-resisting steel sheet not less than 0.109 inch (No. 12 BW gage) thick which shall span the attaching bolts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

3.3.9 Casters. The cart shall be mounted on two swivel and two non-swivel casters. Casters shall be type I or type II, as applicable, size 8, style 3, mounting P, conforming to FF-C-86. Metal parts of the casters shall be carbon steel, nickel zinc, or cadmium plated.

3.3.10 Shelf. A drop-type writing shelf 16 inches long by 12 ± 1/8 inches wide formed of 0.037 inch (No. 20 U.S.S. gage) corrosion-resisting steel, shall be mounted on the back of the case, level with the top, midway between the ends. All edges of the shelf shall be turned down not less than one inch and hemmed, corners rounded, welded, and ground and polished to blend with adjacent surfaces. Shelf shall be hinged at cart side and supported by two hinged, folding, self locking, corrosion-resisting steel brackets having arms not more than 8 inches long. Shelf shall close to not more than 1-1/2 inch width overall in the down position.

3.4 Racks.

3.4.1 Size 1 cart. The top of the chart shall consist of racks located at approximately a 40-degree angle to hold three rows of 15 chart holders in visible formation. Four racks of cast aluminum or suitable alloy, equally spaced and slotted to receive the chart holders, shall be securely fastened to the top of the carrier body. All racks shall have 15 equally spaced 3/4 inch wide by 3/4 inch deep wells in top for suspending book-form hinged chart holders in a vertical position. A minus tolerance of 1/8 inch will be permitted in dimensions of wells. Intermediate racks shall have these wells at each side and end racks shall have wells on one side only. Wells at side may run through entire width of end casting.

3.4.2 Size 2 carts. The top of the cart shall consist of racks located at approximately a 40 degree angle to hold two rows of 15 chart holders in visible formation. Three racks of cast aluminum or suitable alloy, equally spaced and slotted to receive the chart holders, shall be securely fastened to the top of the carrier body. All racks shall have 15 equally spaced 3/4 inch wide by 3/4 inch deep wells in top for suspending bookform hinged chart holders in a vertical position. A minus tolerance of 1/8 inch will be permitted in dimensions of wells. Intermediate rack shall have these wells at each side, and end racks shall have wells on one side only. Wells at side may run through entire width of end casting.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

3.4.3 Chart frame. A one-piece welded frame, 0.109 inch thick, shall cover these racks and the edge of the cart. This frame shall be movable laterally and notched out so that when it is in the down position, the slots shall line up vertically with the wells in the racks and the chart holders shall be readily removable. When the frame is in the up position, the soild portions of the frame shall cover the well openings, closing them to prevent removal of the charts. The frame shall be held close to the racks, and guided in its movement over the racks by at least three corrosion-resisting steel studs extending through elongated holes or slots in the frame. The studs shall extend through the racks and be fastened securely below. The chart frame lock mechanism shall be so designed as to preclude opening the frame, except by unlocking frame with key, without actually destroying the frame or lock. The frames shall be readily removable and this movement controlled by a two-way key-in handle chromium-plated lock. The lock handle shall operate a disc level driving rods attached to cams operating against ball or needle bearing rollers so as to readily drive the frame up or down, opening or closing the rack slots without lifting or pushing the frame. The mechanism shall be designed to lock the frame in the up or closed slot position. As an alternate design, the rack slots may be closed by locking bars which are actuated by one two-way key-in handle chromium-plated lock, located at one side of the cart, the locking bars so confined and controlled that rotation of the lock handle in one direction closes all of the slots and locks them closed, and rotation in the opposite direction opens the slots and locks them open.

3.4.4 Holder, clinical chart. Unless otherwise specified, carts shall be supplied without clinical chart holders. However, carts shall be constructed to accommodate chart holders as described in GG-H-555.

3.5 Finish. All exterior corrosion-resisting steel surfaces shall be free from pitmarks and scale. All corrosion-resisting steel surfaces that are or may be exposed in normal use of the cart shall be finished in No. 4 commercial finish. All welds shall be cleaned and ground, and exterior welds shall be polished to match the surrounding surfaces. Wheels shall be cadmium plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

3.6 Identification marking. Each cart shall be permanently and legibly marked with the name or registered trademark of the manufacturer, stock number, contract, or purchase order number, and the letters "U.S.".

3.7 Workmanship. Workmanship shall be first class throughout. The finished units shall be clean, well-made, and free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier shall utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to insure that supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling. Sampling for examination shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	II	1.0
Total (major and minor combined)	II	4.0

4.2.1 For tests. Sampling for tests shall be conducted in accordance with Inspection level S-3 of MIL-STD-105. The acceptance level shall be zero.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

4.3 Examination. The carts shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Categories and defects*

Major	
101	Any component part missing, broken, or otherwise unusable.
102	Assembled unit not rigid and free moving on its casters.
103	Folding shelf not smooth and free moving; and rigid.
104	Drawer binds: tracks not paralled.
105	Chart frame not free moving; mechanism faulty; construction does not accomodate specified chart holders.
106	Shelf not sufficiently rigid, and smooth.
Minor	
201	Identification marking not present, complete, correct, legible, or permanent.
202	Drawer front not flush with frame when closed.
203	Drawer thumb latch faulty.
204	Welding not free from burns, pits, and poor finish.
205	Stainless steel not of required finish.
206	Finish not free of chipped areas, scratches or roughness.

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The carts shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.2 Unit of issue. One cart, as specified, constitutes one unit of issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Casters shall be removed. Casters and components shall be adequately protected and packaged in a carton of suitable design and packed within the unit. Drawer shall be closed and secured in position. All exterior finished surfaces shall be protected by wrapping with kraft peper and cushioning with flexible corrugated fiberboard or other suitable materials. Wrapping and cushioning material shall be secured by typing with cotton cord or tape, or by sealing with kraft gummed paper tape. Works shall be accomplished in such a manner as to insure against marring, scratching, or damage to the unit.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Each unit shall be packed into a exterior container conforming to PPP-B-601, table II, using type III, class 1 plywood; on PPP-B-621, table III. The unit shall be adequately secured within the exterior container by means of bolts, wood braces, or other interior fittings, to insure against shifting or breakage. Each unit shall be protected by a shroud, fabricated of waterproof barrier material. The exterior container shall include three skids of not less than 1-1/2 inches in thickness applied crosswise of base, so positioned as to facilitate handling with a fork-lift truck and to maintain unit in an upright position. Closure shall be in accordance with appendix of applicable box specification. Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 The subject commodity shall be packaged in substantial commercial containers of the type, size, and kind commonly used for thepurpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Interior packages shall be marked to identify its contents.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. For accommodating aluminum clinical chart holders, for mobile use in hospitals.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) When First Article is not required (See 3.1).
(c) Where First Article shall be sent (See 3.1).
(d) Selection of applicable levels of packing (See 5.1 and 5.2).

6.3 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-516/4379

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

Fold

DPSC FORM 2418
AUG 66

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements .

SPECIFICATION

GG-C-00129a (DSA-DM)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.