GG–C–126a
9 OCTOBER 1952
SUPERSEDING
Int. Fed. Spec. GG–C–126 (GSA–FSS)
14 November 1951

FEDERAL SPECIFICATION

CARRIAGE, PAIL, CRM (FRAME, KICK BUCKET)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.**—Pail carriage (kick bucket frame) covered by this specification is a one-piece corrosion-resisting steel frame, mounted on casters, suitable for use with standard 12-quart pails.

1.2 **Classification.**

1.2.1 *Type, grade, and size.*—Pail carriage, covered by this specification shall be of one type, one grade, and one size (see fig. 1).

2. APPLICABLE SPECIFICATIONS AND OTHER PUBLICATIONS

2.1 **Specifications.**—The following Federal Specifications of the issues in effect on date of invitation for bids, form a part of this specification:

QQ–S–766—Steel, Corrosion-Resisting; Plates, Sheets, Strips, and Structural Shapes.

RR–B–761—Buckets (Pails), Hospital; Corrosion-Resisting Steel.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks, and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

2.2 **Other publication.**—The following publication, of the issue in effect on date of invitation for bids, forms a part of this specification:

National Fire Protection Association Publication:

No. 56 Safe Practice for Hospital Operating Rooms.

(Copies of NFPA No. 56 may be obtained upon application to the National Fire Protection Association, 60 Batterymarch Street, Boston 10, Mass.)

2.3 **Specifications and standard applicable only to individual departments are listed in section 7.**

3. REQUIREMENTS

3.1 **Material.**—Material shall conform in all respects to the specifications listed in section 2 and as hereinafter specified.

3.1.1 *Corrosion-resisting steel.*—Corrosion-resisting steel shall conform to the requirements of Federal Specification QQ–S–766, class 1 or 2.

3.2 **Construction.**—Pail carriage (kick bucket frame) shall be a one-piece corrosion-resisting steel frame, mounted on casters provided with rubber bumpers inside and out, and suitable for use with 12-quart pails, as specified in Federal Specification RR–B–761, for operating room use. Design and dimensions shall conform to figure 1.

3.2.1 *Frame.*—The frame shall consist of two lengths of approximately 1¼ inches wide and not less than 0.109-inch-thick stock, joggled and spot welded together at right angles and formed into four vertical struts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

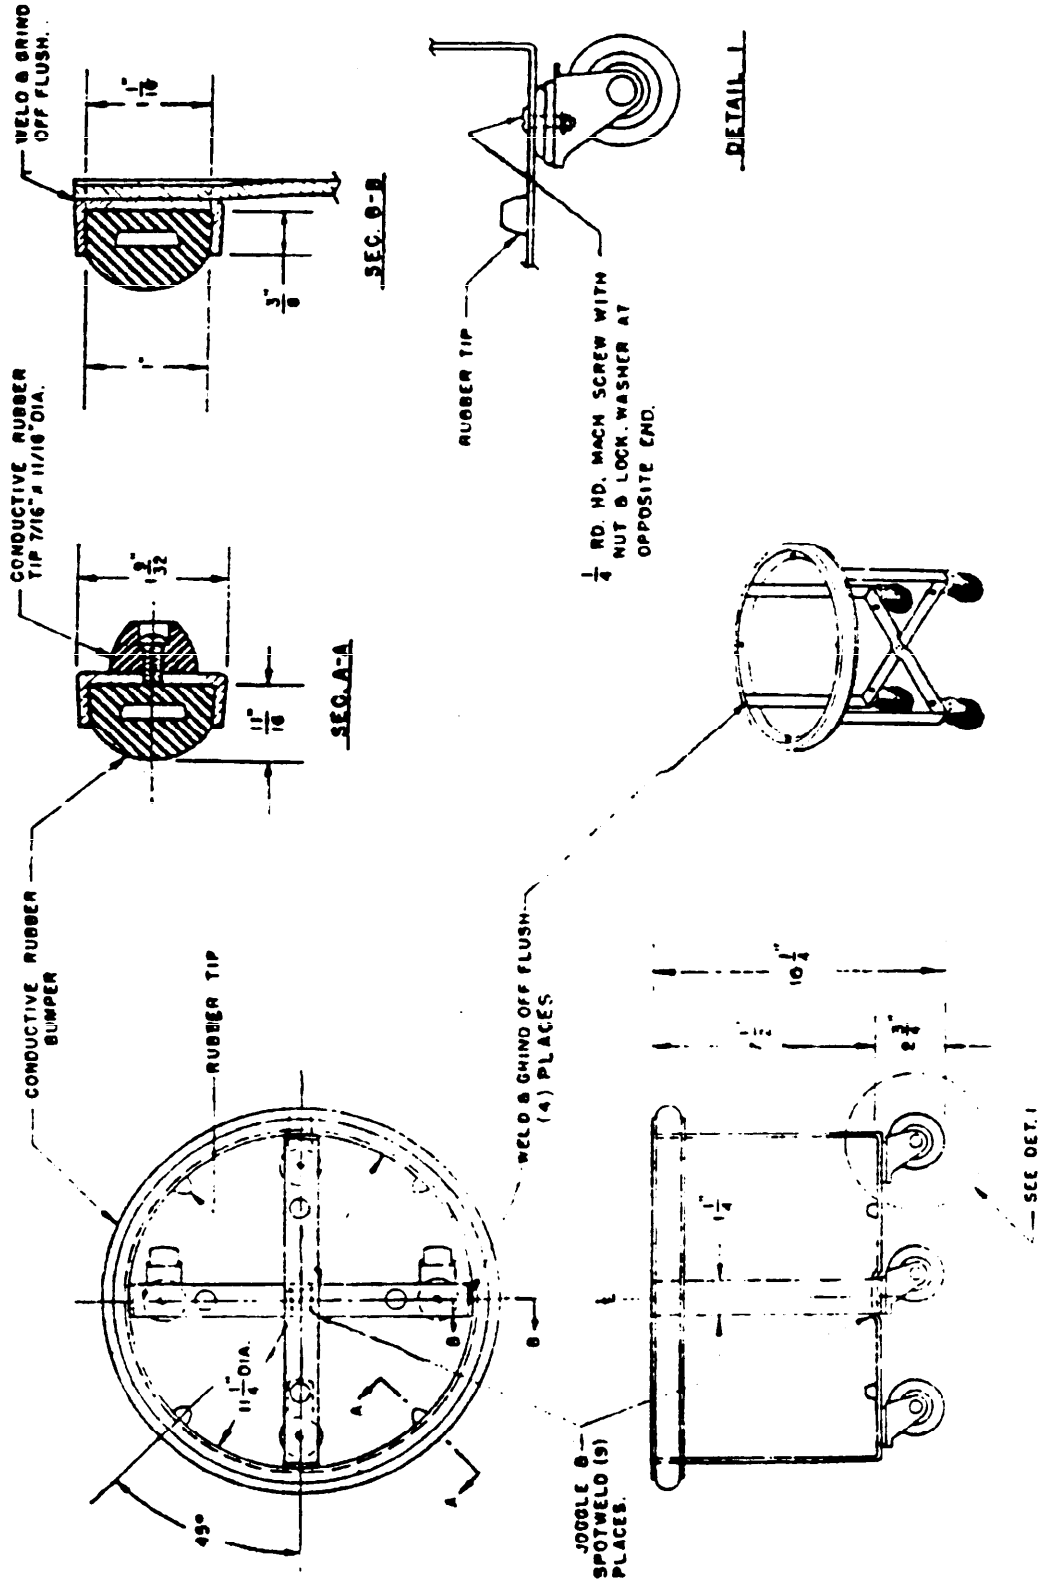


FIGURE 1.—*Pail carriage (kick bucket frame).*

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:49Z
Check the source to verify that this is the current version before use.

approximately 7½ inches high. The uprights shall be continuously welded at top to a continuous circular channel formed of strip not less than 0.109 inch thick, in which a continuous, electrically conductive rubber bumper shall be securely fastened. Not less than four electrically conductive rubber tips or bumpers shall be attached to the inside of the channel and one such bumper shall be attached near each end of the horizontal cross legs of the frame, so located as to provide a noiseless unit when in use. The unit shall be mobile and free moving for uses intended.

3.2.2 *Casters.*—The carriage shall be mounted on four top plate, ball-bearing swivel casters fitted with 2-inch diameter, electrically conductive rubber composition wheels. Casters shall have hollow kingpins and each shall be secured to the carriage with a corrosion-resisting steel ¼-inch screw, nut, and lock washer.

3.3 Welding.—The welding shall be continuous on all contact surfaces, using welding rod of composition similar to parent metal. Welds shall be thorough, nonporous, cleaned, ground, and finished smooth to match adjoining surfaces. Welds shall be free from pit marks and imperfections. All surfaces shall be free from sharp edges. Spot welds shall be free from surface burning, cracks and porosity, and shall be of sufficient strength to pull the spot out of the parent metal when pulled apart. Spot welds on exposed surfaces shall be filed or ground smooth to prevent unsightly blemishes on the finished surfaces.

3.4 Finish.

3.4.1 *Grinding.*—The entire inside and outside surfaces shall be finished with a No. 4 finish after all surface imperfections have been removed by previous grinding. This last grinding shall produce a uniformly finished surface with all imperfections and marks of previous grindings removed.

3.4.2 *Cleaning.*—As a final operation, the unit shall be thoroughly cleaned to remove foreign particles, such as dirt, flux, grease, graphite, metal, etc.

3.5 Identification marking.—Each carriage shall be marked with the manufacturer's name or registered trade-mark.

3.6 Electrical conductivity. — Electrical conductivity of bumpers and casters shall be such that the resistance between each bumper and a metallic plate placed under one caster shall not exceed 250,000 ohms when tested as described in 4.3.1.

3.7 Workmanship.—Carriage and casters shall be free from defects which affect their appearance or may impair the serviceability of the unit. It shall be free from rough grind marks, trimming or forming marks, pits, scales, or other defects or imperfections. Welds shall be continuous and ground smooth.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Sampling.—Unless otherwise specified, at least one carriage shall be taken at random from each 100 or fraction thereof delivered.

4.2 Inspection. — Samples shall be inspected for material, workmanship, finish, identification marking, construction, dimensions, cleanliness, welding, packaging, packing, and marking.

4.3 Tests.—Tests as required by the inspector to determine compliance with this specification shall be made by the inspector, or through him, at the factory or at any Government laboratory or other designated place.

4.3.1 *Conductivity.* — Test for electrical conductivity shall be in accordance with section 6 of the National Fire Protection Association Publication NFPA No. 56, Safe Practice for Hospital Operating Rooms.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Unless otherwise speci-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

fied, each carriage shall be packaged in accordance with accepted commercial practice.

5.2 **Packing.** — The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 **Marking.**

5.3.1 *Packages.*—Unless otherwise specified, packages shall be marked with the name and size of the commodity, the quantity contained therein, and the names of the manufacturer and contractor.

5.3.2 *Shipping containers.*—Unless otherwise specified, shipping containers shall be marked with the name and size of the commodity as defined by the contract or order under which the shipment is made, the quantity contained therein, the name of the contractor, the number of the contract or order, the name and address of the consignee, and the gross weight.

6. NOTES

6.1 **Ordering data.**—Purchasers should exercise any desired option offered herein. (See 4.1, 5.1, 5.3, 6.2, and 7.2.6.)

6.2 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.3 This specification covers the following item appearing in the Armed Services Catalog of Medical Matériel:

7–731–450—Frame, Kick Bucket, CRM.

6.4 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the type, etc., normally procured for Federal Government requirements.

6.5 **Transportation description.**

6.5.1 *Transportation description applicable to these items is:*

Trucks, not otherwise indexed by name, hand, with platforms and standing ends, sides, stakes or standards.
Loose or in packages.
Carload weight 24,000 pounds subject to Rule 34, Consolidated Freight Classification.
Truckload weight 24,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications, standard, and drawing, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 **Army, Navy, and Air Force.**

7.2.1 *Applicable specifications, standard, and drawing:*

Federal Specifications:

NN–B–601—Boxes, Wood-Cleated-Plywood, for Domestic Shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

NN-B-621—Boxes, Wood, Nailed and Lock-Corner.
NN-B-631—Boxes; Wood, Wirebound (for Domestic Shipment).
LLL-B-631—Boxes; Fiber Corrugated (for Domestic Shipment).
LLL-B-636—Boxes, Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.
MIL-B-107—Boxes, Wood, Wirebound (Overseas Type).
JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.
MIL-A-140—Adhesive, Water-Resistant, Waterproof Barrier-Material.

Navy Department Specification:

General Specifications for Inspection of Material.[1]

Military Standard:

MIL-STD-129—Marking of Shipments.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Packaging.*—One carriage constitutes one unit. Each unit shall be packed in a carton of appropriate size and design, conforming to the requirements of Federal Specification LLL-B-631 or LLL-B-636. Carton shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to, the contents. Each carton shall be adequately secured to prevent accidental opening.

[1] Applicable to Navy purchases only.

7.2.3 *Packing.*

7.2.3.1 *Domestic.*—Six unit cartons shall be packed in a shipping container conforming to the requirements of Federal Specification NN-B-601, NN-B-621, or NN-B-631.

7.2.3.2 *Overseas.*—Six unit cartons shall be packed in a shipping container designed for type 2 load and conforming to the requirements of Military Specification JAN-P-105, JAN-P-106, or MIL-B-107. Closure and strapping shall conform to the requirements of the appendix to the applicable box specification. Each shipping container shall be lined with a sealed waterproof bag, or its equivalent, made from material conforming to the requirements of Military Specification JAN-P-125, for case liners; seams and closures shall be completely sealed with a continuous seam at least ¾ inch wide of water-resistant adhesive conforming to the requirements of Military Specification MIL-A-140.

7.2.3.3 *Packing variation.*—If the number of units in any shipment is not the exact multiple of the number of units specified to be contained in each shipping container, the units not constituting the nearest such multiple shall be packed in a shipping container of suitable size and design and so constructed as to insure safe delivery to specified destination.

7.2.4 *Marking.*—Each unit carton and each shipping container shall be marked in accordance with Military Standard MIL-STD-129.

7.2.5 *Inspection procedures (Navy only).* The general inspection procedures shall be in accordance with Navy Department General Specifications for Inspection of Material.

7.2.6 *Ordering data.*—Procurement documents should specify whether the subject commodity is to be packed for domestic or overseas shipment (see 7.2.3).

NAVY INTEREST: Md

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEE
NAVY DEPARTM

OFFICIAL BUSINESS

Commander
Defense Personnel Support Center (Medical)
2800 South 20th Street
Philadelphia, Pa. 19101

FOLD

PLATE NO. 1541

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:49Z
Check the source to verify that this is the current version before use.