INCH-POUND

INACTIVE FOR NEW DESIGN

MIL-DTL-27434/13A
9 January 2003
Superseding
MIL-A-27434/13
28 September 1960

DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, TYPE UG–497A/U (SERIES HN TO LC)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the adapter described herein shall consist of this document and the latest issue of MIL-A-27434.

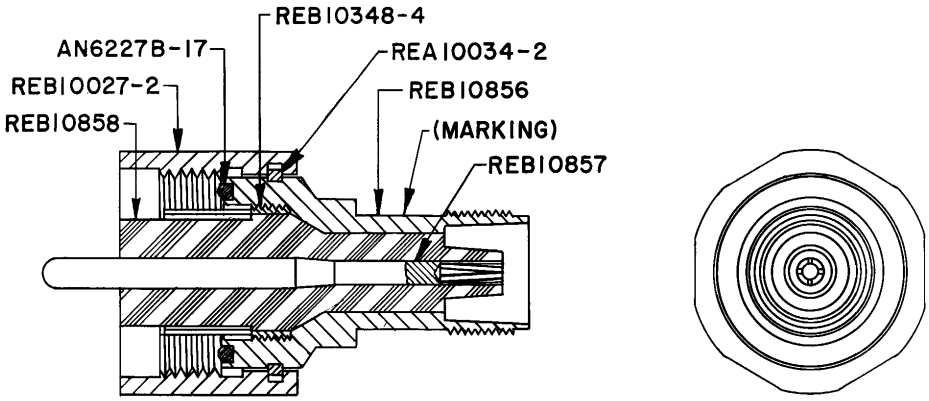

FIGURE 1. Type UG – 497A/U connector adapter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:54Z
Check the source to verify that this is the current version before use.

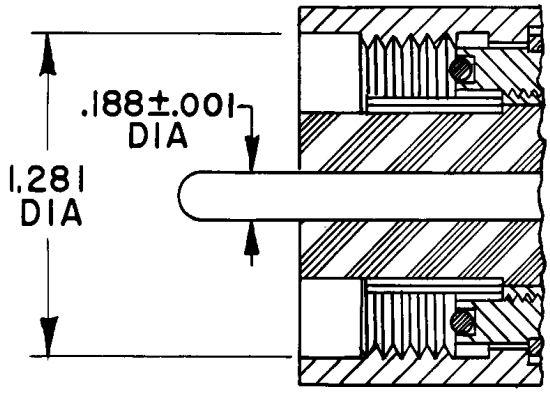

SERIES LC

Inches	millimeters
.001	0.02
.188	4.77
1.281	32.53

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are +/- 0.005 inch.

FIGURE 2. Series LC pin contact interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:54Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with Figure 1 and the following drawings:

SAE-AS28775 - Packing, Preformed, Hydraulic, +275 DEG. F. (“O” RING)
REB10027 - Coupling Nut
REA10034 – Spring
REB10348 – Contact
REB10856 – Body
REB10857 – Contact
REB10858 – Insulator

Mating characteristics: Series HN interface shall be in accordance with MIL-STD-348. Series LC interface shall be in accordance with figure 2.

Dielectric withstanding voltage: The test voltage shall be 7,800 volts rms, applied at a rate of 500 volts per second, until the rated test voltage is reached.

Part or Identifying Number (PIN): UG-497A/U.

Supersession: This document supersedes Navy drawing REB49273.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force - 99
Navy - SH

Preparing activity:
DLA - CC

(Project 5935-4446-000)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:54Z
Check the source to verify that this is the current version before use.