MILITARY SPECIFICATION

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, TYPE UG–218A/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy and the Air Force

1. SCOPE

1.1 This specification covers the detail requirements for type UG–218A/U, between series (series HN to series LC), radiofrequency, coaxial connector adapter

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein

SPECIFICATION

MILITARY

MIL–A–27434 — Adapters, Connector, Coaxial, Radiofrequency, Between Series, General Specification for.

STANDARD

ARMY—NAVY AERONAUTICAL

AN6227 — Packing, "O" Ring Hydraulic

DRAWINGS

BUREAU OF SHIPS

REB10027 — Coupling Nut
REA10034 — Spring
REB10348 — Contact
REA10837 — Contact
REA10838 — Insulator
REB10851 — Insulator
REB10861 — Contact
REB10862 — Body
REB10863 — Body

(Copies of specifications and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with Specification MIL–A–27434, and as specified herein

3.2 Design and construction. The connector adapter shall be of the design, construction, and physical dimensions specified on figure 1

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with Specification MIL–A–27434, and as specified herein

4.1.1 *Group B inspection* Group B inspection shall be in accordance with Specification MIL–

571048—61—(759)

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20260-20T11:52Z
Check the source to verify that this is the current version before use.


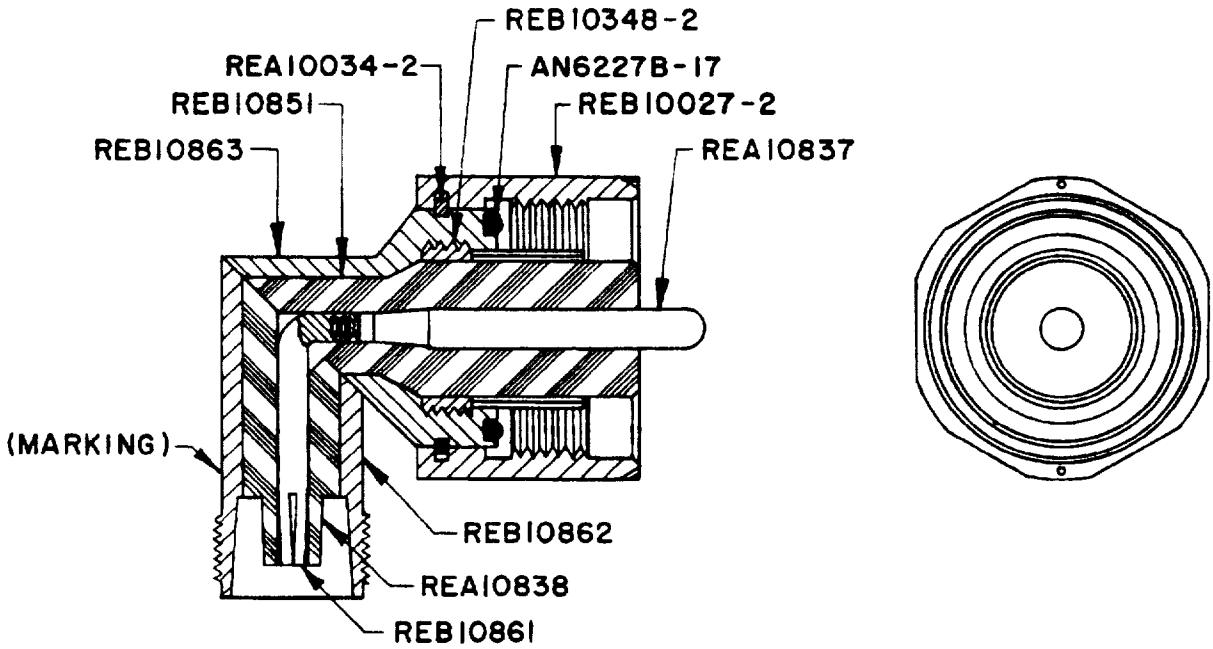


FIGURE 1 *Type UG-218A/U connector adapter*

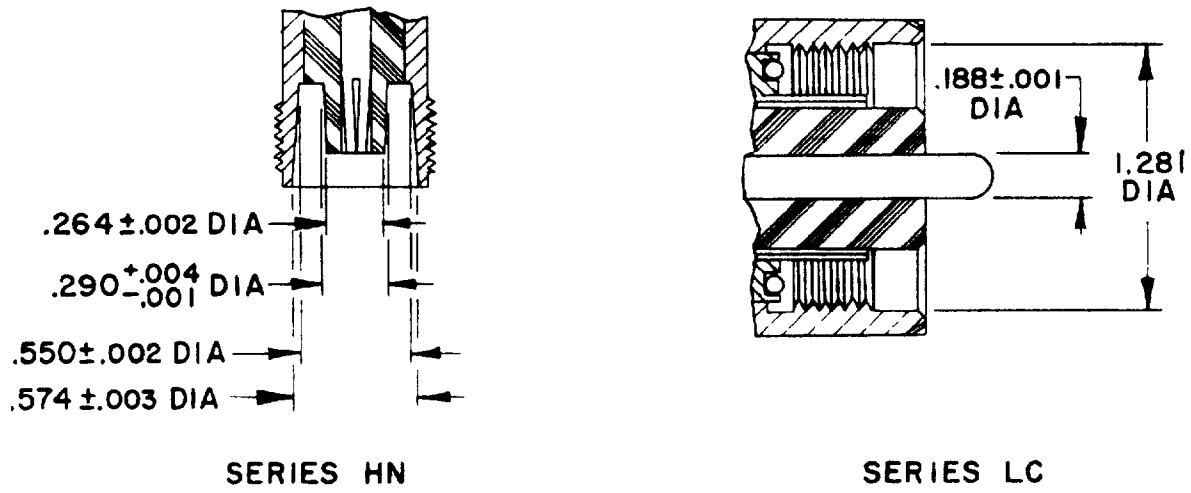

1 All dimensions in inches
2 Unless otherwise specified, tolerances are ±0.005 on decimals

FIGURE 2 *Dimensional requirement for group B inspection*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:52Z
Check the source to verify that this is the current version before use.

A-27434 Mating dimensions shall be as specified in figure 2

4.2 Dielectric withstanding voltage. The test voltage shall be 7,800 volts root mean square, applied at a rate of 500 volts per second, until the rated test voltage is reached

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-A-27434.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in Specification MIL-A-27434 are applicable to this specification

6.2 This specification covers the design of type UG-218A/U connector adapter which was previously covered by Bureau of Ships Drawing REB49275

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

Custodians:

Army—Signal Corps
Navy—Bureau of Ships
Air Force

Preparing activity:

Army—Signal Corps

Source: https://assist.dla.mil -- Downloaded: 20260-20T11:52Z
Check the source to verify that this is the currentversion before use.