The documentation and process conversion measures necessary to comply with this document shall be completed by 12 October 2013.

INCH-POUND

MIL-PRF-19500/358F
12 July 2013
SUPERSEDING
MIL-PR-19500/358E
23 JULY 1999

PERFORMANCE SPECIFICATION SHEET

* SEMICONDUCTOR DEVICE, DIODE, SILICON, VOLTAGE REGULATOR,
TYPES 1N3305B THROUGH 1N3350B AND RB, 1N4549B THROUGH 1N4554B AND RB,
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for 50 watt, silicon, voltage regulator diodes: B type (standard polarity) and RB type (reverse polarity). Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (DO-5).

* 1.3 Maximum ratings. Unless otherwise specified T_C = 25°C. Maximum ratings are as shown in maximum test ratings herein (see 3.8), and as follows:

a. Derate P_T = 50W at $T_C \geq$ +75°C at 0.5 W/°C above $T_A \geq$ +75°C.

* b. -65°C ≤ T_J ≤+175°C; -65°C ≤ T_{STG} ≤ +175°C.

* c. Thermal resistance ($R_{\theta JC}$) = 2.0°C/W θmaximum.

* 1.4 Primary electrical characteristics. Primary electrical characteristics are as shown in primary test ratings herein (see 3.8).

* Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil . Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS.

* 2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

* 2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at http://quicksearch.dla.mil or https://assist.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

* 2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

* 3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).


* 3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

I_{ZM}	Maximum Zener current.
I_{ZSM}	Maximum Zener surge current.
I_{ZT}	Zener test current.
Z	Impedance.
Z_K	Knee impedance.
α_{VZ}	Temperature coefficient.

* 3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and herein. Current density of internal conductors shall be as specified in MIL-PRF-l9500.

* 3.4.1 Polarity. Standard polarity units (B suffix) shall have the anode connected to the case stud. Reverse polarity units (RB suffix) shall have the cathode connected to the case stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

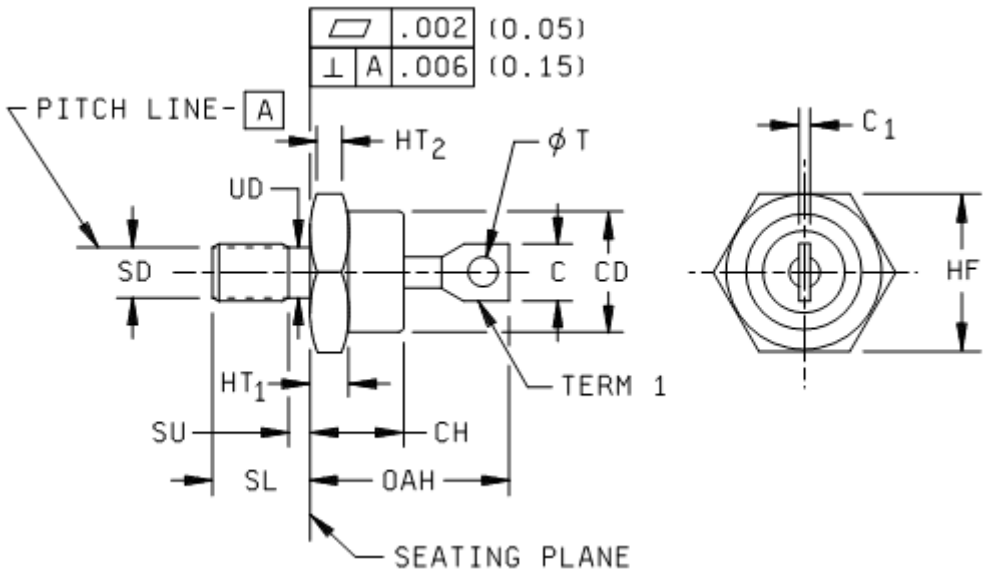

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
C		.375		9.53	
C1		.080		2.03	4
CD		.667		16.94	
CH		.450		11.43	
HF	.667	.687	16.94	17.45	
HT_1	.115	.200	2.92	5.08	
HT_2	.060		1.52		
OAH		1.000		25.4	
SD	.250-28				
SL	.422	.453	11.23	11.51	
SU					3
UD	.220	.249	5.59	6.32	
ΦT	.140	.175	3.56	4.45	

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Devices with “B“ suffix have the anode connected to the case and devices with “RB“ suffix (reverse polarity) have the anode connected to the terminal.
3. Complete threads to extend to within 2.5 threads of seating plane.
4. Angular orientation of this terminal is undefined.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

* FIGURE 1. Physical dimensions (DO-5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* 3.4.2 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL- STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

* 3.4.3 RB types. Reverse (cathode to stud) units shall be marked with an R preceding the B in the type designation (RB suffix).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

* 3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

* 3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

* 3.8 Maximum and primary test ratings. Maximum and primary test ratings for voltage regulator diodes are specified in table III herein.

* 3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4, and tables I, II, and III).

4.1.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500, and as specified herein. Lot accumulation period shall be 6 months in lieu of 6 weeks.

* 4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANS, JANTXV, and JANTX levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table E-IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
(1) 3C	Thermal impedance, see 4.3.2.	Thermal impedance, see 4.3.2.
9	I_{R1} and V_Z (for devices with $V_{Z\ (nom)} \geq 10$ V dc; see column 1 of table III).	Not applicable.
11	I_{R1} and V_Z; ΔI_{R1} = 100 percent of initial value or 2 µA dc, whichever is greater; ΔV_Z = ±1 percent of initial value (for devices with $V_{Z(nom)} \geq 10$ V dc; see column 2 of table III).	I_{R1} and V_Z
12	See 4.3.1.	See 4.3.1.
* 13	Subgroup 2 (except forward voltage test) and subgroup 3 of table I herein; ΔI_{R1} = 100 percent of initial value or 2 µA dc, whichever is greater, ΔV_Z = ±1 percent of initial value.	Subgroup 2 (except forward voltage test) of table I herein; ΔI_{R1} = 100 percent of initial value or 2 µA dc, whichever is greater, ΔV_Z = ±1 percent of initial value.

* (1) This test shall be performed anytime after screen 3.

* 4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: I_Z: Column 4 of table III at T_J = 150°C minimum.

* 4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750, as applicable, using the guidelines in that method for determining I_M, I_H, t_H, t_{SW} (V_C and V_H where appropriate). Measurement delay time (t_{MD}) = 70 µs max.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein. Group A inspection shall be performed on each sublot.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VIa (JANS) and table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* 4.4.2.1 Group B inspection, table E-VIa (JANS) of MIL-PRF-19500.

	Subgroup	Method	Condition
*	B4	1037	2,000 cycles. See 4.5.8. herein.
	B5	1027	I_Z = column 4 of table III for 168 hours; T_A = 125°C or adjusted, as required, to give an average lot; T_J = +225°C.
	B6	4081	$R_{\theta JC}$ = 2.0°C/W maximum. For purposes of this test "junction to case" shall be used in lieu of "junction to lead" and $R_{\theta JC}$ shall be used in lieu of $R_{\theta JL}$. The case shall be the reference point for calculation of junction to case thermal resistance ($R_{\theta JC}$). The mounting arrangement shall be with heat sink to case.

* 4.4.2.2 Group B inspection, table E-VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

	Subgroup	Method	Condition
	B2	4066	I_{ZSM} = column 9 of table III.
*	B3	1027	I_{ZT} = column 4 of table III, adjust T_A, mounting, or both to achieve T_J = 150°C minimum.
*	B3	1037	2,000 cycles. See paragraph 4.5.8.
	B5	4081	$R_{\theta JC}$ = 2.0°C/W maximum. For purposes of this test "junction to case" shall be used in lieu of "junction to lead" and $R_{\theta JC}$ shall be used in lieu of $R_{\theta JL}$. The case shall be the reference point for calculation of junction to case thermal resistance ($R_{\theta JC}$). The mounting arrangement shall be with heat sink to case.

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* 4.4.3.1 Group C inspection, table E-VII of MIL-PRF-19500.

	Subgroup	Method	Condition
	C2	2036	Tension: test condition A, 20 pounds, t = 15 seconds; Torque (stud): Test condition D2, mounting = normal mounting means, 30 lb-in, t = 30 seconds; bending stress: Test condition; 3 pounds, 15 seconds.
	C5		Not required.
*	C6	1027	I_Z = column 4 of table III, adjust T_A, mounting, or both to achieve T_J = +150°C minimum.
*	C6	1037	6,000 cycles. See paragraph 4.5.8.
	C8	4071	I_{ZT} = column 4 of table III; T_1 = 30°C ±3°C, T_2 = T_1 +100°C each sublot; α_{VZ} = column 12 of table III, %/°C; n = 22, c = 0; small lot = 12 devices, c = 0.
*	C9		Voltage regulation (see 4.5.2), each sublot, column 8 of table III. n = 22, c = 0

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Surge current I_{ZSM}. The currents specified in column 9 of table III shall be applied in the reverse direction and shall be superimposed on the current (I_Z = column 4 of table III) a total of five surges at 1 minute intervals. Each individual surge shall be a one-half square wave pulse of 1/120 second duration or a one-half sine wave with the same effective (rms) current.

* 4.5.2 Voltage regulation $V_{Z(reg)}$. A current at 10 percent of I_{ZM} (column 7 of table III herein) shall be maintained until thermal equilibrium is obtained and the V_Z shall be noted. The current shall then be increased to a level of 50 percent of I_{ZM} and maintained at this level until thermal equilibrium is obtained, at which time the voltage change shall not exceed column 8 ($V_{Z(reg)}$) of table III. During this test, the case temperature (T_C) of the diode shall be equal to 30 ±3°C.

4.5.3 Regulator voltage. The test current (I_{ZT} column 4 of table III) shall be applied until thermal equilibrium is obtained. During this test, the case temperature (T_C) of the diode shall be equal to 30 ±3°C.

4.5.4 Temperature coefficient of regulator voltage (αV_Z). The device shall be temperature stabilized with current applied prior to reading regulator voltage at the specified case temperatures.

4.5.5 Inspection condition. Unless otherwise specified herein, all inspections shall be made at T_C of 30 ±3°C.

4.5.6 Test ratings. Test ratings shall be as shown in table III. Type numbers with the suffix "RB" shall have identical requirements as shown in table III for the corresponding B type except the polarity shall be as specified in 3.4.1 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

4.5.7 Reverse current. The specified reverse voltage shall be applied to the terminals and the reverse current measured.

* 4.5.8 DC intermittent operation life. A cycle shall consist of an "on" period, when forward current is applied suddenly, not gradually, to the device for the time necessary to achieve an increase (delta) case temperature of +85°C +15°C, -5°C followed by an "off" period, when the current is suddenly removed for cooling the case through a similar delta temperature. Auxiliary (forced) cooling is permitted during the "off" period only. Forward current and "on" time, within specific limits, and "off" time may be adjusted to achieve the delta case temperature. Heat sinks shall only be used, if and to the degree necessary, to maintain test samples within the desired delta temperature tolerance. The heating time shall be such that 30 s $\leq t_{heating} \leq$ 180 s. The forward current may be steady-state dc, full-wave rectified dc, or the equivalent half-sine wave dc of the specified value. Alternately, Iz may be used to achieve heating. The test duration shall be the specified number of cycles. Within the time interval of 50 cycles before and 500 cycles after the termination of the test, the sample units shall be removed from the specified test conditions and allowed to reach room ambient conditions. Specified end-point measurements for qualification and quality conformance inspections shall be completed within 96 hours after removal of sample units from the specified test conditions. Additional readings may be taken at the discretion of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits 2/		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Forward voltage	4011	I_F = 10 A dc	V_F		1.5	V dc
Reverse current	4016	V_R = column 10 of table III; DC method (see 4.5.7)	I_{R1}		Col. 11	µA dc
Regulator voltage	4022	I_Z = column 4 of table III	V_Z	Col. 2	Col. 3	V dc
Subgroup 3						
High temperature operation:		T_A = 150°C				
Reverse current	4016	V_R = column 10 of table III; DC method	I_{R2}		Col. 13	µA dc
Subgroup 4						
Small-signal breakdown impedance	4051	I_Z = column 4 of table III; I_{sig} = 10 percent of I_Z	Z_Z		Col. 5	ohms
Knee impedance	4051	I_{ZK} = 5 mA dc; I_{sig} = 10 percent of I_Z	Z_{ZK}		Col. 6	ohms
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current (see 4.5.1)	4066	JANS level only I_{ZSM} = column 9 of table III				
End-point electrical measurements		See table I, subgroup 2 herein				
Subgroup 7						
Voltage regulation (see 4.5.2)		JANS level only; n = 22, c = 0	$V_{Z(reg)}$		Col. 8	V dc
Temperature coefficient of regulator voltage (see 4.5.4)	4071	I_Z = column 4 of table III; $T_1 = 30 \pm 3°C$, $T_2 = T_1 + 100°C$	α_{VZ}		Col. 12	%/°C

1/ For JANS, all devices required by the specified sampling plan shall be subjected to subgroups 2, 3, and 4 combined.
2/ Column references are for table III herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, and C delta electrical measurements. 1/ 2/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Forward voltage	4011	I_F = 10 A dc	ΔV_F 3/		±50 mV dc change from previously measured value.	

1/ The delta electrical measurements for table E-VIa (JANS) of MIL-PRF-19500 are as follows:
- a. Subgroup 3, see table II herein, step 1.
- b. Subgroup 4, see table II herein, step 1.
- c. Subgroup 5, see table II herein, step 1.

2/ The delta electrical measurements for table E-VII of MIL-PRF-19500 are as follows:
- a. Subgroup 2, see table II herein, step 1 (JANS).
- b. Subgroup 3, see table II herein, step 1 (JANS).
- c. Subgroup 6, see table II herein, step 1.

3/ Devices which exceed the group A limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

* TABLE III. Characteristics and ratings.

Device type	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13
	V_Z Nom	V_Z Min	V_Z Max	I_{ZT} T_C = 30°C	Z	Z_K	I_{ZM} T_C = 30°C	$V_{Z(reg)}$	I_{ZSM} T_C = 30°C	V_R	I_{R1}	α_{VZ}	I_{R2} T_A = 150°C
	volts	volts	volts	mA dc	ohms	ohms	mA dc	volts	A dc	volts	µA dc	%/°C	µA dc
1N4549B, RB	3.9	3.70	4.09	3,200	0.16	400	10,000	0.66	40.0	0.5	150	-.06	1/
1N4550B, RB	4.3	4.08	4.51	2,900	0.16	500	9,000	0.58	38.0	0.5	150	-.05	1/
1N4551B, RB	4.7	4.46	4.93	2,650	0.12	600	8,000	0.40	35.0	1.0	100	±.025	1/
1N4552B, RB	5.1	4.84	5.35	2,450	0.12	650	7,500	0.36	32.0	1.0	20	± .030	1/
1N4553B, RB	5.6	5.32	5.88	2,250	0.12	900	7,000	0.34	30.0	1.0	20	.050	1/
1N4554B, RB	6.2	5.89	6.51	2,000	0.14	1,000	6,500	0.36	25.0	2.0	20	.055	1/
1N3305B, RB	6.8	6.46	7.14	1,850	0.2	70	7,000	0.4	37.0	4.5	150	.057	1,000
1N3306B, RB	7.5	7.13	7.87	1,700	0.3	70	6,360	0.5	33.0	5.0	100	.067	750
1N3307B, RB	8.2	7.79	8.61	1,500	0.4	70	5,800	0.6	29.0	5.4	50	.070	500
1N3308B, RB	9.1	8.65	9.55	1,370	0.5	70	5,240	0.7	26.5	6.1	25	.075	400
1N3309B, RB	10	9.50	10.50	1,200	0.6	80	4,760	0.9	24.0	6.7	25	.081	300
1N3310B, RB	11	10.45	11.55	1,100	0.8	80	4,330	1.0	21.5	8.4	10	.085	200
1N3311B, RB	12	11.40	12.60	1,000	1.0	80	3,970	1.1	20.0	9.1	10	.079	200
1N3312B, RB	13	12.35	13.65	960	1.1	80	3,750	1.2	18.5	9.9	10	.080	200
1N3314B, RB	15	14.25	15.75	830	1.4	80	3,170	1.5	15.5	11.4	10	.082	200
1N3315B, RB	16	15.20	16.80	780	1.6	80	2,970	1.6	14.75	12.2	10	.083	200
1N3317B, RB	18	17.10	18.90	700	2.0	80	2,640	1.9	12.75	13.7	10	.085	200
1N3319B, RB	20	19.00	21.00	630	2.4	80	2,380	2.3	11.75	15.2	10	.086	200
1N3320B, RB	22	20.90	23.10	570	2.5	80	2,160	2.5	10.5	16.7	10	.087	200
1N3321B, RB	24	22.80	25.20	520	2.6	80	1,980	2.6	9.75	18.2	10	.088	200
1N3323B, RB	27	25.65	28.35	460	2.8	90	1,760	2.9	8.25	20.6	10	.090	200
1N3324B, RB	30	28.50	31.50	420	3.0	90	1,590	3.0	7.75	22.8	10	.091	200
1N3325B, RB	33	31.35	34.65	380	3.2	90	1,440	3.2	7.25	25.1	10	.092	200
1N3326B, RB	36	34.20	37.80	350	3.5	90	1,320	3.4	6.5	27.4	10	.093	200
1N3327B, RB	39	37.10	40.90	320	4.0	90	1,220	3.6	5.88	29.7	10	.094	200

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

TABLE III. Characteristics and ratings - Continued.

Device type	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13
	V_Z Nom	V_Z Min	V_Z Max	I_{ZT} T_C = 30°C	Z_Z	Z_{ZK}	I_{ZM} T_C = 30°C	$V_{Z(reg)}$	I_{ZSM} T_C = 30°C	V_R	I_{R1}	α_{VZ}	I_{R2} T_A = 150°C
	volts	volts	volts	mA dc	ohms	ohms	mA dc	volts	A dc	volts	µA dc	%/°C	µA dc
1N3328B, RB	43	40.90	45.10	290	4.5	90	1,110	3.8	5.38	32.7	10	.095	200
1N3330B, RB	47	44.65	49.35	270	5.0	100	1,020	4.0	4.90	35.8	10	.095	200
1N3332B, RB	51	48.45	53.55	245	5.2	100	930	4.4	4.63	38.8	10	.096	200
1N3334B, RB	56	53.20	58.80	220	6.0	110	850	4.75	4.13	42.6	10	.096	200
1N3335B, RB	62	58.90	65.10	200	7.0	120	770	5.0	3.68	47.1	10	.097	200
1N3336B, RB	68	64.60	71.40	180	8	140	700	5.5	3.35	51.7	10	.097	200
1N3337B, RB	75	71.25	78.75	170	9	150	640	5.75	3.00	56.0	10	.098	200
1N3338B, RB	82	77.90	86.10	150	11	160	580	6.25	2.75	62.2	10	.098	200
1N3339B, RB	91	86.45	95.55	140	15	180	530	6.75	2.35	69.2	10	.099	200
1N3340B, RB	100	95.0	105.0	120	20	200	480	7.5	2.25	76.0	10	.100	200
1N3342B, RB	110	104.5	115.5	110	30	220	430	9.0	2.05	83.6	10	.100	200
1N3343B, RB	120	114.0	126.0	100	40	240	400	9.5	1.88	91.2	10	.100	200
1N3344B, RB	130	123.5	136.5	95	50	275	370	10.0	1.73	98.8	10	.100	200
1N3346B, RB	150	142.5	157.5	85	75	400	320	12.0	1.50	114.0	10	.100	200
1N3347B, RB	160	152.0	168.0	80	80	450	300	13.0	1.43	121.6	10	.100	200
1N3349B, RB	180	171.0	189.0	68	90	525	260	14.5	1.25	136.8	10	.100	200
1N3350B, RB	200	190.0	210.0	65	100	600	240	16,.0	1.10	152.0	10	.100	200

1/ This test is not applicable for devices 1N4549B, RB through 1N4554B, RB

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

* 6. NOTES

* (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

* 6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.2).

d. Product assurance level and type designator.

* 6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Air Force – 85
NASA – NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2013-098)

Review activities:
Army - AR, MR, SM
Air Force - 99

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:52Z
Check the source to verify that this is the current version before use.