MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY 11747210
TARGET COINCIDENCE BOARD

This Amendment forms a part of Military Specification MIL-C-48581(AR), dated 20 November 1975, and is approved for use by the US Army Armament Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

Figure 1: Delete and substitute new "Figure 1".

PAGE 6

3.5.2.4, line 3: Change "...not less than +2Vdc." to "...not less than +0.9Vdc."

line 6: Change "...level of -.86 ± .04Vdc" to "...level of -0.75± 0.1Vdc".

3.5.2.5, line 3: Change "...not less than +2Vdc" to "...not less than +0.9Vdc".

lines 8 and 9: Change "...level of -0.86 ± .04 Vdc" to "...level of -0.75 ± 0.1Vdc".

3.5.2.6, line 4: Change "±20 ns" to "± 200 ns".

PAGE 7

3.5.2.10, line 4: Change "shall occur 8.2 ± 0.2 sec" to "shall repeat every 16.4 ± 0.45 sec".

3.5.2.11 Add new paragraph:

"Mod To. With the Mod To trigger (Item 1, Table 1) applied, the signal present at TP5 on the test fixture shall be a positive pulse from 0.0Vdc to 4.0 ± 1.0Vdc, 0.6 to 1.2u sec pulse width and a PRF of 20.0 ± 0.2 Khz."

FSC 4931

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

PAGE 10

Table IV: Change descriptions of Item 1 "1. Power supply 5.0 ± 0.25 Vdc,..." to "1. Power supply 15.0 ± 0.25Vdc,...".

Item 7: "7. Power supply 0 to 5V adj..." to "7. Power supply 0 to 35V adj...".

PAGE 11

Figure 2: Delete and substitute new "Figure 2".

PAGE 12

Figure 3: Delete and substitute new "Figure 3".

PAGE 13

Table V: Change description of "S1" to double pole".

"S1 SWITCH SPDT" to "S1 SWITCH DPDT"

Change description of "S2" to double pole".

"S2 Momentary SWITCH SPST" to "S2 Momentary SWITCH DPST".

Add new switch "S3" to table.

"S3 SWITCH 3PDT".

Table VI: Add transistor "Q1" to table.

"Q1 Transistor 2N2222".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.


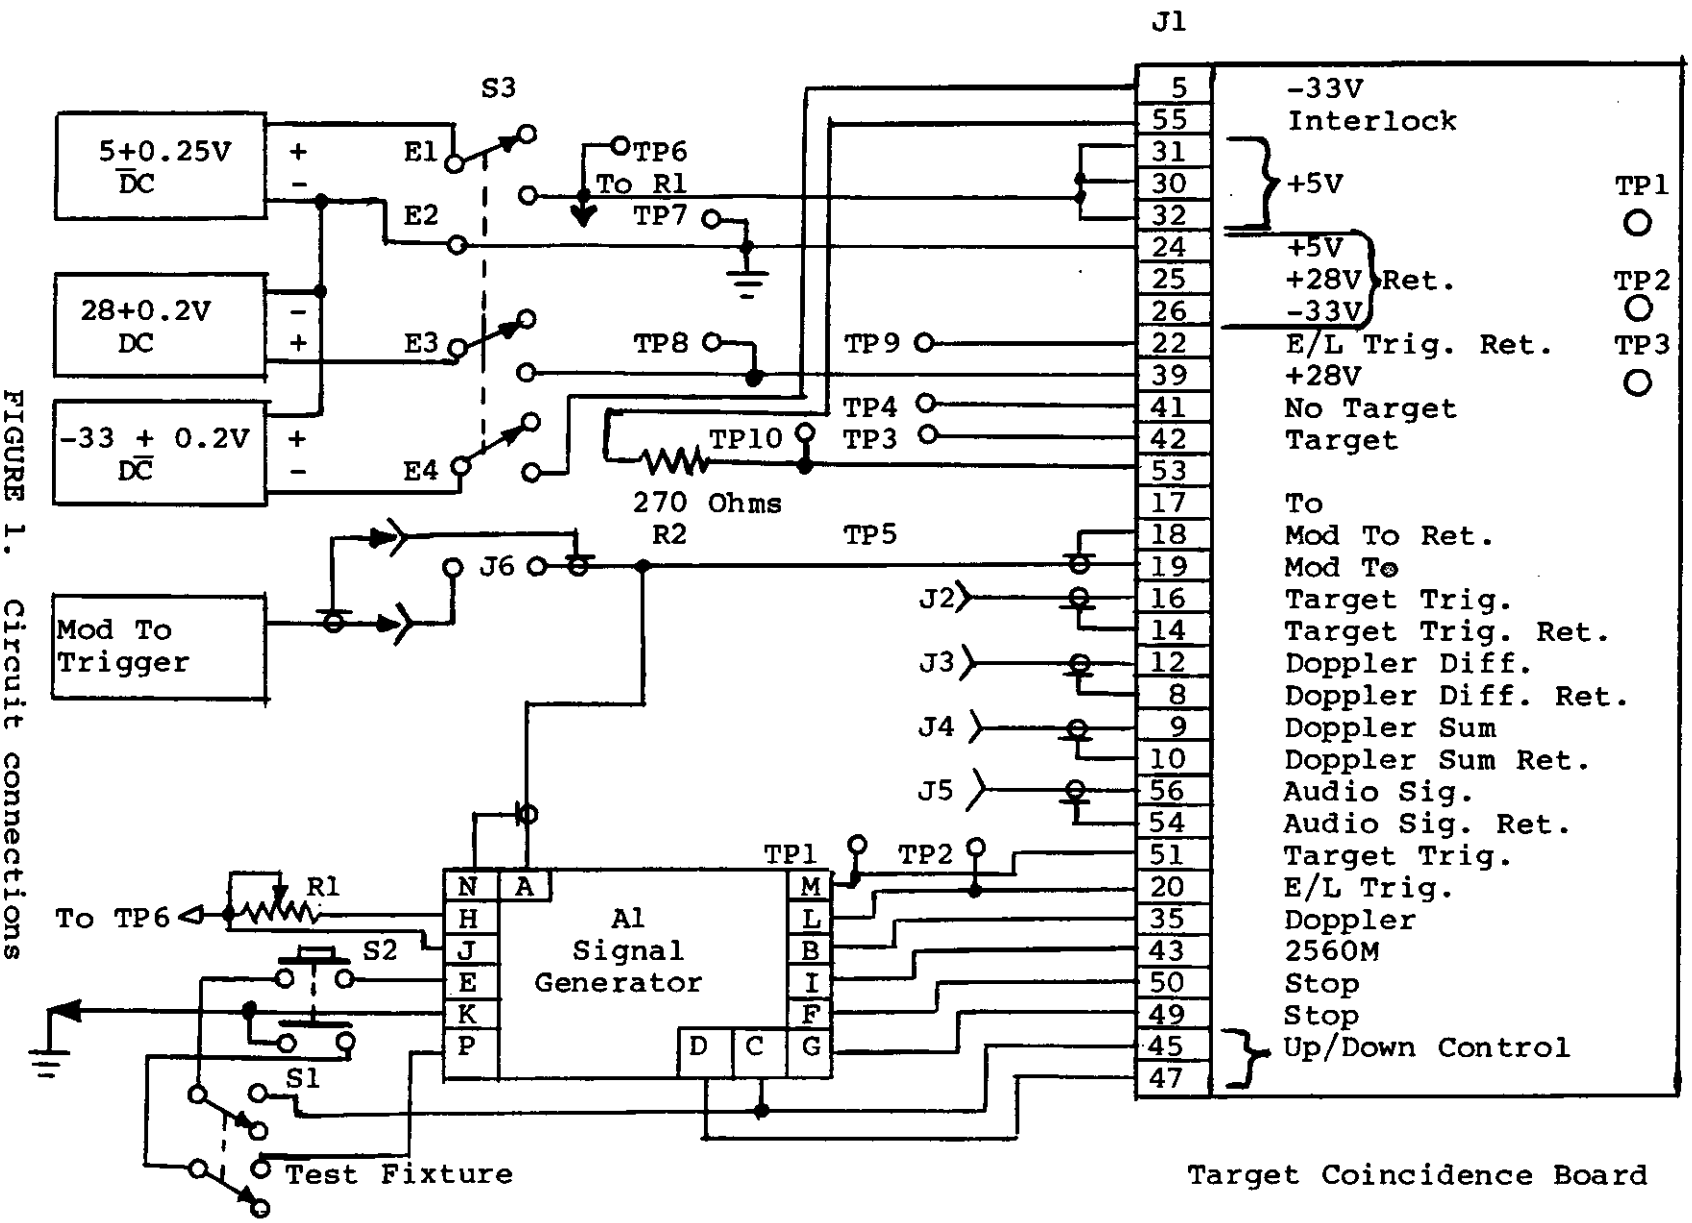


FIGURE 1. Circuit connections

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

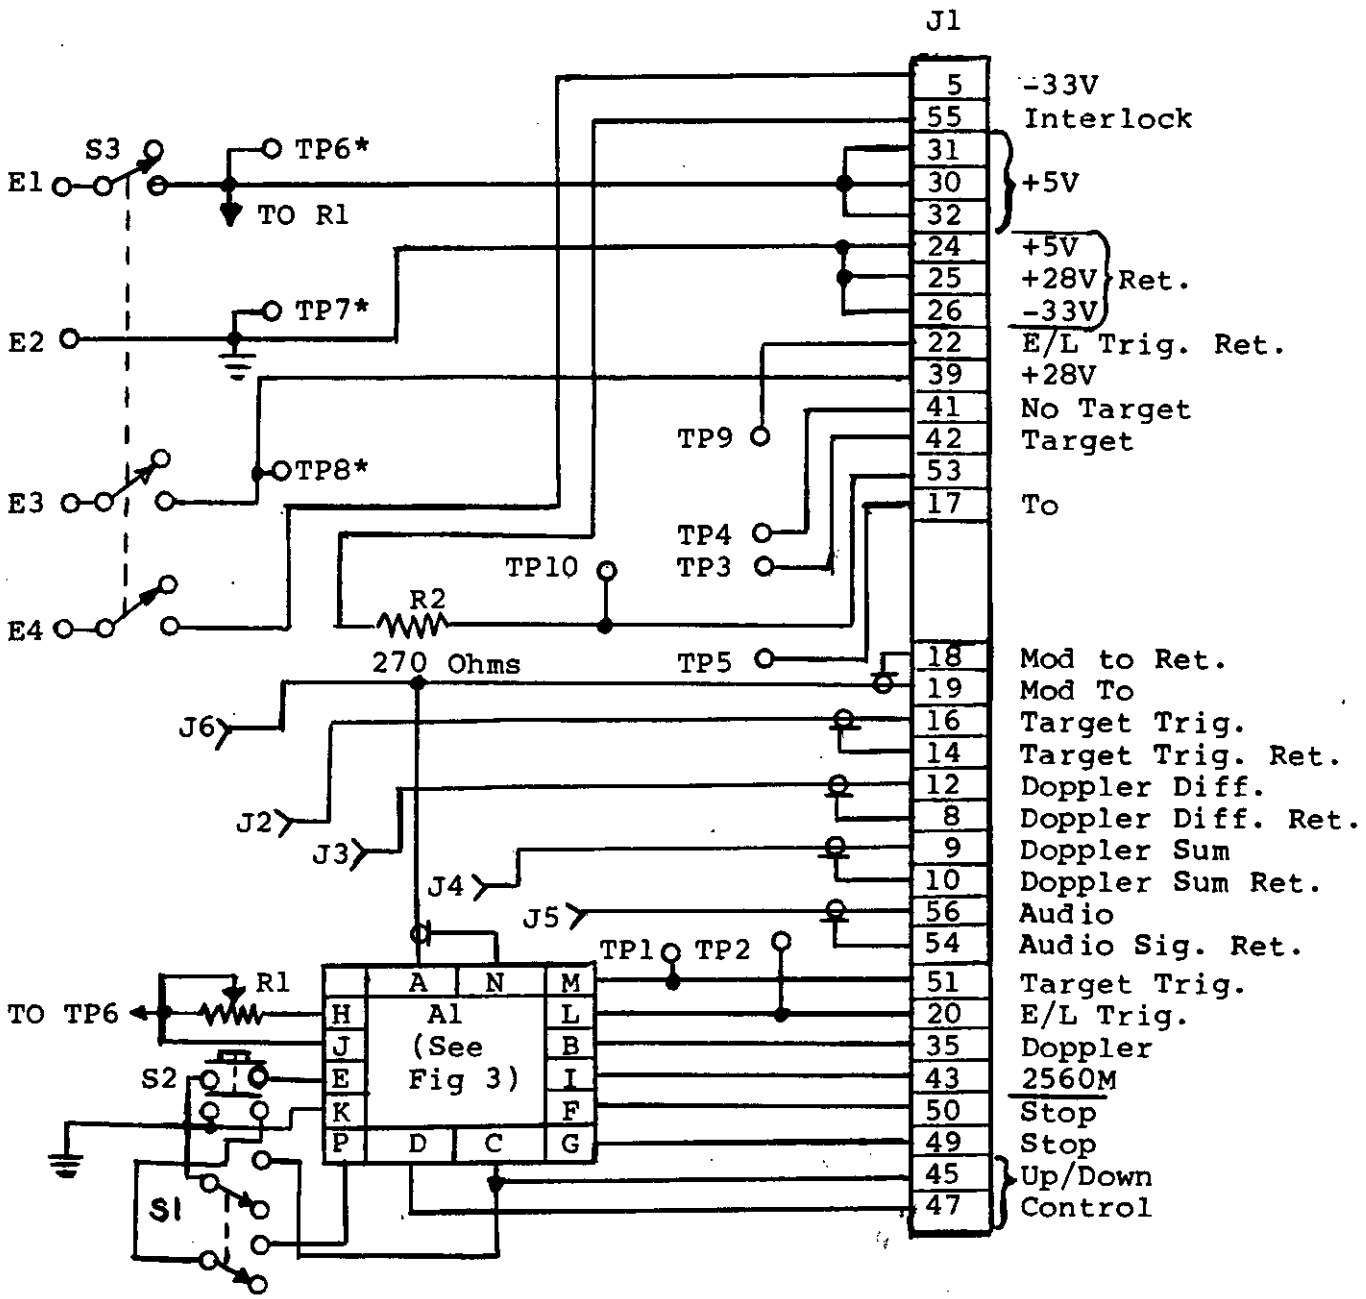

*Connect TP6 thru TP8 as close to J1 as possible.

FIGURE 2. Test fixture

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.

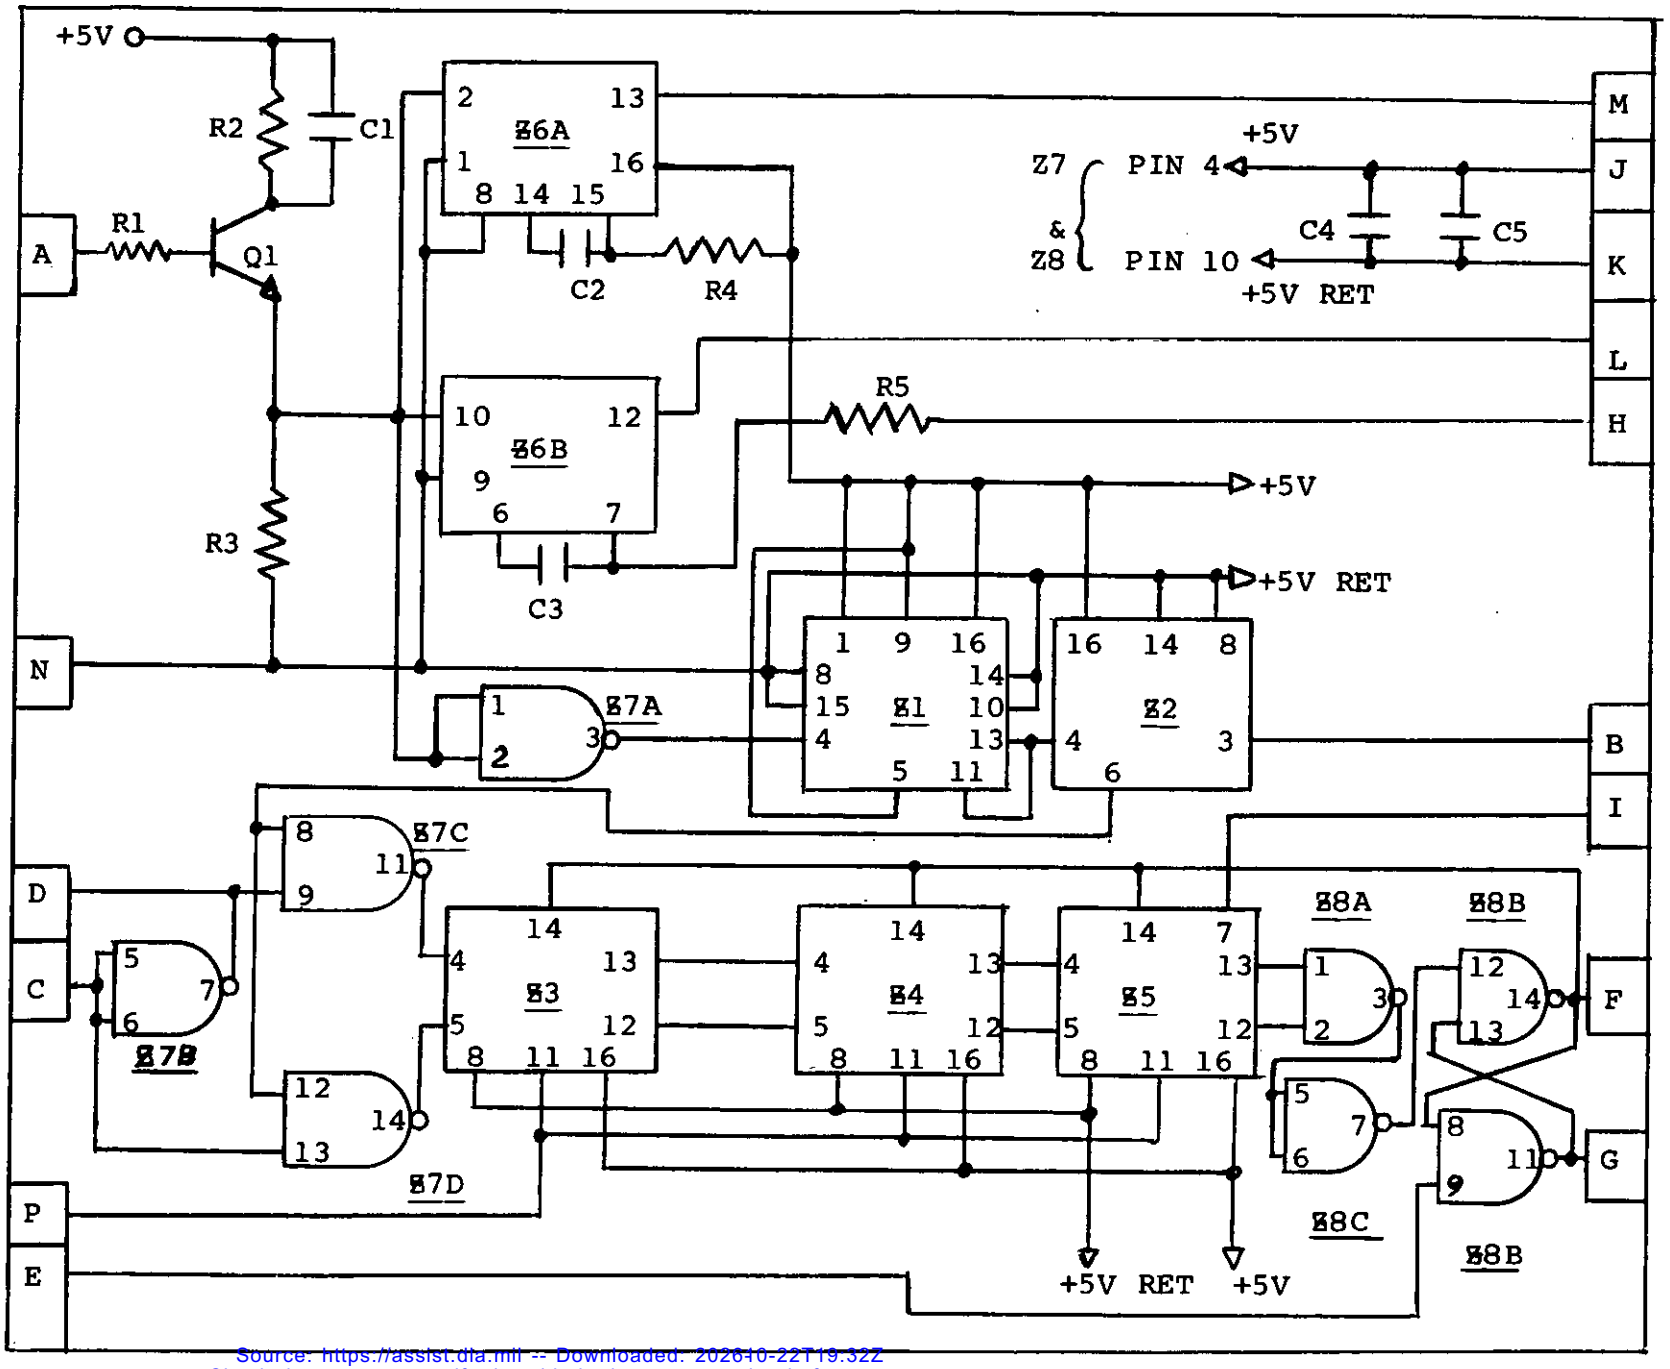


FIGURE 3. Test fixture signal generator A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 4931-A214)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:32Z
Check the source to verify that this is the current version before use.