
MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, TELEPHONE, ELECTRICAL

This specification sheet is approved for use by the Army Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of specification MIL-C-55074(EL).

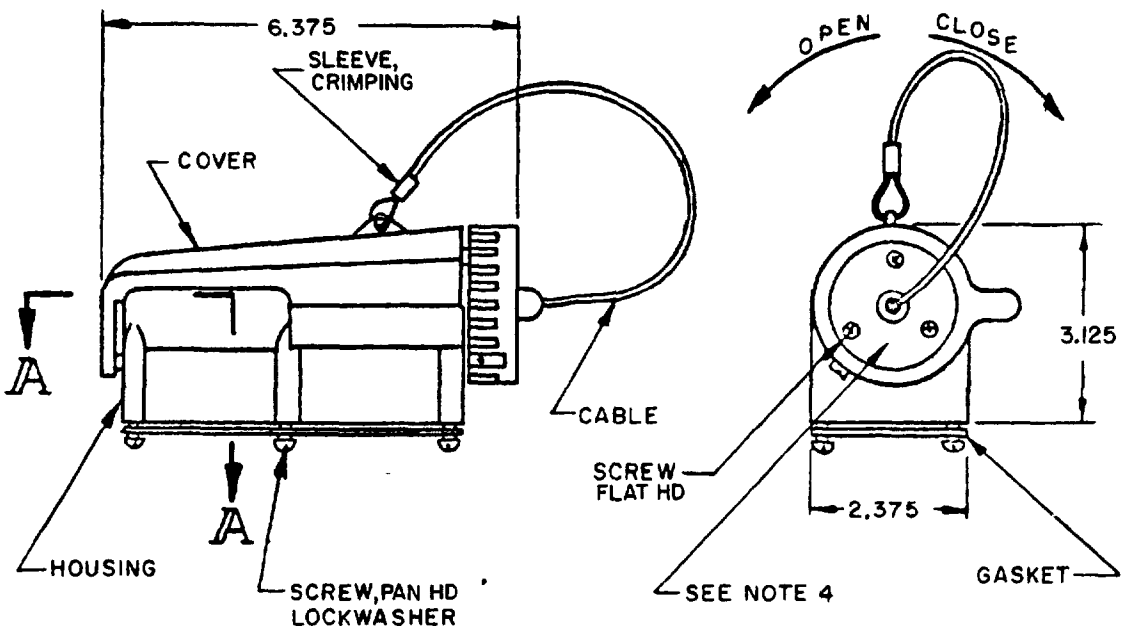


| INCHES | MM |
|---|---|
| 2.375 | 60.32 |
| 2.437 | 61.90 |
| 3.125 | 79.38 |
| 6.375 | 161.92 |


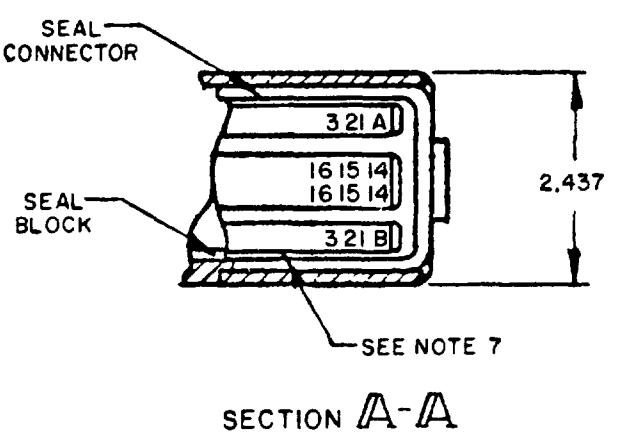



FIGURE 1. Connector receptacle.



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

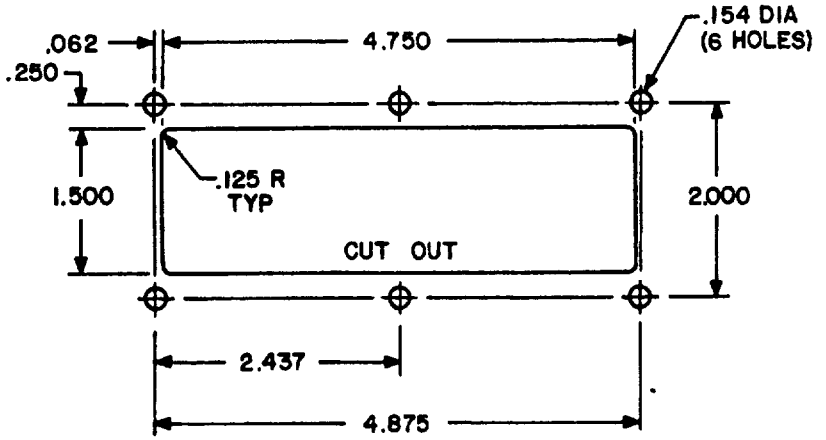


| INCHES | MM |
|---|---|
| .015 | .38 |
| .062 | 1 57 |
| .125 | 3.18 |
| .154 | 3 91 |
| .250 | 6.35 |
| 1.500 | 38.10 |
| 2.000 | 50.80 |
| 2 437 | 61 90 |
| 4 750 | 120.65 |
| 4.875 | 123 82 |

Ⓐ CONNECTOR MOUNTING HOLE PATTERN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).
4. Marking to appear in area shown. Marking to consist of manufacturer's name or FSC code ident., CONN. RECP. ELEC., U-187A/G (M 55074/3), molded in characters, approximately .125 (3.18 mm) high.
5. This connector mates with MIL-C-55074/1 (U-185B/G).
6. Turning collar lock to left unlocks cover for mating -- turning to right locks cover. (See applicable end view, page 1.)
7. See MIL-C-55074/4 for contact assembly specifications.
8. M 55074/3 represents U-187A/G where applicable in MIL-C-55074.
9. Connector shall be manufactured in accordance with drawing number SC-DL-173820.
10. Connector must conform to the interchangeability requirements of gage number SC-GL-57997.

FIGURE 1. Connector receptacle - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations See figure

Material

Housing - Aluminum, commercial alloy 380, in accordance with QQ-A-591, finish in accordance with MIL-F-14072.

Cover - Aluminum, commercial alloy 380 in accordance with QQ-A-591, finish in accordance with MIL-F-14072.

Seal, block - Low temperature neoprene RS510 $F_2$ in accordance with MIL-STD-417

Seal, connector - Silicone rubber, Class IIb, grade 40, in accordance with ZZ-R-765.

Gasket - Neoprene.

Cable - .062 dia. 7 wires (.010) stranded x 7 to .037 dia, each in accordance with QQ-W-423 (9 inch cut length). Corrosion resistant steel, MIL-W-83420.

Screw, machine pan head, slotted - #8-32 NC x .625 lg. per MS51957-46.

Washer, lock, split - #8 size, steel MS35338-23.

Sleeve, crimping - Copper, zinc plated

Screw, machine, flat - Countersunk head, cross-recessed, #6-32 NC x .317 lg., MS551959-24.

Part number M55074/3-01

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian.
Army - EL

Preparing activity
Army - EL

Agent
DLA - ES

(Project 5935-A054-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-55074/3A(EL) CONNECTOR, RECEPTACLE, TELEPHONE, ELECTRICAL

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID




OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.