INCH-POUND
MIL-PRF-49470/3B
14 December 2000
SUPERSEDING
MIL-PRF-49470/3A
11 January 2000

PERFORMANCE SPECIFICATION SHEET

# CAPACITOR, FIXED, CERAMIC DIELECTRIC, SWITCH MODE POWER SUPPLY (GENERAL PURPOSE AND TEMPERATURE STABLE), STANDARD RELIABILITY AND HIGH RELIABILITY, CONFORMALLY COATED, HORIZONTALLY STACKED, STYLE PS03

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-49470.

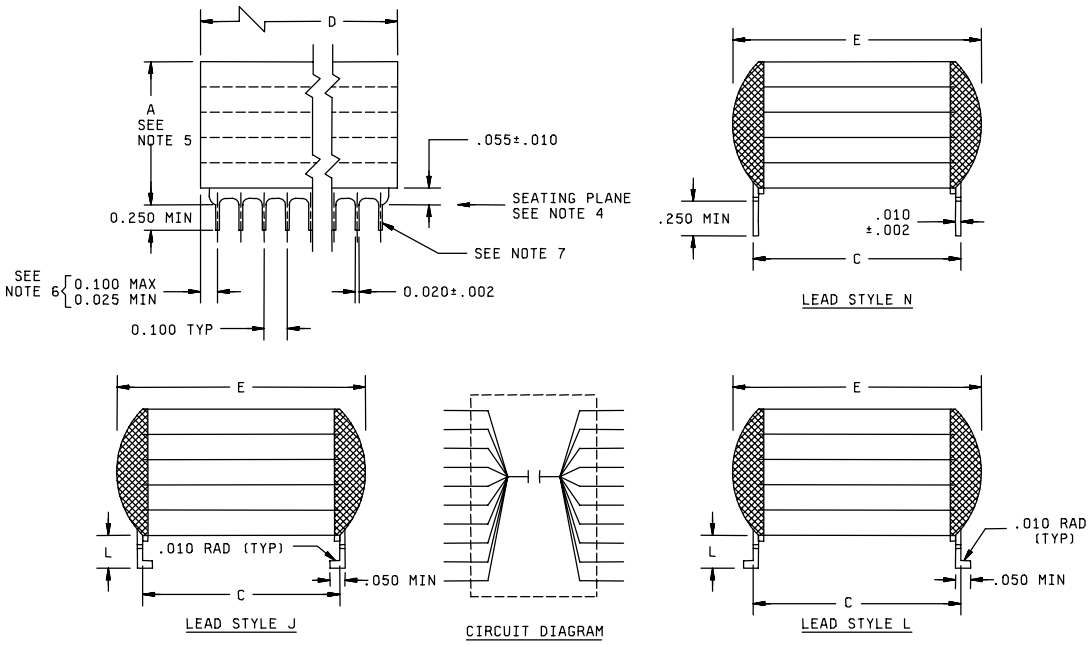



FIGURE 1. Style PS03 capacitors.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

| Dimensions | | | | | |
|---|---|---|---|---|---|
| Case code | C ± .025 | D | | E (max) | Number of leads per side |
| | | Min | Max | | |
| 1 | .450 | 1.950 | 2.075 | .500 | 20 |
| 2 | .800 | 1.450 | 1.535 | .870 | 15 |
| 3 | .450 | .950 | 1.075 | .500 | 10 |
| 4 | .400 | .350 | .425 | .440 | 4 |
| 5 | .250 | .224 | .275 | .300 | 3 |
| 6 | 1.250 | 1.950 | 2.075 | 1.350 | 20 |

| Symbol (last digit of PIN) | Lead style | Height profile (Dimension A) | Formed lead length, L (inches) |
|---|---|---|---|
| N | N (straight) | Standard | N/A |
| L | L (formed) | Standard | .070 ± .010 |
| M | L (formed) | Standard | .045 ± .010 |
| J | J (formed) | Standard | .070 ± .010 |
| K | J (formed) | Standard | .045 ± .010 |
| A | N (straight) | Low | N/A |
| B | L (formed) | Low | .070 ± .010 |
| D | L (formed) | Low | .045 ± .010 |
| C | J (formed) | Low | .070 ± .010 |
| F | J (formed) | Low | .045 ± .010 |

| Inches | mm |
|---|---|
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .050 | 1.27 |
| .055 | 1.40 |
| .070 | 1.78 |
| .100 | 2.54 |
| .224 | 5.69 |
| .250 | 6.35 |
| .275 | 6.98 |
| .300 | 7.62 |
| .350 | 8.89 |
| .400 | 10.16 |
| .425 | 10.80 |
| .440 | 11.18 |
| .450 | 11.43 |
| .500 | 12.70 |
| .800 | 20.32 |
| .870 | 22.10 |
| .950 | 24.13 |
| 1.075 | 27.30 |
| 1.250 | 31.75 |
| 1.350 | 34.29 |
| 1.450 | 36.83 |
| 1.535 | 38.99 |
| 1.950 | 49.53 |
| 2.075 | 52.70 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 inch (0.25 mm).
4. Lead frame configuration is shown as typical above the seating plane.
5. See table I for specific maximum A dimension. For maximum B dimension, add .065 inch (1.65 mm) to the appropriate A dimension. For all lead styles, the number of chips is determined by the capacitance and voltage rating.
6. For case code 5, dimensions shall be .100 (2.54 mm) maximum and .012 inch (0.30 mm) minimum.
7. Lead alignment within pin rows shall be within ±.005 inch (0.13 mm).

FIGURE 1. Style PS03 capacitors - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Precautionary note: Capacitors covered by this specification sheet are very susceptible to thermal shock damage due to their large ceramic mass. Temperature profiles used should provide adequate temperature rise and cool-down time to prevent damage from thermal shock.

Dimensions and configurations: See figure 1.

Case type: Conformally coated, horizontally stacked.

Capacitance: See table I.

Capacitance tolerance: J = ±5 percent, K = ±10 percent, M = ±20 percent.

Operating temperature range: -55°C to +125°C.

Voltage rating: See table I.

Dielectric types: BP, BQ, BR, and BX in accordance with MIL-PRF-49470.

Temperature coefficient: 0 ppm/°C ±30 ppm/°C (BP), ±15 percent (BQ, BR, BX).

Voltage-temperature limits: In accordance with MIL-PRF-49470.

| Symbol | Capacitance change with reference to +25°C | |
|---|---|---|
| | Step A through step D of voltage-temperature limit cycle table of MIL-PRF-49470 | Step E through step G of voltage-temperature limit cycle table of MIL-PRF-49470 |
| BP<br>BQ<br>BR<br>BX | 0 ppm/°C ± 30 ppm/°C<br>±15 percent<br>±15 percent<br>±15 percent | 0 ppm/°C ± 30 ppm/°C<br>+15, -50 percent<br>+15, -40 percent<br>+15, -25 percent |

Marking: In accordance with MIL-PRF-49470.

Body insulation: Not applicable.

Solderability: The leads shall be solderable up to the seating plane.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 50 V | | | | | | |
| -49470P03563-A- | 0.056 | J, K | BP | 5 | N, L, M, J, K | .270 (8.86) |
| -49470P03683-A- | 0.068 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03823-A- | 0.082 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03104-A- | 0.1 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03124-A- | 0.12 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03154-A- | 0.15 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03184-A- | 0.18 | J, K | BP | 5 | N, L, M, J, K | .660 (16.67) |
| -49470P03184-A- | 0.18 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03224-A- | 0.22 | J, K | BP | 5 | N, L, M, J, K | .660 (16.67) |
| -49470P03224-A- | 0.22 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03274-A- | 0.27 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03274-A- | 0.27 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03334-A- | 0.33 | J, K | BP | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03394-A- | 0.39 | J, K | BP | 4 | N, L, M, J, K | .660 (16.67) |
| -49470P03474-A- | 0.47 | J, K | BP | 4 | N, L, M, J, K | .660 (16.67) |
| -49470P03564-A- | 0.56 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03564-A- | 0.56 | J, K | BP | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03684-A- | 0.68 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03824-A- | 0.82 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03105-A- | 1 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03105-A- | 1 | K, M | BX | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03125-A- | 1.2 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03125-A- | 1.2 | K, M | BX | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03155-A- | 1.5 | J, K | BP | 3 | N, L, M, J, K | .600 (16.76) |
| -49470X03155-A- | 1.5 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03185-A- | 1.8 | J, K | BP | 3 | N, L, M, J, K | .660 (16.67) |
| -49470X03185-A- | 1.8 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03225-A- | 2.2 | J, K | BP | 3 | N, L, M, J, K | .800 (20.32) |
| -49470P03225-A- | 2.2 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03225-A- | 2.2 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03275-A- | 2.7 | J, K | BP | 1 | N, L, M, J, K | .530 (13.46) |
| -49470P03275-A- | 2.7 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03275-A- | 2.7 | K, M | BX | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03335-A- | 3.3 | J, K | BP | 1 | N, L, M, J, K | .660 (16.67) |
| -49470P03335-A- | 3.3 | J, K | BP | 2 | A, B, D, C, F | .530 (13.46) |
| -49470X03335-A- | 3.3 | K, M | BX | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03395-A- | 3.9 | J, K | BP | 1 | N, L, M, J, K | .660 (16.67) |
| -49470P03395-A- | 3.9 | J, K | BP | 2 | A, B, D, C, F | .660 (16.67) |
| -49470X03395-A- | 3.9 | K, M | BX | 5 | N, L, M, J, K | .660 (16.67) |
| -49470P03475-A- | 4.7 | J, K | BP | 1 | N, L, M, J, K | .800 (20.32) |
| -49470P03475-A- | 4.7 | J, K | BP | 2 | A, B, D, C, F | .660 (16.67) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 50 V | | | | | | |
| -49470X03475-A- | 4.7 | K, M | BX | 5 | N, L, M, J, K | .660 (16.67) |
| -49470X03475-A- | 4.7 | K, M | BX | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03565-A- | 5.6 | J, K | BP | 2 | N, L, M, J, K | .800 (20.32) |
| -49470X03565-A- | 5.6 | K, M | BX | 5 | N, L, M, J, K | .800 (20.32) |
| -49470X03565-A- | 5.6 | K, M | BX | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03685-A- | 6.8 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03685-A- | 6.8 | K, M | BX | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03825-A- | 8.2 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03825-A- | 8.2 | K, M | BX | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03106-A- | 10 | J, K | BP | 6 | N, L, M, J, K | .660 (16.67) |
| -49470X03106-A- | 10 | K, M | BX | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03126-A- | 12 | J, K | BP | 6 | N, L, M, J, K | .660 (16.76) |
| -49470X03126-A- | 12 | K, M | BX | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03156-A- | 15 | J, K | BP | 6 | N, L, M, J, K | .800 (20.32) |
| -49470X03156-A- | 15 | K, M | BX | 4 | N, L, M, J, K | .800 (20.32) |
| -49470X03156-A- | 15 | K, M | BX | 3 | A, B, D, C, F | .390 (9.91) |
| -49470X03186-A- | 18 | K, M | BX | 3 | N, L, M, J, K | .390 (9.91) |
| -49470X03226-A- | 22 | K, M | BX | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03276-A- | 27 | K, M | BX | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03336-A- | 33 | K, M | BX | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03396-A- | 39 | K, M | BX | 3 | N, L, M, J, K | .660 (16.76) |
| -49470X03476-A- | 47 | K, M | BX | 3 | N, L, M, J, K | .800 (20.32) |
| -49470X03476-A- | 47 | K, M | BX | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03566-A- | 56 | K, M | BX | 1 | N, L, M, J, K | .530 (13.46) |
| -49470X03566-A- | 56 | K, M | BX | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03686-A- | 68 | K, M | BX | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03686-A- | 68 | K, M | BX | 2 | A, B, D, C, F | .530 (13.46) |
| -49470X03826-A- | 82 | K, M | BX | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03826-A- | 82 | K, M | BX | 2 | A, B, D, C, F | .530 (13.46) |
| -49470X03107-A- | 100 | K, M | BX | 1 | N, L, M, J, K | .800 (20.32) |
| -49470X03107-A- | 100 | K, M | BX | 2 | A, B, D, C, F | .660 (16.76) |
| -49470X03127-A- | 120 | K, M | BX | 2 | N, L, M, J, K | .660 (16.76) |
| -49470X03157-A- | 150 | K, M | BX | 2 | N, L, M, J, K | .800 (20.32) |
| -49470X03187-A- | 180 | K, M | BX | 6 | N, L, M, J, K | .660 (16.76) |
| -49470X03227-A- | 220 | K, M | BX | 6 | N, L, M, J, K | .660 (16.76) |
| -49470X03277-A- | 270 | K, M | BX | 6 | N, L, M, J, K | .800 (20.32) |
| 100 V | | | | | | |
| -49470P03473-B- | 0.047 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03563-B- | 0.056 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03683-B- | 0.068 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03823-B- | 0.082 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 100 V | | | | | | |
| -49470P03104-B- | 0.1 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03124-B- | 0.12 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03154-B- | 0.15 | J, K | BP | 5 | N, L, M, J, K | .660 (16.76) |
| -49470P03154-B- | 0.15 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03184-B- | 0.18 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03184-B- | 0.18 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03224-B- | 0.22 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03224-B- | 0.22 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03274-B- | 0.27 | J, K | BP | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03334-B- | 0.33 | J, K | BP | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03394-B- | 0.39 | J, K | BP | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03474-B- | 0.47 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03474-B- | 0.47 | J, K | BP | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03564-B- | 0.56 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03564-B- | 0.56 | J, K | BP | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03684-B- | 0.68 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470X03684-B- | 0.68 | K, M | BX | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03824-B- | 0.82 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03824-B- | 0.82 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03105-B- | 1 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03105-B- | 1 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03125-B- | 1.2 | J, K | BP | 3 | N, L, M, J, K | .660 (16.76) |
| -49470X03125-B- | 1.2 | K, M | BX | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03155-B- | 1.5 | J, K | BP | 3 | N, L, M, J, K | .660 (16.76) |
| -49470X03155-B- | 1.5 | K, M | BX | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03185-B- | 1.8 | J, K | BP | 3 | N, L, M, J, K | .800 (20.32) |
| -49470P03185-B- | 1.8 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03185-B- | 1.8 | K, M | BX | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03225-B- | 2.2 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03225-B- | 2.2 | K, M | BX | 5 | N, L, M, J, K | .660 (16.76) |
| -49470X03225-B- | 2.2 | K, M | BX | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03275-B- | 2.7 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03275-B- | 2.7 | K, M | BX | 5 | N, L, M, J, K | .660 (16.76) |
| -49470P03335-B- | 3.3 | J, K | BP | 1 | N, L, M, J, K | .800 (20.32) |
| -49470P03335-B- | 3.3 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03335-B- | 3.3 | K, M | BX | 5 | N, L, M, J, K | .800 (20.32) |
| -49470X03335-B- | 3.3 | K, M | BX | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03395-B- | 3.9 | J, K | BP | 2 | N, L, M, J, K | .660 (16.76) |
| -49470X03395-B- | 3.9 | K, M | BX | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03475-B- | 4.7 | J, K | BP | 2 | N, L, M, J, K | .800 (20.32) |
| -49470X03475-B- | 4.7 | K, M | BX | 4 | N, L, M, J, K | .530 (13.46) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 100 V | | | | | | |
| -49470P03565-B- | 5.6 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03565-B- | 5.6 | K, M | BX | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03685-B- | 6.8 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03685-B- | 6.8 | K, M | BX | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03825-B- | 8.2 | J, K | BP | 6 | N, L, M, J, K | .660 (16.76) |
| -49470X03825-B- | 8.2 | K, M | BX | 4 | N, L, M, J, K | .800 (20.32) |
| -49470X03825-B- | 8.2 | K, M | BX | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03106-B- | 10 | J, K | BP | 6 | N, L, M, J, K | .800 (20.32) |
| -49470X03106-B- | 10 | K, M | BX | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03126-B- | 12 | J, K | BP | 6 | N, L, M, J, K | .800 (20.32) |
| -49470X03126-B- | 12 | K, M | BX | 3 | N, L, M, J, K | .390 (9.91) |
| -49470X03156-B- | 15 | K, M | BX | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03186-B- | 18 | K, M | BX | 3 | N, L, M, J, K | .530 (13.46) |
| -49470X03226-B- | 22 | K, M | BX | 3 | N, L, M, J, K | .660 (16.76) |
| -49470X03276-B- | 27 | K, M | BX | 3 | N, L, M, J, K | .800 (20.32) |
| -49470X03276-B- | 27 | K, M | BX | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03336-B- | 33 | K, M | BX | 1 | N, L, M, J, K | .530 (13.46) |
| -49470X03336-B- | 33 | K, M | BX | 2 | A, B, D, C, F | .390 (9.91) |
| -49470X03396-B- | 39 | K, M | BX | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03396-B- | 39 | K, M | BX | 2 | A, B, D, C, F | .530 (13.46) |
| -49470X03476-B- | 47 | K, M | BX | 1 | N, L, M, J, K | .660 (16.76) |
| -49470X03476-B- | 47 | K, M | BX | 2 | A, B, D, C, F | .530 (13.46) |
| -49470X03566-B- | 56 | K, M | BX | 1 | N, L, M, J, K | .800 (20.32) |
| -49470X03686-B- | 68 | K, M | BX | 2 | N, L, M, J, K | .660 (16.76) |
| -49470X03826-B- | 82 | K, M | BX | 2 | N, L, M, J, K | .800 (20.32) |
| -49470X03107-B- | 100 | K, M | BX | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03127-B- | 120 | K, M | BX | 6 | N, L, M, J, K | .530 (13.46) |
| -49470X03157-B- | 150 | K, M | BX | 6 | N, L, M, J, K | .660 (16.76) |
| -49470X03187-B- | 180 | K, M | BX | 6 | N, L, M, J, K | .800 (20.32) |
| 200V | | | | | | |
| -49470P03223-C- | 0.022 | J, K | BP | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03273-C- | 0.027 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03333-C- | 0.033 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03393-C- | 0.039 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03473-C- | 0.047 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03563-C- | 0.056 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03683-C- | 0.068 | J, K | BP | 5 | N, L, M, J, K | .660 (16.76) |
| -49470P03683-C- | 0.068 | J, K | BP | 4 | A, B, D, C, F | .270 (6.86) |
| -49470P03823-C- | 0.082 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03823-C- | 0.082 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 200 V | | | | | | |
| -49470P03104-C- | 0.1 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03104-C- | 0.1 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03124-C- | 0.12 | J, K | BP | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03154-C- | 0.15 | J, K | BP | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03184-C- | 0.18 | J, K | BP | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03224-C- | 0.22 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03274-C- | 0.27 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03274-C- | 0.27 | J, K | BP | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03334-C- | 0.33 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03394-C- | 0.39 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03474-C- | 0.47 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470R03474-C- | 0.47 | K, M | BR | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03564-C- | 0.56 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470R03564-C- | 0.56 | K, M | BR | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03684-C- | 0.68 | J, K | BP | 3 | N, L, M, J, K | .660 (16.76) |
| -49470R03684-C- | 0.68 | K, M | BR | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03824-C- | 0.82 | J, K | BP | 3 | N, L, M, J, K | .800 (20.32) |
| -49470P03824-C- | 0.82 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470R03824-C- | 0.82 | K, M | BR | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03105-C- | 1 | J, K | BP | 3 | N, L, M, J, K | .800 (20.32) |
| -49470P03105-C- | 1 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470R03105-C- | 1 | K, M | BR | 5 | N, L, M, J, K | .660 (16.76) |
| -49470R03105-C- | 1 | K, M | BR | 4 | A, B, D, C, F | .270 (6.86) |
| -49470P03125-C- | 1.2 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470P03125-C- | 1.2 | J, K | BP | 2 | A, B, D, C, F | .530 (13.46) |
| -49470R03125-C- | 1.2 | K, M | BR | 5 | N, L, M, J, K | .660 (16.76) |
| -49470R03125-C- | 1.2 | K, M | BR | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03155-C- | 1.5 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470P03155-C- | 1.5 | J, K | BP | 2 | A, B, D, C, F | .530 (13.46) |
| -49470R03155-C- | 1.5 | K, M | BR | 5 | N, L, M, J, K | .800 (20.32) |
| -49470R03155-C- | 1.5 | K, M | BR | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03185-C- | 1.8 | J, K | BP | 1 | N, L, M, J, K | .800 (20.32) |
| -49470P03185-C- | 1.8 | J, K | BP | 2 | A, B, D, C, F | .660 (16.76) |
| -49470R03185-C- | 1.8 | K, M | BR | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03225-C- | 2.2 | J, K | BP | 2 | N, L, M, J, K | .660 (16.76) |
| -49470R03225-C- | 2.2 | K, M | BR | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03275-C- | 2.7 | J, K | BP | 2 | N, L, M, J, K | .800 (20.32) |
| -49470R03275-C- | 2.7 | K, M | BR | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03335-C- | 3.3 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470R03335-C- | 3.3 | K, M | BR | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03395-C- | 3.9 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 200 V | | | | | | |
| -49470R03395-C- | 3.9 | K, M | BR | 4 | N, L, M, J, K | .800 (20.32) |
| -49470R03395-C- | 3.9 | K, M | BR | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03475-C- | 4.7 | J, K | BP | 6 | N, L, M, J, K | .660 (16.76) |
| -49470R03475-C- | 4.7 | K, M | BR | 3 | N, L, M, J, K | .390 (9.91) |
| -49470P03565-C- | 5.6 | J, K | BP | 6 | N, L, M, J, K | .800 (20.32) |
| -49470R03565-C- | 5.6 | K, M | BR | 3 | N, L, M, J, K | .390 (9.91) |
| -49470R03685-C- | 6.8 | K, M | BR | 3 | N, L, M, J, K | .530 (13.46) |
| -49470R03825-C- | 8.2 | K, M | BR | 3 | N, L, M, J, K | .530 (13.46) |
| -49470R03106-C- | 10 | K, M | BR | 3 | N, L, M, J, K | .660 (16.76) |
| -49470R03126-C- | 12 | K, M | BR | 3 | N, L, M, J, K | .800 (20.32) |
| -49470R03126-C- | 12 | K, M | BR | 2 | A, B, D, C, F | .390 (9.91) |
| -49470R03156-C- | 15 | K, M | BR | 1 | N, L, M, J, K | .530 (13.46) |
| -49470R03156-C- | 15 | K, M | BR | 2 | A, B, D, C, F | .390 (9.91) |
| -49470R03186-C- | 18 | K, M | BR | 1 | N, L, M, J, K | .660 (16.76) |
| -49470R03186-C- | 18 | K, M | BR | 2 | A, B, D, C, F | .530 (13.46) |
| -49470R03226-C- | 22 | K, M | BR | 1 | N, L, M, J, K | .800 (20.32) |
| -49470R03226-C- | 22 | K, M | BR | 2 | A, B, D, C, F | .530 (13.46) |
| -49470R03276-C- | 27 | K, M | BR | 1 | N, L, M, J, K | .800 (20.32) |
| -49470R03276-C- | 27 | K, M | BR | 2 | A, B, D, C, F | .660 (16.76) |
| -49470R03336-C- | 33 | K, M | BR | 2 | N, L, M, J, K | .660 (16.76) |
| -49470R03396-C- | 39 | K, M | BR | 2 | N, L, M, J, K | .800 (20.32) |
| -49470R03476-C- | 47 | K, M | BR | 6 | N, L, M, J, K | .390 (9.91) |
| -49470R03566-C- | 56 | K, M | BR | 6 | N, L, M, J, K | .530 (13.46) |
| -49470R03686-C- | 68 | K, M | BR | 6 | N, L, M, J, K | .530 (13.46) |
| -49470R03826-C- | 82 | K, M | BR | 6 | N, L, M, J, K | .660 (16.76) |
| -49470R03107-C- | 100 | K, M | BR | 6 | N, L, M, J, K | .800 (20.32) |
| -49470R03127-C- | 120 | K, M | BR | 6 | N, L, M, J, K | .800 (20.32) |
| 500V | | | | | | |
| -49470P03103-E- | 0.01 | J, K | BP | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03123-E- | 0.012 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03153-E- | 0.015 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03183-E- | 0.018 | J, K | BP | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03223-E- | 0.022 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03273-E- | 0.027 | J, K | BP | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03333-E- | 0.033 | J, K | BP | 5 | N, L, M, J, K | .660 (16.76) |
| -49470P03333-E- | 0.033 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03393-E- | 0.039 | J, K | BP | 5 | N, L, M, J, K | .660 (16.76) |
| -49470P03393-E- | 0.039 | J, K | BP | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03473-E- | 0.047 | J, K | BP | 5 | N, L, M, J, K | .800 (20.32) |
| -49470P03473-E- | 0.047 | J, K | BP | 4 | A, B, D, C, F | .530 (13.46) |
| -49470P03563-E- | 0.056 | J, K | BP | 4 | N, L, M, J, K | .530 (13.46) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 500 V | | | | | | |
| -49470P03683-E- | 0.068 | J, K | BP | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03823-E- | 0.082 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03104-E- | 0.1 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03124-E- | 0.12 | J, K | BP | 4 | N, L, M, J, K | .800 (20.32) |
| -49470P03124-E- | 0.12 | J, K | BP | 3 | A, B, D, C, F | .390 (9.91) |
| -49470P03154-E- | 0.15 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470Q03154-E- | 0.15 | K, M | BQ | 5 | N, L, M, J, K | .270 (6.86) |
| -49470P03184-E- | 0.18 | J, K | BP | 3 | N, L, M, J, K | .390 (9.91) |
| -49470Q03184-E- | 0.18 | K, M | BQ | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03224-E- | 0.22 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470Q03224-E- | 0.22 | K, M | BQ | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03274-E- | 0.27 | J, K | BP | 3 | N, L, M, J, K | .530 (13.46) |
| -49470Q03274-E- | 0.27 | K, M | BQ | 5 | N, L, M, J, K | .390 (9.91) |
| -49470P03334-E- | 0.33 | J, K | BP | 3 | N, L, M, J, K | .660 (16.76) |
| -49470Q03334-E- | 0.33 | K, M | BQ | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03394-E- | 0.39 | J, K | BP | 3 | N, L, M, J, K | .800 (20.32) |
| -49470P03394-E- | 0.39 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470Q03394-E- | 0.39 | K, M | BQ | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03474-E- | 0.47 | J, K | BP | 1 | N, L, M, J, K | .530 (13.46) |
| -49470P03474-E- | 0.47 | J, K | BP | 2 | A, B, D, C, F | .390 (9.91) |
| -49470Q03474-E- | 0.47 | K, M | BQ | 5 | N, L, M, J, K | .530 (13.46) |
| -49470P03564-E- | 0.56 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470P03564-E- | 0.56 | J, K | BP | 2 | A, B, D, C, F | .530 (13.46) |
| -49470Q03564-E- | 0.56 | K, M | BQ | 5 | N, L, M, J, K | .660 (16.76) |
| -49470Q03564-E- | 0.56 | K, M | BQ | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03684-E- | 0.68 | J, K | BP | 1 | N, L, M, J, K | .660 (16.76) |
| -49470P03684-E- | 0.68 | J, K | BP | 2 | A, B, D, C, F | .530 (13.46) |
| -49470Q03684-E- | 0.68 | K, M | BQ | 5 | N, L, M, J, K | .800 (20.32) |
| -49470Q03684-E- | 0.68 | K, M | BQ | 4 | A, B, D, C, F | .390 (9.91) |
| -49470P03824-E- | 0.82 | J, K | BP | 1 | N, L, M, J, K | .800 (20.32) |
| -49470P03824-E- | 0.82 | J, K | BP | 2 | A, B, D, C, F | .660 (16.76) |
| -49470Q03824-E- | 0.82 | K, M | BQ | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03105-E- | 1 | J, K | BP | 2 | N, L, M, J, K | .660 (16.76) |
| -49470Q03105-E- | 1 | K, M | BQ | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03125-E- | 1.2 | J, K | BP | 2 | N, L, M, J, K | .800 (20.32) |
| -49470Q03125-E- | 1.2 | K, M | BQ | 4 | N, L, M, J, K | .530 (13.46) |
| -49470P03155-E- | 1.5 | J, K | BP | 6 | N, L, M, J, K | .530 (13.46) |
| -49470Q03155-E- | 1.5 | K, M | BQ | 4 | N, L, M, J, K | .660 (16.76) |
| -49470P03185-E- | 1.8 | J, K | BP | 6 | N, L, M, J, K | .660 (16.76) |
| -49470Q03185-E- | 1.8 | K, M | BQ | 4 | N, L, M, J, K | .800 (20.32) |
| -49470Q03185-E- | 1.8 | K, M | BQ | 3 | A, B, D, C, F | .390 (9.91) |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance µF | Capacitance tolerance | Characteristic | Case code | Config. | Maximum A dimension inch (mm) |
|---|---|---|---|---|---|---|
| 500 V | | | | | | |
| -49470P03225-E- | 2.2 | J, K | BP | 6 | N, L, M, J, K | .800 (20.32) |
| -49470Q03225-E- | 2.2 | K, M | BQ | 3 | N, L, M, J, K | .390 (9.91) |
| -49470Q03275-E- | 2.7 | K, M | BQ | 3 | N, L, M, J, K | .530 (13.46) |
| -49470Q03335-E- | 3.3 | K, M | BQ | 3 | N, L, M, J, K | .530 (13.46) |
| -49470Q03395-E- | 3.9 | K, M | BQ | 3 | N, L, M, J, K | .530 (13.46) |
| -49470Q03475-E- | 4.7 | K, M | BQ | 3 | N, L, M, J, K | .660 (16.76) |
| -49470Q03565-E- | 5.6 | K, M | BQ | 3 | N, L, M, J, K | .800 (20.32) |
| -49470Q03565-E- | 5.6 | K, M | BQ | 2 | A, B, D, C, F | .390 (9.91) |
| -49470Q03685-E- | 6.8 | K, M | BQ | 1 | N, L, M, J, K | .660 (16.76) |
| -49470Q03685-E- | 6.8 | K, M | BQ | 2 | A, B, D, C, F | .390 (9.91) |
| -49470Q03825-E- | 8.2 | K, M | BQ | 1 | N, L, M, J, K | .660 (16.76) |
| -49470Q03825-E- | 8.2 | K, M | BQ | 2 | A, B, D, C, F | .530 (13.46) |
| -49470Q03106-E- | 10 | K, M | BQ | 1 | N, L, M, J, K | .660 (16.76) |
| -49470Q03106-E- | 10 | K, M | BQ | 2 | A, B, D, C, F | .530 (13.46) |
| -49470Q03126-E- | 12 | K, M | BQ | 1 | N, L, M, J, K | .800 (20.32) |
| -49470Q03126-E- | 12 | K, M | BQ | 2 | A, B, D, C, F | .660 (16.76) |
| -49470Q03156-E- | 15 | K, M | BQ | 2 | N, L, M, J, K | .800 (20.32) |
| -49470Q03186-E- | 18 | K, M | BQ | 2 | N, L, M, J, K | .800 (20.32) |
| -49470Q03226-E- | 22 | K, M | BQ | 6 | N, L, M, J, K | .530 (13.46) |
| -49470Q03276-E- | 27 | K, M | BQ | 6 | N, L, M, J, K | .530 (13.46) |
| -49470Q03336-E- | 33 | K, M | BQ | 6 | N, L, M, J, K | .660 (16.76) |
| -49470Q03396-E- | 39 | K, M | BQ | 6 | N, L, M, J, K | .800 (20.32) |

1/ Complete PIN shall include additional symbols to indicate product level (M for B level, or T for T level), capacitance tolerance and configuration.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - MC
Air Force - 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-2103)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.