
MILITARY SPECIFICATION SHEET

CABLE, ELECTRIC, AEROSPACE VEHICLE, MIL-W-81381/13 BASIC WIRES, COPPER SHIELD, FEP-POLYIMIDE TAPE JACKET, 600-VOLT, 150°C

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the issues in effect of Specification MIL-C-7078 and Specification Sheet MIL-W-81381/13.

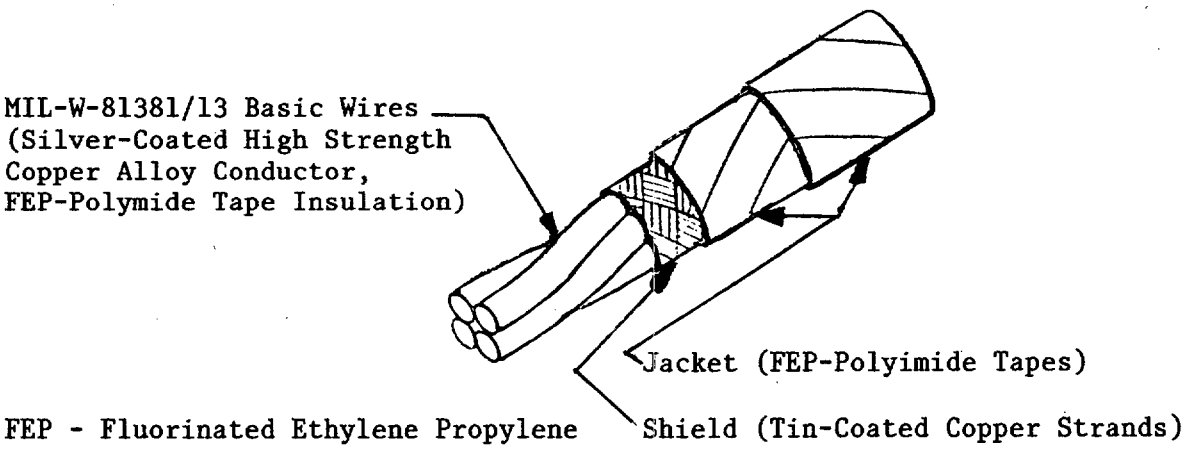

FEP - Fluorinated Ethylene Propylene

SHIELDED JACKETED CABLE

REQUIREMENTS:
CONSTRUCTION DETAILS: See above Figure and Table I
VOLTAGE RATING: 600 Volts (rms), at sea level
(A) TEMPERATURE RATING: 150°C (302°F) max conductor temperature
COLD BEND: Required
WET DIELECTRIC TEST AFTER COLD BEND: 1000 Volts (rms)
THERMAL SHOCK TEST: 230 ±2°C (446 ±3.6°F) See Note 1.
HEAT RESISTANCE: Required. Test temperature, 230 ±2°C (446 ±3.6°F) See Note 1. Supplementary wet dielectric test not required.
JACKET FLAWS (SPARK TEST): 1500 volts (rms)
DRY DIELECTRIC: 2500 volts (rms)

(Requirements continued on Page 3)

(A) denotes changes

FSC 6154

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:58Z
Check the source to verify that this is the current version before use.

TABLE I

Cable part no.	Gage of shield strands (AWG)	Thickness of taped jacket (inch)(min)	Major diameter of shielded jacketed cable (inch)(max)	Weight of shielded jacketed cable (lb/1000 ft)	
				(nom) 1/	(max)
M7078/10-26-1	38	.0035	.067	4.3	4.4
M7078/10-26-2			.110	7.2	7.4
M7078/10-26-3			.116	9.2	9.5
M7078/10-26-4			.125	12.0	12.4
M7078/10-26-5			.136	14.0	14.6
M7078/10-26-6			.147	16.2	16.8
M7078/10-26-7			.147	17.7	18.4
M7078/10-24-1			.072	5.2	5.4
M7078/10-24-2			.120	9.7	10.1
M7078/10-24-3			.127	11.6	12.7
M7078/10-24-4			.138	15.2	15.8
M7078/10-24-5			.150	17.9	18.6
M7078/10-24-6			.162	20.8	21.7
M7078/10-24-7			.162	23.0	23.9
M7078/10-22-1			.078	6.6	6.8
M7078/10-22-2			.132	11.5	11.9
M7079/10-22-3			.140	15.3	15.8
M7078/10-22-4			.152	20.0	20.7
M7078/10-22-5			.166	24.0	24.7
M7078/10-22-6			.180	27.9	28.8
M7078/10-22-7			.180	31.0	32.1
M7078/10-20-1			.086	8.7	8.9
M7078/10-20-2			.148	15.6	16.0
M7078/10-20-3			.157	21.1	21.6
M7078/10-20-4			.172	27.7	28.5
M7078/10-20-5			.187	33.3	34.3
M7078/10-20-6			.204	39.0	40.3
M7078/10-20-7	38	.0035	.204	43.7	45.2

1/ Nominal values are given for information only. Nominal values are not requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (Continued):

(A) SHIELD STRAND ADHESION: Metallic adhesion (blocking) between the tin-coated strands of the cable shield in the initial or "as received" condition shall be cause for rejection of the cable. In quality conformance inspection, shield strand adhesion shall be a Group I characteristic, one specimen to be examined from each sample unit.

PART NUMBER: Part numbers in this specification sheet are coded as in the following example:

M7078/10	-	24	-	1
specification sheet number		size number of basic wires		quantity of conductors (basic wires) in cable

Note 1: The temperature specified for thermal shock test and heat resistance test in this specification sheet exceeds the service temperature of tin-coated copper and is intended for testing of the cable jacket only. Discoloration or metallic adhesion of tin-coated shield strands due to these tests shall not be cause for rejection.

☆U.S. GOVERNMENT PRINTING OFFICE:1978-703-122/3147

Preparing activity:
Navy - AS
(Project No. 6145-N280-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-7078/10A(AS) Cable, Electric, Aerospace Vehicle, ... etc.

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:58Z
Check the source to verify that this is the current version before use.