INCH-POUND


MIL-C-85049/5B
24 November 1992
SUPERSEDING
MIL-C-85049/5A
28 June 1988

MILITARY SPECIFICATION SHEET

# CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, STEP-DOWN, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

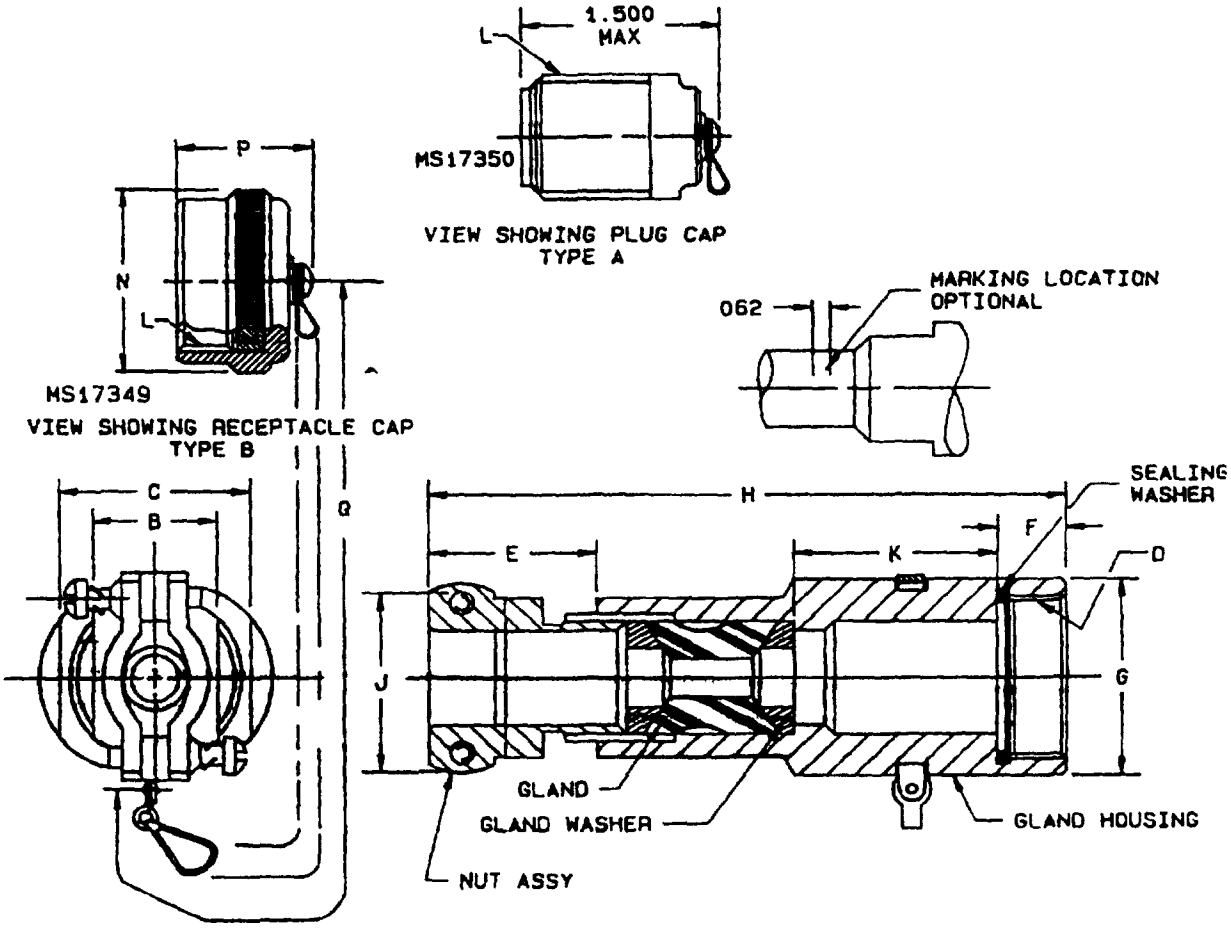


Configuration A. Style 1 cable sealing.

FIGURE 1 Configurations and dimensions.

(B) denotes changes



AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1A Style 1 cable sealing - Continued

| Size number | Shell size | Cable range | | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|---|---|
| | | Min dia | Max dia | + 000 - 010 | + 000 - 010 | thread class 2B-LH | free length max | + 016 | dia + 010 - 020 |
| 1 | 12 | .156 | .250 | .625 | .812 | .7500-20 UNEF | 906 | 479 | 938 |
| 2 | 18 | 281 | .375 | .750 | 1.125 | 1.1250-18 NEF | .969 | 479 | 1.312 |
| 3 | 18 | 281 | .375 | .875 | 1 125 | 1.1250-18 NEF | 969 | 479 | 1.312 |
| 4 | 18 | .188 | .281 | .750 | 1 125 | 1.1250-18 NEF | .969 | 479 | 1 312 |
| 5 | 18 | .511 | .605 | 1.000 | 1.125 | 1.1250-18 NEF | 1 062 | 479 | 1.312 |
| 6 | 18 | 436 | .530 | 1.000 | 1 125 | 1.1250-18 NEF | 1 062 | 479 | 1.312 |
| 7 | 20 | .605 | .699 | 1.062 | 1.250 | 1.2500-18 NEF | 1 062 | .479 | 1 438 |
| 8 | 20 | 361 | .455 | 1.062 | 1.250 | 1 2500-18 NEF | 1 062 | 479 | 1 438 |
| 9 | 20 | .511 | .605 | 1.000 | 1.250 | 1 2500-18 NEF | 1.062 | 479 | 1 438 |
| 10 | 22 | .449 | .562 | 1 188 | 1 406 | 1 3750-18 NEF | 1.094 | .479 | 1 562 |
| 11 | 22 | .311 | 405 | 1.000 | 1.375 | 1 3750-18 NEF | 1.062 | .479 | 1 562 |
| 12 | 22 | .715 | .828 | 1.188 | 1 406 | 1.3750-18 NEF | 1 094 | 479 | 1 562 |
| 13 | 24 | .787 | .900 | 1.312 | 1.625 | 1.6250-18 NEF | 1 094 | .479 | 1 812 |
| 14 | 24 | .517 | .630 | 1.312 | 1.625 | 1 6250-18 NEF | 1 094 | 479 | 1 812 |
| 15 | 24 | .637 | .750 | 1 312 | 1 625 | 1 6250-18 NEF | 1.094 | 479 | 1 812 |
| 16 | 24 | 857 | 970 | 1 312 | 1 625 | 1 6250-18 NEF | 1 094 | 479 | 1.812 |
| 17 | 24 | 715 | 828 | 1.188 | 1 625 | 1 6250-18 NEF | 1 094 | 479 | 1 812 |
| 18 | 24 | .692 | .805 | 1.312 | 1 625 | 1 6250-18 NEF | 1 094 | 479 | 1 812 |
| 19 | 28 | .755 | .880 | 1.546 | 1 875 | 1.8750-16 UN | 1.281 | 479 | 2 062 |
| 20 | 28 | 984 | 1 109 | 1.546 | 1 875 | 1.8750-16 UN | 1.281 | 479 | 2.062 |
| 21 | 28 | 637 | 750 | 1.312 | 1 875 | 1.8750-16 UN | 1.094 | .479 | 2.062 |
| 22 | 28 | 281 | 375 | 0.875 | 1 875 | 1 8750-16 UN | 0.969 | 479 | 2.062 |
| 23 | 28 | .857 | 970 | 1.312 | 1.875 | 1.8750-16 UN | 1.094 | 479 | 2.062 |
| 24 | 28 | 875 | 1 000 | 1 546 | 1 875 | 1 8750-16 UN | 1.281 | 479 | 2.062 |
| 25 | 28 | .436 | .530 | 1 000 | 1 812 | 1 8750-16 UN | 1.062 | 479 | 2 062 |
| 26 | 28 | 567 | 680 | 1 312 | 1 875 | 1 8750-16 UN | 1.094 | 479 | 2 062 |
| 27 | 32 | 930 | 1.055 | 1.546 | 2 062 | 2 0625-16 N | 1.281 | 479 | 2 312 |
| 28 | 32 | 1.150 | 1.230 | 1.780 | 2 062 | 2 0625-16 N | 1.281 | .479 | 2 312 |
| 29 | 32 | 637 | 750 | 1.312 | 2.062 | 2 0625-16 N | 1.094 | 479 | 2 312 |
| 30 | 32 | 755 | 880 | 1.546 | 2 062 | 2 0625-16 N | 1.281 | .479 | 2 312 |
| 31 | 32 | 984 | 1 109 | 1 546 | 2 062 | 2 0625-16 N | 1 281 | 479 | 2 312 |
| 32 | 32 | .857 | 970 | 1 312 | 2.062 | 2 0625-16 N | 1.094 | 479 | 2 312 |
| 33 | 32 | .281 | 375 | .875 | 2.062 | 2 0625-16 N | .969 | 479 | 2 312 |
| 34 | 32 | .436 | 530 | 1.000 | 2.000 | 2.0625-16 N | 1.062 | 479 | 2 312 |
| 35 | 32 | 1.005 | 1.130 | 1 780 | 2.062 | 2 0625-16 N | 1.281 | 479 | 2.312 |
| 36 | 36 | 1.185 | 1.310 | 1.780 | 2.312 | 2.3125-16 N | 1.281 | 479 | 2.562 |
| 37 | 36 | 984 | 1.109 | 1.546 | 2 312 | 2.3125-16 N | 1.281 | 479 | 2.562 |
| 38 | 36 | 1.250 | 1.375 | 2.000 | 2 312 | 2 3125-16 N | 1.281 | .479 | 2.562 |
| 39 | 36 | 1.055 | 1.180 | 1.780 | 2 312 | 2.3125-16 N | 1.281 | 479 | 2.562 |
| 40 | 36 | 1.320 | 1.445 | 2.000 | 2.312 | 2.3125-16 N | 1.281 | .479 | 2.562 |
| 41 | 36 | .857 | 970 | 1.312 | 2 250 | 2 3125-16 N | 1.094 | .479 | 2.562 |
| 42 | 36 | 1 105 | 1 230 | 1.780 | 2 312 | 2 3125-16 N | 1 281 | 479 | 2 562 |
| 43 | 40 | 1.815 | 1 940 | 2.438 | 2.750 | 2.6250-16 UN | 1.391 | 667 | 2.875 |
| 44 | 40 | 1.700 | 1 825 | 2 438 | 2 750 | 2.6250-16 UN | 1.391 | 667 | 2.875 |
| 45 | 40 | 1 605 | 1.730 | 2 438 | 2 750 | 2.6250-16 UN | 1.391 | 667 | 2 875 |
| 46 | 40 | 1 531 | 1 656 | 2 250 | 2 750 | 2 6250-16 UN | 1 281 | 667 | 2 875 |
| 47 | 44 | 1 867 | 2.000 | 2.750 | 2.969 | 2 8750-16 UN | 1 382 | 667 | 3.125 |
| 48 | 44 | 1 775 | 1 900 | 2 438 | 2.812 | 2 8750-16 UN | 1.382 | 667 | 3 125 |

(B) FIGURE 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.


Configuration 1A Style 1 cable sealing - Continued

| Size number | Shell size | H max | J +.031 | K + 015 -.025 | L thread (plated) class 2 (A or B) | N dia max | P max | Q within one link |
|---|---|---|---|---|---|---|---|---|
| 1 | 12 | 3 182 | 0 938 | .563 | .8750-0.1P-0.2L-DS | 1.094 | .765 | 5 00 |
| 2 | 18 | 3 901 | 1.062 | 1.157 | 1 2500-0 1P-0.2L-DS | 1 469 | 980 | 5 00 |
| 3 | 18 | 3.932 | 1.125 | 1.125 | 1.2500-0.1P-0.2L-DS | 1 469 | .980 | 5 00 |
| 4 | 18 | 3.901 | 1.062 | 1.157 | 1.2500-0.1P-0.2L-DS | 1.469 | .980 | 5.00 |
| 5 | 18 | 4 177 | 1.375 | 1.121 | 1.2500-0.1P-0.2L-DS | 1 469 | .980 | 5 00 |
| 6 | 18 | 4.177 | 1.375 | 1.121 | 1.2500-0.1P-0.2L-DS | 1 469 | .980 | 5 00 |
| 7 | 20 | 4 489 | 1.562 | 1.371 | 1.3750-0.1P-0.2L-DS | 1.562 | 980 | 5 00 |
| 8 | 20 | 4 489 | 1.562 | 1 371 | 1.2500-0.1P-0.2L-DS | 1.562 | .980 | 5.00 |
| 9 | 20 | 4.306 | 1.375 | 1.250 | 1 2500-0.1P-0.2L-DS | 1 562 | 980 | 5.00 |
| 10 | 22 | 4.584 | 1.688 | 1.343 | 1.5000-0.1P-0.2L-DS | 1.688 | .980 | 6.00 |
| 11 | 22 | 4 306 | 1.375 | 1.250 | 1.5000-0.1P-0.2L-DS | 1.688 | .980 | 6 00 |
| 12 | 22 | 4 306 | 1 375 | 1.250 | 1 5000-0.1P-0 2L-DS | 1 688 | 980 | 6.00 |
| 13 | 24 | 4.647 | 1 812 | 1.371 | 1 7500-0.1P-0.2L-DS | 1 938 | 980 | 6.00 |
| 14 | 24 | 4.647 | 1.812 | 1.371 | 1.7500-0.1P-0.2L-DS | 1 938 | 980 | 6.00 |
| 15 | 24 | 4.647 | 1.812 | 1.371 | 1 7500-0.1P-0 2L-DS | 1 938 | 980 | 6 00 |
| 16 | 24 | 4 647 | 1.812 | 1.371 | 1.7500-0.1P-0.2L-DS | 1.938 | .980 | 6.00 |
| 17 | 24 | 4 542 | 1 688 | 1 301 | 1 7500-0.1P-0 2L-DS | 1.938 | .980 | 6.00 |
| 18 | 24 | 4.647 | 1.812 | 1.371 | 1 7500-0 1P-0 2L-DS | 1 938 | 980 | 6.00 |
| 19 | 28 | 4 896 | 2.125 | 1.371 | 2.0000-0.1P-0 2L-DS | 2 219 | 980 | 6 00 |
| 20 | 28 | 4 896 | 2 125 | 1.371 | 2 0000-0.1P-0.2L-DS | 2.219 | .980 | 6.00 |
| 21 | 28 | 4 647 | 1 812 | 1.371 | 2 0000-0.1P-0.2L-DS | 2 219 | .980 | 6.00 |
| 22 | 28 | 4 229 | 1 125 | 1 422 | 2 0000-0.1P-0.2L-DS | 2 219 | 980 | 6 00 |
| 23 | 28 | 4.647 | 1 812 | 1.371 | 2.0000-0.1P-0.2L-DS | 2 219 | .980 | 6.00 |
| 24 | 28 | 4.896 | 2.125 | 1.371 | 2.0000-0.1P-0.2L-DS | 2 219 | 980 | 6.00 |
| 25 | 28 | 4.431 | 1.375 | 1.375 | 2.0000-0.1P-0 2L-DS | 2.219 | 980 | 6.00 |
| 26 | 28 | 4 647 | 1.812 | 1.371 | 2.0000-0 1P-0 2L-DS | 2 219 | 980 | 6 00 |
| 27 | 32 | 4.896 | 2.125 | 1.371 | 2.2500-0.1P-0 2L-DS | 2 469 | 980 | 6 00 |
| 28 | 32 | 4 959 | 2 469 | 1 372 | 2 2500-0.1P-0 2L-DS | 2 469 | 980 | 6 00 |
| 29 | 32 | 4.647 | 1.812 | 1.371 | 2.2500-0 1P-0 2L-DS | 2.469 | .980 | 6.00 |
| 30 | 32 | 4 896 | 2.125 | 1 371 | 2.2500-0 1P-0 2L-DS | 2 469 | 980 | 6.00 |
| 31 | 32 | 4 896 | 2.125 | 1.371 | 2.2500-0 1P-0.2L-DS | 2 469 | .980 | 6.00 |
| 32 | 32 | 4 647 | 1.812 | 1.371 | 2.2500-0 1P-0.2L-DS | 2 469 | 980 | 6.00 |
| 33 | 32 | 4 276 | 1 125 | 1 469 | 2 2500-0 1P-0 2L-DS | 2 469 | .980 | 6.00 |
| 34 | 32 | 4 431 | 1 375 | 1 375 | 2 2500-0.1P-0 2L-DS | 2 469 | .980 | 6.00 |
| 35 | 32 | 4.959 | 2.469 | 1 372 | 2.2500-0.1P-0 2L-DS | 2 469 | 980 | 6 00 |
| 36 | 36 | 4.959 | 2.469 | 1 372 | 2.2500-0 1P-0 2L-DS | 2 719 | .980 | 6 00 |
| 37 | 36 | 4.896 | 2.125 | 1.371 | 2.2500-0.1P-0.2L-DS | 2.719 | .980 | 6.00 |
| 38 | 36 | 5.021 | 2.625 | 1.371 | 2.2500-0.1P-0 2L-DS | 2 719 | 980 | 6 00 |
| 39 | 36 | 4.959 | 2 469 | 1 372 | 2.2500-0 1P-0 2L-DS | 2 719 | 980 | 6.00 |
| 40 | 36 | 5 021 | 2 625 | 1.371 | 2 2500-0.1P-0 2L-DS | 2 719 | .980 | 6.00 |
| 41 | 36 | 4 651 | 1.812 | 1 375 | 2 2500-0 1P-0.2L-DS | 2 719 | .980 | 6.00 |
| 42 | 36 | 4 959 | 2 469 | 1 372 | 2 2500-0 1P-0 2L-DS | 2 179 | 980 | 6 00 |
| 43 | 40 | 6 354 | 3 171 | 2 156 | 2 7500-0 1P-0.2L-DS | 2 969 | 980 | 6 00 |
| 44 | 40 | 6 354 | 3 171 | 2 156 | 2 7500-0 1P-0 2L-DS | 2 969 | 980 | 6 00 |
| 45 | 40 | 6.354 | 3 171 | 2.156 | 2.7500-0 1P-0 2L-DS | 2 969 | 980 | 6 00 |
| 46 | 40 | 6 057 | 2.953 | 2.156 | 2.7500-0.1P-0.2L-DS | 2 969 | 980 | 6 00 |
| 47 | 44 | 6 345 | 3 375 | 2 156 | 3 0000-0 1P-0 2L-DS | 3 217 | 980 | 6 00 |
| 48 | 44 | 5 266 | 3 171 | 1 078 | 3 0000-0.1P-0.2L-DS | 3 217 | 980 | 6 00 |

(8) FIGURE 1 Configuration and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

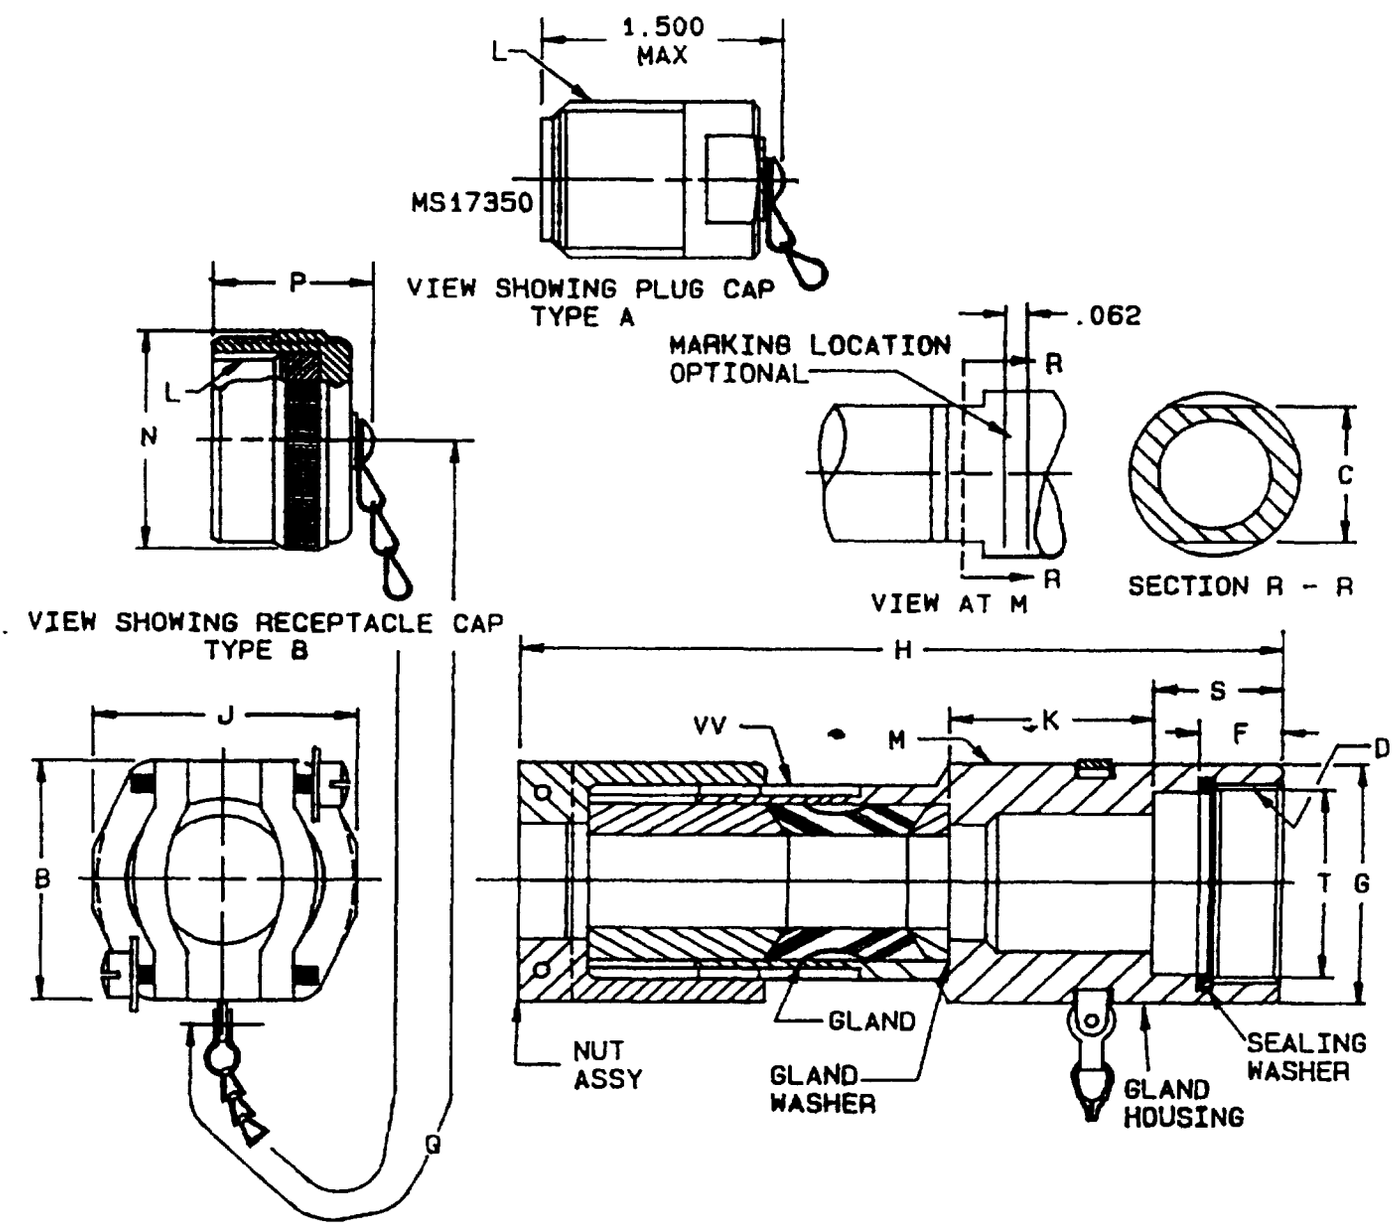


Configuration 1B Style 2 cable sealing

FIGURE 1. Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1B. Style 2 cable sealing - Continued.

| Size number | Shell size | Cable range | | B | C | D | F | G | H | J |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Min dia | Max dia | +.005 | +.000 -.010 | thread class 2B-LH | + 016 | dia +.010 - 020 | max | max |
| 1 | 12 | .130 | .280 | .969 | .812 | .7500-20 UNEF | .479 | .938 | 4.000 | 1.100 |
| 2 | 14 | .246 | .396 | 1 094 | .938 | 8750-20 UNEF | 479 | 1 062 | 4 100 | 1 110 |
| 3 | 16 | .321 | .521 | 1.219 | 1.062 | 1.0000-20 UNEF | .479 | 1.188 | 4.400 | 1.320 |
| 4 | 18 | .446 | .646 | 1.344 | 1.125 | 1.1250-18 UNEF | .479 | 1.312 | 4.600 | 1.420 |
| 5 | 18 | .300 | .475 | 1.344 | 1.125 | 1.0000-20 UNEF | .479 | 1 312 | 4.600 | 1 420 |
| 6 | 20 | .565 | .765 | 1.469 | 1.250 | 1.3750-18 UNEF | .479 | 1.438 | 4.900 | 1.600 |
| 7 | 20 | .400 | .600 | 1.469 | 1.250 | 1.6250-18 NEF | 479 | 1 438 | 4.900 | 1 600 |
| 8 | 22 | 690 | 890 | 1 625 | 1.375 | 1 6250-18 NEF | .479 | 1.562 | 4 900 | 1 750 |
| 9 | 22 | .500 | 700 | 1 625 | 1.375 | 1 6250-18 NEF | 479 | 1 562 | 4.900 | 1 750 |
| 10 | 22 | 400 | .525 | 1.625 | 1.375 | 1.3750-18 NEF | 479 | 1.562 | 4.900 | 1.750 |
| 11 | 24 | .815 | 1.015 | 1 750 | 1.625 | 1.6250-18 NEF | .479 | 1.812 | 5.000 | 1.900 |
| 12 | 24 | .595 | 815 | 1 750 | 1.625 | 1.6250-18 NEF | 479 | 1.812 | 5 000 | 1 900 |
| 13 | 28 | .980 | 1.180 | 2.000 | 1.875 | 1.6250-18 NEF | .479 | 2.062 | 5.300 | 2.190 |
| 14 | 28 | .780 | .980 | 2 000 | 1 875 | 1.6250-18 UN | 479 | 2.062 | 5.300 | 2.190 |
| 15 | 32 | 1.230 | 1.430 | 2.250 | 2.062 | 2.0625-16 N | .479 | 2.062 | 5.600 | 2.475 |
| 16 | 32 | 1 030 | 1.230 | 2 250 | 2 062 | 2.0625-16 N | 479 | 2.062 | 5.600 | 2 475 |
| 17 | 36 | 1 470 | 1.670 | 2 500 | 2.312 | 2 3125-16 N | 479 | 2.562 | 5 600 | 2 715 |
| 18 | 36 | 1 270 | 1 470 | 2 500 | 2.312 | 2.3125-16 N | .479 | 2.562 | 5.600 | 2.715 |
| 19 | 40 | 1 660 | 1.860 | 2.750 | 2 562 | 2.6250-16 UN | 667 | 2.875 | 5.725 | 2 900 |
| 20 | 40 | 1 400 | 1.660 | 2 750 | 2 562 | 2 6250-16 UN | .667 | 2.875 | 5.725 | 2 900 |

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.


Configuration 1B Style 2 cable sealing - Continued

| Size number | Shell size | K ±.010 | L thread class 2A/B | N dia max | P max | Q within one link | S ± 010 | T dia ± 055 | VV gland threads plated class 2-LH |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 12 | 950 | .8750-0 1P-0.2L-DS | 1.094 | .765 | 5.00 | 1.425 | .600 | .8125-20 UNEF |
| 2 | 14 | 1.075 | 1.0000-0 1P-0.2L-DS | 1 219 | 765 | 5 00 | 1 425 | 726 | .9375-20 UNEF |
| 3 | 16 | 1.200 | 1.1250-0.1P-0.2P-DS | 1.344 | .980 | 5.00 | 1.605 | .845 | 1.0625-18 NEF |
| 4 | 18 | 1.325 | 1.1250-0 1P-0 2L-DS | 1.469 | .980 | 5 00 | 1.605 | .970 | 1.1875-18 NEF |
| 5 | 18 | 1 325 | 1 1250-0.1P-0.2L-DS | 1.469 | .980 | 5.00 | 1.605 | 970 | 1 1875-18 NEF |
| 6 | 20 | 1.325 | 1.3750-0.1P-0.2L-DS | 1.562 | .980 | 5.00 | 1.605 | 1.095 | 1.3125-18 NEF |
| 7 | 20 | 1.325 | 1.3750-0 1P-0.2L-DS | 1 562 | .980 | 5 00 | 1.605 | 1 095 | 1.3125-18 NEF |
| 8 | 22 | 1 325 | 1 5000-0.1P-0 2L-DS | 1.688 | .980 | 6 00 | 1 605 | 1.220 | 1.4375-18 NEF |
| 9 | 22 | 1.325 | 1.5000-0 1P-0 2L-DS | 1 688 | .980 | 6.00 | 1 605 | 1 220 | 1 4375-18 NEF |
| 10 | 22 | 1.325 | 1.5000-0 1P-0.2L-DS | 1 688 | 980 | 6 00 | 1 605 | 1.220 | 1.4375-18 NEF |
| 11 | 24 | 1 450 | 1.5000-0 1P-0 2L-DS | 1.938 | 980 | 6 00 | 1.605 | 1.470 | 1.5625-18 NEF |
| 12 | 24 | 1 450 | 1.5000-0.1P-0.2L-DS | 1.938 | .980 | 6.00 | 1 605 | 1 470 | 1 5625-18 NEF |
| 13 | 28 | 1.700 | 2.0000-0.1P-0.2L-DS | 2.219 | .980 | 6.00 | 1.605 | 1 713 | 1.8125-16 N |
| 14 | 28 | 1 700 | 2.0000-0 1P-0 2L-DS | 2.219 | .980 | 6 00 | 1.605 | 1.713 | 1 8125-16 N |
| 15 | 32 | 1 950 | 2 2500-0 1P-0 2L-DS | 2.469 | .980 | 6.00 | 1 605 | 1 900 | 2 0625-16 N |
| 16 | 32 | 1 950 | 2 2500-0 1P-0 2L-DS | 2 469 | 980 | 6 00 | 1 605 | 1.900 | 2 0625-16 N |
| 17 | 36 | 1.950 | 2.2500-0 1P-0.2L-DS | 2.719 | .980 | 6 00 | 1 605 | 2.150 | 2 3125-16 N |
| 18 | 36 | 1.950 | 2.2500-0 1P-0 2L-DS | 2.719 | .980 | 6.00 | 1 605 | 2 150 | 2.3125-16 N |
| 19 | 40 | 1 950 | 2.7500-0 1P-0.2L-DS | 2 969 | 980 | 6.00 | 1.605 | 2.460 | 2 5000-16 UN |
| 20 | 40 | 1 950 | 2 7500-0 1P-0 2L-DS | 2.969 | 980 | 6 00 | 1 605 | 2.460 | 2 5005-16 UN |

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

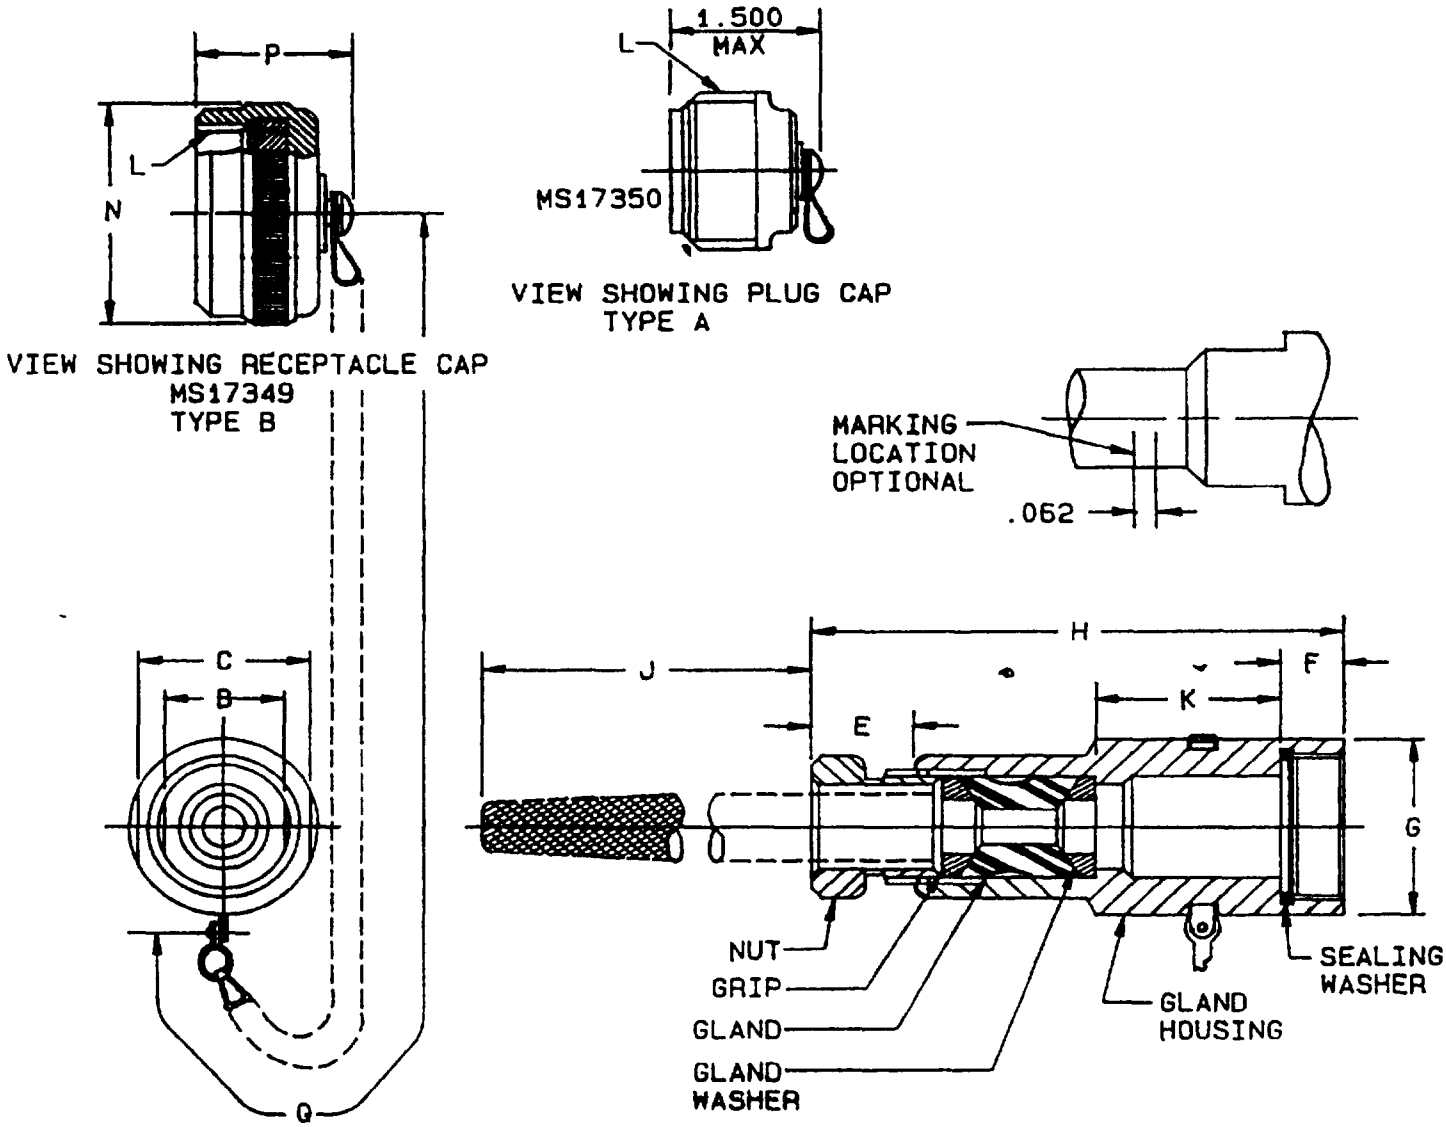


Configuration 1C Style 3 cable sealing and gripping.

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1C Style 3 cable sealing and gripping - Continued

| Size number | Shell size | Cable range | | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|---|---|
| | | Min dia | Max dia | + 000 -.010 | + 000 - 010 | thread class 2B-LH | free length max | + 016 | dia + 010 -.020 |
| 1 | 12 | 160 | .222 | .625 | .812 | 7500-20 UNEF | 476 | 479 | .938 |
| 2 | 18 | .511 | .605 | 1.000 | 1.125 | 1.1250-18 UNEF | .597 | .479 | 1 312 |
| 3 | 18 | 436 | .530 | 1 000 | 1 125 | 1.1250-18 UNEF | .597 | 479 | 1.312 |
| 4 | 18 | 306 | .375 | .875 | 1.125 | 1 1250-18 UNEF | 539 | 479 | 1.312 |
| 5 | 18 | 219 | .281 | 750 | 1 125 | 1.1250-18 UNEF | 539 | 479 | 1.312 |
| 6 | 20 | 605 | .699 | 1 062 | 1 250 | 1 2500-18 UNEF | .597 | .479 | 1 438 |
| 7 | 20 | 511 | 605 | 1.000 | 1 250 | 1 2500-18 UNEF | 597 | 479 | 1.438 |
| 8 | 20 | .361 | .455 | 1.062 | 1 250 | 1.2500-18 UNEF | 597 | .479 | 1.438 |
| 9 | 22 | 715 | .828 | 1 125 | 1 460 | 1 3750-18 UNEF | 597 | 479 | 1 562 |
| 10 | 22 | 449 | 562 | 1 125 | 1.460 | 1.3750-18 UNEF | 597 | 479 | 1.562 |
| 11 | 22 | 316 | .405 | 1 000 | 1 375 | 1.3750-18 UNEF | 597 | .479 | 1 562 |
| 12 | 24 | 692 | .805 | 1 250 | 1 625 | 1.6250-18 UNEF | 597 | 479 | 1 812 |
| 13 | 24 | 637 | 750 | 1.250 | 1 625 | 1 6250-18 UNEF | 597 | 479 | 1.812 |
| 14 | 24 | 517 | .630 | 1 250 | 1 625 | 1 6250-18 UNEF | 597 | .479 | 1.812 |
| 15 | 28 | 984 | 1 109 | 1 500 | 1 875 | 1 8750-16 UNEF | .597 | 479 | 2.062 |
| 16 | 28 | .875 | 1.000 | 1 500 | 1 875 | 1 8750-16 UNEF | 597 | 479 | 2 062 |
| 17 | 28 | 755 | 880 | 1 500 | 1 875 | 1 8750-16 UNEF | .597 | 479 | 2 062 |
| 18 | 28 | 637 | 750 | 1 250 | 1 875 | 1 8750-16 UNEF | 597 | 479 | 2 062 |
| 19 | 28 | 567 | .680 | 1.250 | 1 875 | 1 8750-16 UNEF | 597 | 479 | 2 062 |
| 20 | 28 | 436 | .530 | 1 000 | 1 812 | 1 8750-16 UNEF | 597 | 479 | 2 062 |
| 21 | 28 | 306 | .375 | 875 | 1 875 | 1 8750-16 UNEF | 539 | 479 | 2 062 |

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1C Style 3 cable sealing and gripping - Continued

| Size number | Shell size | H max | J ±.031 | K +.015 -.025 | L thread (plated) class 2 (A or B) | N dia max | P max | Q within one link |
|---|---|---|---|---|---|---|---|---|
| 1 | 12 | 2.752 | 2.406 | .563 | .8750-0.1P-0.2L-DS | 1 094 | 765 | 5 00 |
| 2 | 18 | 3.712 | 5.188 | 1 121 | 1.2500-0 1P-0.2L-DS | 1.469 | .980 | 5 00 |
| 3 | 18 | 3.712 | 4.688 | 1.121 | 1.2500-0.1P-0.2L-DS | 1.469 | 980 | 5 00 |
| 4 | 18 | 3.502 | 3.844 | 1.125 | 1.2500-0.1P-0.2L-DS | 1.469 | .980 | 5.00 |
| 5 | 18 | 3.471 | 2.844 | 1.157 | 1.2500-0.1P-0 2L-DS | 1.469 | 980 | 5.00 |
| 6 | 20 | 4.024 | 6 188 | 1.371 | 1.3750-0.1P-0.2L-DS | 1.562 | .980 | 5.00 |
| 7 | 20 | 3 841 | 5 188 | 1.250 | 1 3750-0 1P-0 2L-DS | 1 562 | .980 | 5.00 |
| 8 | 20 | 4.024 | 4.188 | 1.371 | 1 3750-0 1P-0.2L-DS | 1 562 | 980 | 5 00 |
| 9 | 22 | 4 087 | 6.688 | 1.343 | 1.5000-0.1P-0.2L-DS | 1 688 | 980 | 5.00 |
| 10 | 22 | 4 087 | 5 188 | 1 343 | 1 5000-0 1P-0 2L-DS | 1 688 | 980 | 6 00 |
| 11 | 22 | 3.841 | 3.688 | 1.250 | 1.5000-0.1P-0.2L-DS | 1.688 | 980 | 6 00 |
| 12 | 24 | 4.150 | 6.688 | 1.371 | 1.7500-0.1P-0.2L-DS | 1.938 | 980 | 6 00 |
| 13 | 24 | 4.150 | 6.688 | 1.371 | 1.7500-0.1P-0.2L-DS | 1.938 | .980 | 6 00 |
| 14 | 24 | 4 150 | 5 688 | 1.371 | 1 7500-0.1P-0.2L-DS | 1.938 | .980 | 6 00 |
| 15 | 28 | 4.212 | 7.688 | 1.371 | 2 0000-0.1P-0 2L-DS | 2.219 | 980 | 6 00 |
| 16 | 28 | 4.212 | 7 188 | 1.371 | 2 0000-0 1P-0 2L-DS | 2 219 | 980 | 6 00 |
| 17 | 28 | 4 212 | 6.688 | 1.371 | 2 0000-0 1P-0.2L-DS | 2 219 | 980 | 6 00 |
| 18 | 28 | 4.150 | 6.688 | 1.371 | 2.0000-0 1P-0 2L-DS | 2 219 | 980 | 6 00 |
| 19 | 28 | 4.150 | 6.688 | 1.371 | 2 0000-0.1P-0.2L-DS | 2 219 | .980 | 6 00 |
| 20 | 28 | 3.966 | 4.688 | 1 375 | 2.0000-0 1P-0 2L-DS | 2 219 | 980 | 6 00 |
| 21 | 28 | 3.799 | 3.844 | 1 422 | 2.0000-0.1P-0 2L-DS | 2 219 | 980 | 6 00 |

FIGURE 1 Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1C Style 3 cable sealing and gripping - Continued

| Size number | Shell size | Cable range | | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|---|---|
| | | Min dia | Max dia | + 000 -.010 | + 000 -.010 | thread class 2B-LH | free length max | +.016 | dia + 010 - 020 |
| 22 | 32 | 1.105 | 1.230 | 1.750 | 2.062 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 23 | 32 | 1.005 | 1.130 | 1 750 | 2 062 | 2.0625-16 UN | .597 | 479 | 2 312 |
| 24 | 32 | 930 | 1 055 | 1 500 | 2 062 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 25 | 32 | .857 | .970 | 1.250 | 2 062 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 26 | 32 | .755 | .880 | 1.500 | 2 062 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 27 | 32 | 637 | 750 | 1 250 | 2.062 | 2 0625-16 UN | .597 | 479 | 2 312 |
| 28 | 32 | 436 | 530 | 1 000 | 2 000 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 29 | 32 | 306 | 375 | .875 | 2.062 | 2 0625-16 UN | 597 | 479 | 2 312 |
| 30 | 36 | 1 320 | 1 445 | 2 000 | 2 312 | 2 3125-16 UN | 597 | 479 | 2 562 |
| 31 | 36 | 1 250 | 1.375 | 2.000 | 2.312 | 2 3125-16 UN | .597 | 479 | 2 562 |
| 32 | 36 | 1 185 | 1 310 | 1 750 | 2.312 | 2.3125-16 UN | .597 | 479 | 2 562 |
| 33 | 36 | 1 105 | 1.230 | 1.750 | 2.312 | 2.3125-16 UN | 597 | 479 | 2 562 |
| 34 | 36 | 1.055 | 1 180 | 1 750 | 2.312 | 2 3125-16 UN | 597 | 479 | 2 562 |
| 35 | 36 | .984 | 1.109 | 1.500 | 2.312 | 2.3125-16 UN | 597 | 479 | 2.562 |
| 36 | 36 | .857 | .970 | 1 250 | 2.250 | 2 3125-16 UN | 597 | 479 | 2.562 |
| 37 | 40 | 1 815 | 1 940 | 2 438 | 2 750 | 2 6250-16 UN | 710 | 667 | 2 875 |
| 38 | 40 | 1 700 | 1 825 | 2 438 | 2 750 | 2 6250-16 UN | 710 | 667 | 2 875 |
| 39 | 40 | 1.605 | 1 730 | 2 438 | 2 750 | 2 6250-16 UN | 710 | 667 | 2 875 |
| 40 | 40 | 1 531 | 1 656 | 2.250 | 2 750 | 2 6250-16 UN | .597 | 667 | 2 875 |
| 41 | 44 | 1 867 | 2.000 | 2 750 | 2.969 | 2 8750-16 UN | 710 | 667 | 3 125 |
| 42 | 44 | 1 775 | 1 900 | 2 438 | 2 812 | 2 8750-16 UN | 710 | 667 | 3 125 |

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Configuration 1C Style 3 cable sealing and gripping - Continued.

| Size number | Shell size | H max | J ± 031 | K + 015 - 025 | L thread (plated) class 2 (A or B) | N dia max | P max | Q within one link |
|---|---|---|---|---|---|---|---|---|
| 22 | 32 | 4.275 | 8 188 | 1.372 | 2.2500-0.1P-0.2L-DS | 2.469 | .980 | 6.00 |
| 23 | 32 | 4.275 | 7.188 | 1.372 | 2.2500-0.1P-0.2L-DS | 2.469 | .980 | 6.00 |
| 24 | 32 | 4.212 | 7.688 | 1.371 | 2.2500-0.1P-0.2L-DS | 2.469 | .980 | 6.00 |
| 25 | 32 | 4 150 | 7.188 | 1 371 | 2.2500-0.1P-0.2L-DS | 2 469 | 980 | 6.00 |
| 26 | 32 | 4.212 | 6 688 | 1 371 | 2 2500-0 1P-0 2L-DS | 2 469 | 980 | 6 00 |
| 27 | 32 | 4.150 | 6 688 | 1 371 | 2 2500-0 1P-0.2L-DS | 2.469 | 980 | 6 00 |
| 28 | 32 | 3.966 | 4.688 | 1 375 | 2.2500-0.1P-0.2L-DS | 2 469 | 980 | 6 00 |
| 29 | 32 | 3 846 | 3 844 | 1 469 | 2 2500-0 1P-0 2L-DS | 2 469 | .980 | 6.00 |
| 30 | 36 | 4 337 | 9 688 | 1 371 | 2 5000-0 1P-0 2L-DS | 2 719 | 980 | 6.00 |
| 31 | 36 | 4 337 | 9 688 | 1 371 | 2.5000-0 1P-0.2L-DS | 2 719 | 980 | 6 00 |
| 32 | 36 | 4 275 | 8.688 | 1.372 | 2.5000-0.1P-0.2L-DS | 2.719 | .980 | 6.00 |
| 33 | 36 | 4.275 | 8 188 | 1.372 | 2 5000-0.1P-0.2L-DS | 2 719 | 980 | 6.00 |
| 34 | 36 | 4 275 | 8 188 | 1.372 | 2 5000-0 1P-0.2L-DS | 2 719 | 980 | 6 00 |
| 35 | 36 | 4.212 | 7.688 | 1.371 | 2.5000-0.1P-0.2L-DS | 2.719 | .980 | 6.00 |
| 36 | 36 | 4.154 | 7 188 | 1.375 | 2 5000-0.1P-0.2L-DS | 2 719 | 980 | 6.00 |
| 37 | 40 | 5 673 | 13 188 | 2 156 | 2 7500-0 1P-0.2L-DS | 2 969 | 980 | 6.00 |
| 38 | 40 | 5 673 | 13 188 | 2 156 | 2 7500-0 1P-0.2L-DS | 2 969 | 980 | 6 00 |
| 39 | 40 | 5 673 | 13 188 | 2 156 | 2 7500-0 1P-0 2L-DS | 2 969 | 980 | 6 00 |
| 40 | 40 | 5 373 | 12 688 | 2 156 | 2.7500-0.1P-0.2L-DS | 2.969 | 980 | 6 00 |
| 41 | 44 | 5 673 | 14 188 | 2 156 | 3 0000-0 1P-0 2L-DS | 3 217 | 980 | 6 00 |
| 42 | 44 | 4 594 | 13 688 | 1 078 | 3 0000-0 1P-0.2L-DS | 3 217 | 980 | 6 00 |

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .565 | 14.35 | 1.000 | 25 40 | 1.382 | 35 10 | 1.950 | 49.53 |
| .010 | 0.25 | .567 | 14.40 | 1.0000 | 25.400 | 1.391 | 35.33 | 2.000 | 50.80 |
| 015 | 0.38 | .595 | 15.11 | 1.005 | 25.53 | 1.400 | 35.56 | 2.0000 | 50.800 |
| .016 | 0.41 | .597 | 15.16 | 1.015 | 25.78 | 1.406 | 35.71 | 2 062 | 52.37 |
| .020 | 0.51 | 600 | 15.24 | 1.030 | 26.16 | 1.420 | 36.07 | 2.0625 | 52.388 |
| .025 | 0.64 | .605 | 15.37 | 1.055 | 26.80 | 1.422 | 36.12 | 2.125 | 53.98 |
| .062 | 1.57 | .625 | 15.88 | 1.062 | 26 97 | 1.425 | 36.20 | 2.150 | 54.61 |
| .100 | 2 54 | .630 | 16.00 | 1.0625 | 26.988 | 1.430 | 36.32 | 2.156 | 54.76 |
| 130 | 3 30 | .637 | 16.18 | 1.075 | 27 31 | 1 4375 | 36 513 | 2 190 | 55.63 |
| 156 | 3 96 | .646 | 16.41 | 1.078 | 27.38 | 1.438 | 36.53 | 2.219 | 56.36 |
| 160 | 4.06 | .667 | 16.94 | 1.094 | 27 79 | 1.445 | 36.70 | 2.250 | 57.15 |
| 188 | 4.78 | 680 | 17.27 | 1.095 | 27.81 | 1.450 | 36.83 | 2.2500 | 57.150 |
| 200 | 5 08 | 690 | 17.53 | 1.105 | 28 07 | 1.469 | 37 31 | 2 312 | 58 72 |
| .219 | 5.56 | .692 | 17.58 | 1.109 | 28.17 | 1.470 | 37.34 | 2.3125 | 58.738 |
| .222 | 5 64 | .699 | 17.75 | 1.110 | 28.19 | 1.500 | 38 10 | 2.406 | 61.11 |
| 246 | 6.25 | .700 | 17.78 | 1 121 | 28.47 | 1.5000 | 38.100 | 2 438 | 61.93 |
| 250 | 6 35 | 710 | 18.03 | 1 125 | 28 58 | 1 531 | 38 89 | 2 460 | 62.48 |
| 280 | 7 11 | 715 | 18.16 | 1.1250 | 28.575 | 1.546 | 39.27 | 2.469 | 62.71 |
| 281 | 7.14 | .726 | 18.44 | 1.130 | 28.70 | 1.562 | 39.67 | 2 475 | 62 87 |
| 300 | 7 62 | 750 | 19 05 | 1 150 | 29 21 | 1.5625 | 39 688 | 2.500 | 63.50 |
| 306 | 7 77 | .7500 | 19.050 | 1 157 | 29.39 | 1 600 | 40.64 | 2.5000 | 63.500 |
| .316 | 8.03 | .755 | 19.18 | 1.180 | 29 97 | 1 605 | 40 77 | 2.562 | 65.07 |
| 321 | 8.15 | .765 | 19.43 | 1.181 | 30.00 | 1.625 | 41.28 | 2.625 | 66.68 |
| .361 | 9.17 | .780 | 19.81 | 1.185 | 30.10 | 1.6250 | 41.275 | 2.6250 | 66 675 |
| 375 | 9 53 | .787 | 19.99 | 1.1875 | 30.163 | 1.656 | 42.06 | 2.715 | 68.96 |
| 396 | 10.06 | .805 | 20.45 | 1.188 | 30.18 | 1.660 | 42.16 | 2.719 | 69.06 |
| .400 | 10.16 | .812 | 20.62 | 1 200 | 30 48 | 1.670 | 42 42 | 2.750 | 69.85 |
| 405 | 10.29 | .8125 | 20.638 | 1 219 | 30 96 | 1.688 | 42 88 | 2 7500 | 69.850 |
| 436 | 11 07 | .815 | 20 70 | 1 220 | 30 99 | 1 700 | 43 18 | 2 752 | 69.90 |
| .445 | 11 30 | 828 | 21.03 | 1.230 | 31.24 | 1.713 | 43 51 | 2.812 | 71.42 |
| 446 | 11.33 | .845 | 21 46 | 1.250 | 31.75 | 1 730 | 43 94 | 2.844 | 72.24 |
| 449 | 11 40 | .857 | 21.77 | 1.2500 | 31 750 | 1 750 | 44 45 | 2 875 | 73.03 |
| 455 | 11 56 | .875 | 22.23 | 1.270 | 32 26 | 1 7500 | 44 450 | 2 8750 | 73 025 |
| .475 | 12.07 | .8750 | 22.225 | 1.281 | 32.54 | 1.775 | 45 09 | 2.900 | 73.66 |
| 476 | 12.09 | .880 | 22 35 | 1 301 | 33 05 | 1 780 | 45 21 | 2.953 | 75.01 |
| 479 | 12 17 | .890 | 22 61 | 1.310 | 33 27 | 1.812 | 46.02 | 2.969 | 75.41 |
| 500 | 12 70 | 900 | 22.86 | 1 312 | 33 32 | 1 8125 | 46 038 | 3 0000 | 76.200 |
| 511 | 12 98 | 906 | 23 01 | 1 3125 | 33 338 | 1 815 | 46 10 | 3 125 | 79.38 |
| 517 | 13 13 | 930 | 23.62 | 1 320 | 33 53 | 1 825 | 46 36 | 3.171 | 80 54 |
| .521 | 13.23 | 9375 | 23.813 | 1.325 | 33 66 | 1.860 | 47 24 | 3 182 | 80.82 |
| .525 | 13 34 | 938 | 23.83 | 1.343 | 34 11 | 1.867 | 47 42 | 3.217 | 81 71 |
| .530 | 13 46 | .950 | 24.13 | 1.344 | 34 14 | 1.875 | 47 63 | 3.471 | 88 16 |
| .536 | 13 61 | .969 | 24.61 | 1.371 | 34.82 | 1.8750 | 46.625 | 3.502 | 88.95 |
| 539 | 13 69 | 970 | 24 64 | 1 372 | 34 85 | 1 900 | 48 26 | 3 688 | 93 68 |
| 562 | 14.27 | 980 | 24.89 | 1 375 | 34 93 | 1 938 | 49.23 | 3.712 | 94.28 |
| 563 | 14 30 | .984 | 24.99 | 1.3750 | 34.925 | 1 940 | 49 28 | 3.799 | 96 49 |

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 016 (0 41 mm)
4. Dimensions apply after plating

FIGURE 1 Configurations and dimensions - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configurations. See figure 1.

Accessories shall be designated type A and B:

Type A is for use with MS17344

Type B is for use with MS17343, MS17345, and MS17347.

The backshell, cap, and chain are considered the complete accessories to be supplied.


Material and finish: See table I Connectors and their associated accessories shall be of the same finish

TABLE I. Material and finish.


| Component | Material | Finish |
|---|---|---|
| Accessory body and cap | High grade aluminum alloy in accordance with MIL-C-85049 | A, W |
| Chain | Corrosion resistant steel, type II, class 3, trade number 8 of RR-C-271 | Passivated |
| Gasket and gland | Rubber, in accordance with MIL-R-3065 | |

Part or Identifying Number (PIN) See example below

For styles 1 and 2

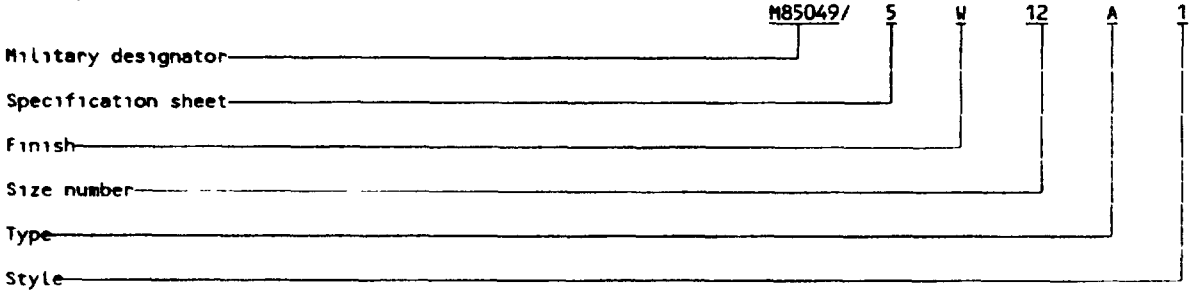


For style 3

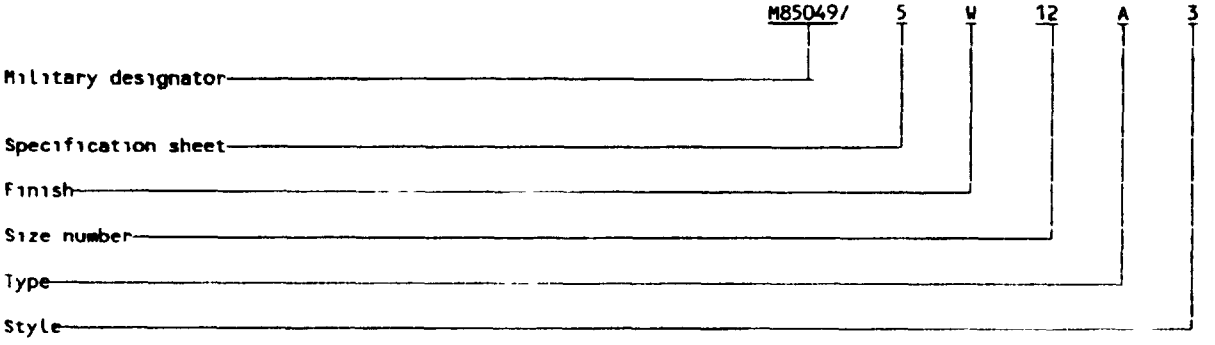




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Simplified assembly instructions shall be packaged with each accessory

Application

These accessories are for use with connectors specified on MS17343, MS17344, MS17345, and MS17347

Styles 1 and 3 are for use with classes R and C.

Style 2 for use with classes R, C, and J


Qualification:


See MIL-C-85049, category 1A.

(B) Fluid immersion: See MIL-C-22992 requirement

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444

Supersession data.

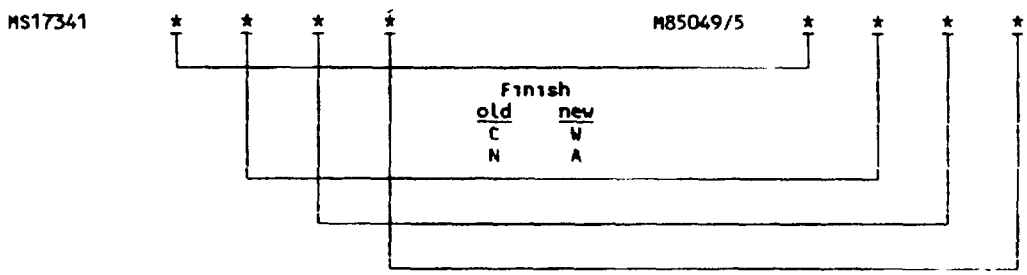

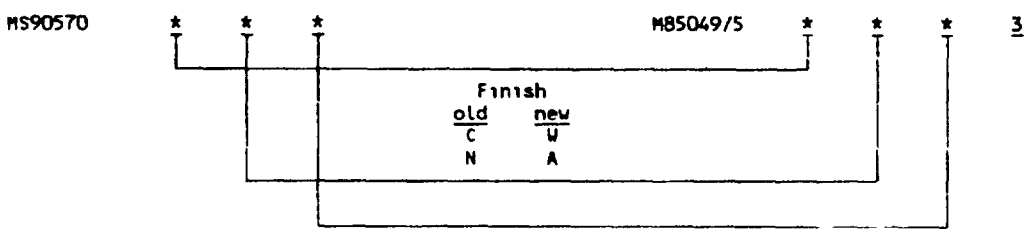
CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Air Force - 11, 99
DLA - ES

Civil agency coordinating activity
NASA - NA

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3912)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.