MILILITARY SPECIFICATION

ROCKET MANAGEMENT SUBSYSTEM
M138

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements, quality assurance provisions, and preparation for delivery for Rocket Management Subsystem, M138.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. Unless otherwise specified (see 6.2, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-6781	-	Control Panel: Aircraft Equipment Rack or Console Mounted
MIL-D-70484	-	Display Unit, Rocket Management Subsystem M138
MIL-E-5400	-	Electronic Equipment, Airborne, General Specification for
MIL-I-8500	-	Interchangeability and Replaceability of Component Parts for Aircraft and Missiles
MIL-O-70483	-	Operations Unit, Rocket Management Subsystem, M138
MIL-P-7788	-	Panels, Information; Integrally Illuminated Plate, Tags and Bands for Identification of Equipment

FSC 1310

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

MIL-P-15024	-	Plate, Tags and Bands for Identification of Equipment
MIL-W-63150	-	Weapons and Support Material, Standard Quality Assurance Provisions for
MS25212		Control Panel, Console Type, Aircraft Equipment, Basic Dimensions

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130	-	Identification Marking of US Military Property
MIL-STD-704	-	Aircraft Electric Power Characteristics
MIL-STD-810		Environmental Methods (with Notice 2 (11))
MIL-STD-1235	-	Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

2.1.2 Other Government documents, drawings, and Publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein:

DRAWINGS

us ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

PRODUCT

9324106	-	Rocket Management Subsystem, M138
12011837	-	Signal Interface Control Document

PACKAGING

P9324107	-	Display Unit
P9324108	-	Operations Unit

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D-3951 - Standard Practice for Commercial Practice

(Copies of specifications, standards, handbooks, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Subsystem definition. The Rocket Management Subsystem (RMS) shall provide the capability while in flight to select, set electrical resistance-capacitance (RC) fuzes, and fire single Or multiple 2.75 inch aerial rockets from four stations consisting of minimum of five rocket types. Rocket quantities and firing rates selected shall be variable. The subsystem shall provide a visual presentation of the number of remaining rockets by type.

3.1.1 Item diagram. Figure 1 shows the general functional relationship between the components of the RMS and between the RMS and the helicopter.

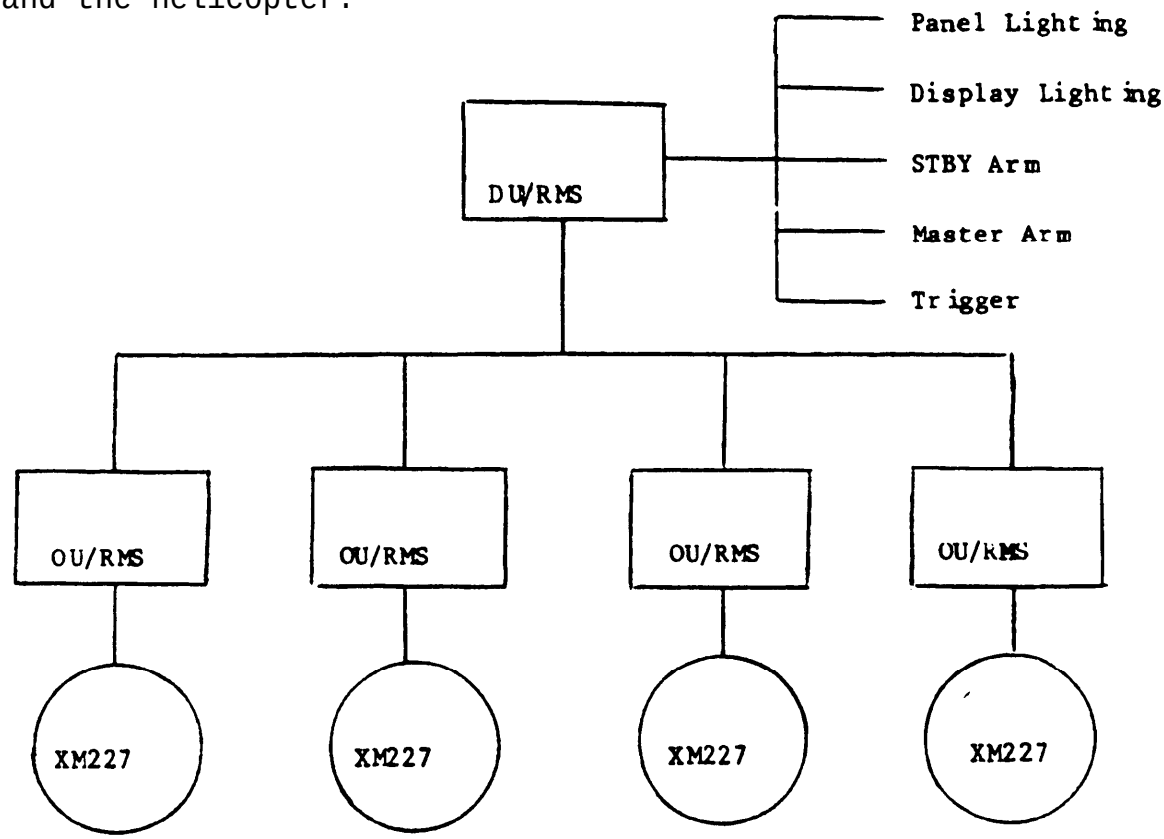


Figure 1. Functional Block Diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.1.2 Interface definition. The RMS when installed on the AH-1S series helicopters shall interface with the following:

- Aircraft power
- Universal turret
- 7.62mm gun pod M18)
- Launcher M158A1 - 7 tube
  - M158A1 - 7 tube
  - M158A1 (RC) - 7 tube
  - M200A1 - 19 tube
  - XM227 - 19 tube with fuze interface
  - XM (Lightweight) - 7 tube
  - XM (Lightweight) - 19 tube
- Night vision goggles (AN/PVS-5)
- 2.75 inch rocket (MK-40Mod 3 motors)
  Warhead/fuze (2.75 inch rocket system)
- Fire control system (FCS)

3.1.2.1 Electrical interface. All electrical interface with the RMS shall be through one electrical connector on the back of the Display Unit/Rocket Management Subsystem (DU/RMS); the signal interface requirements shall be defined as those set forth in the RMS Signal Interface Control Document, 12011837.

3.1.2.1.1 Master arming signal. The RMS shall interface with the helicopter master arm circuitry through the DU/RMS. Electrical power for firing shall be provided when the helicopter MASTER ARM switch is closed.

3.1.2.1.2 DU/RMS Panel illumination power. The RMS shall interface with the helicopter lighting circuitry for electrical power to illuminate the DU/RMS panel lights.

3.1.2.1.3 Wing stores firing switches. The RMS shall interface with the wing stores firing switches on the cyclic controls through the DU/RMS. Closure of the wing stores firing switches shall be the final step in the rocket firing sequence.

3.1.2.1.4 Rocket launcher assemblies. The RMS shall interface with the wing-mounted rocket launchers as defined in 3.1.2 through the Operations Unit/Rocket Management Subsystem (OU/RMS). Signals to set the warhead fuzes and to ignite the rocket motors shall be supplied to the rocket launchers from the OU/RMS upon commands from the DU/RMS. The DU/RMS shall have the capability of identifying the launcher type attached to the helicopter stations by electrical circuits provided in the launchers for maintaining 7-tube and 19-tube firing sequence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.1.2.1.5 Fire control. The RMS shall provide rocket fuze/ warhead type selection and fuze setting functions. The RMS shall have the capability to set aerial burst and penetration fuzes either with or without a fire control computer on board the helicopter. Computer range-will be used only if automatic range mode is selected. If no fire control computer is aboard, the time of flight will be determined by stored conversion data from a range input. This conversion data shall be based on the 60 knot curve shown in Figure 2. If a fire control computer is aboard, automatic range mode may be selected and the computer will furnish a time-of-function input with which to set fuze times.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

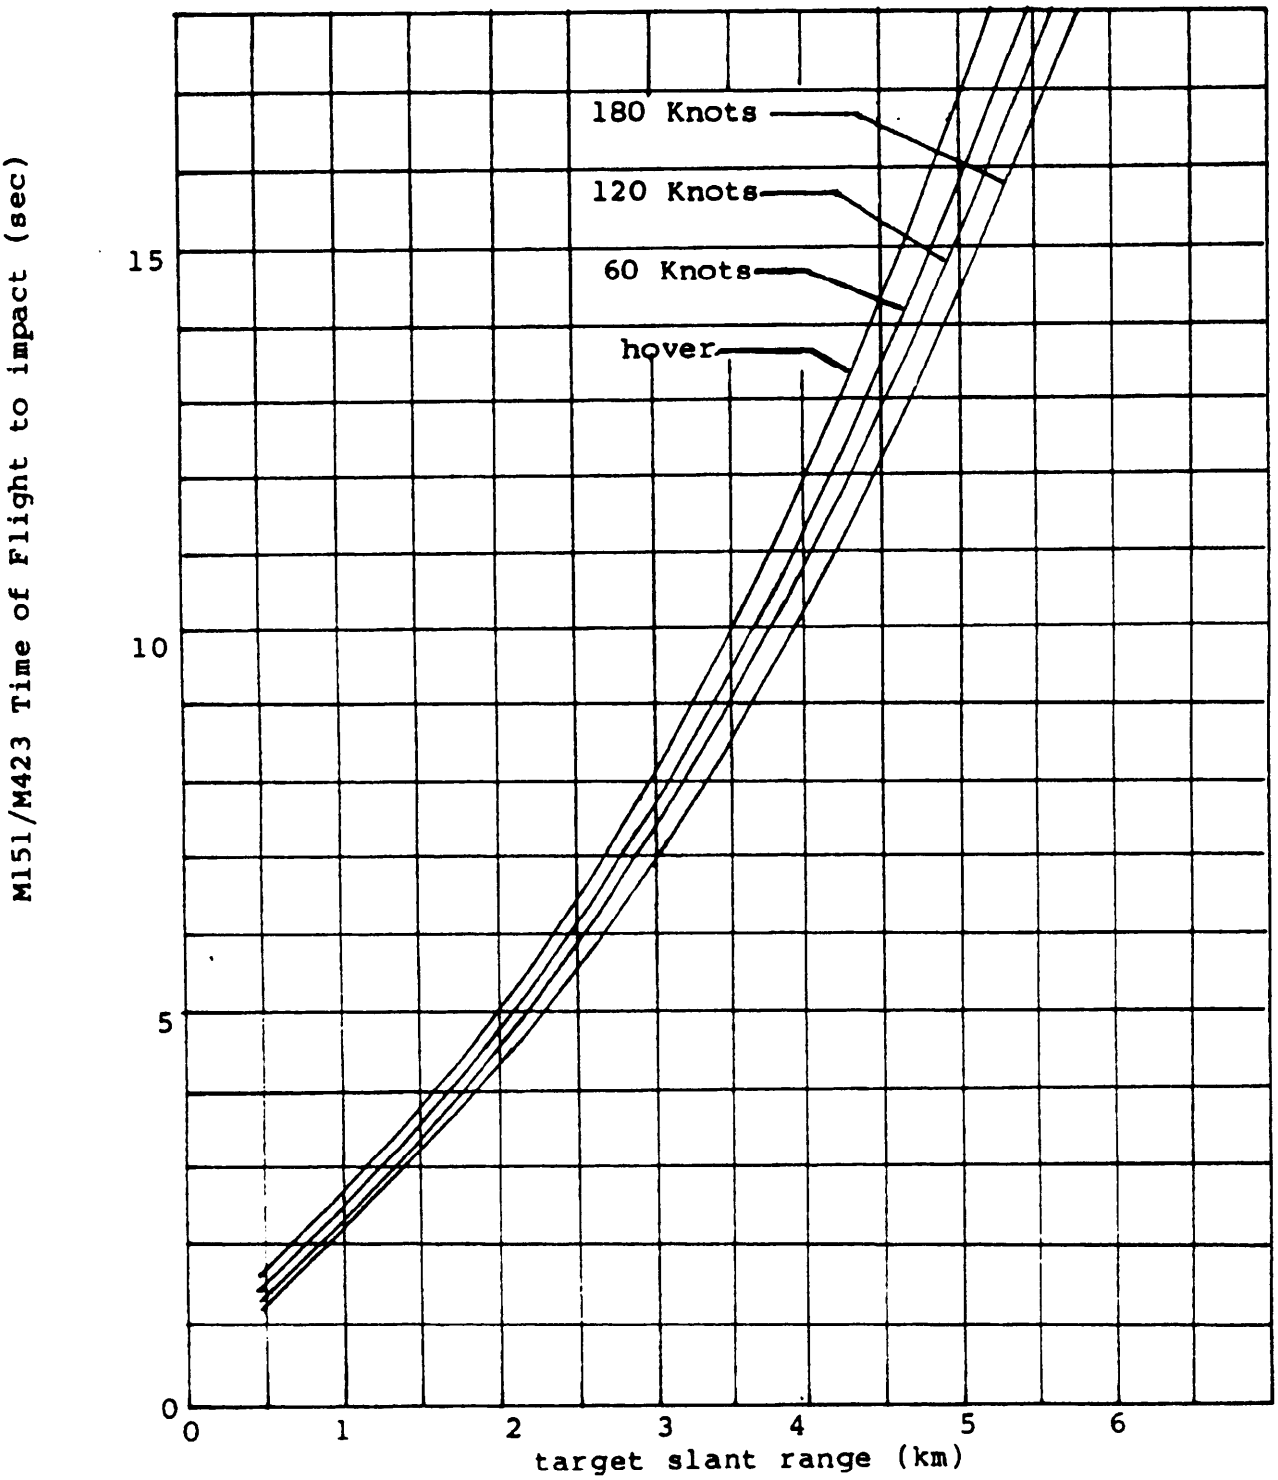


Figure 2. Time of flight as a function of range and forward airspeed for M151/M423 warhead/fuze combination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.1.2.1.5.1 Data output. If an external fire control computer is present, the RMS shall transmit to the computer the identification of the rocket type the pilot has chosen for firing, the manually selected penetration range setting, or the manually selected airburst range setting.

3.1.2.1.5.2 Data inputs - fire control computer present. If an external fire control computer is present, the RMS shall accept time-of-function data from the fire control computer and shall set aerial burst and penetration fuzes when the automatic mode is selected.

3.1.2.1.5.3 Data inputs - fire control computer not present. If an external fire control computer is not present, the RMS shall accept range information from a manual input and convert it to time of flight and then set aerial burst and penetration fuzes.

3.1.2.1.6 Electrical power. The RMS shall operate in accordance with MIL-STD-704A, Catagory B, ±Abnormal Steady State Level (ASSL) 1. Normal operating voltage shall be 28 Vdc and average current shall not exceed 3 amperes. Reversal of the polarity of the primary power supplied to the DU/RMS shall not cause damage to the OU/RMS components or cause it to produce false firing or charging signals. There shall be no false outputs from transients or from application or removal of power.

3.1.2.1.6.1 Standby power. Standby power shall be controlled by the helicopter master arm switch.

3.1.2.1.6.2 Arming power. Arming power shall be controlled by the helicopter master arm switch.

3.1.2.2 Mechanical interface.

3.1.2.2.1 DU/RMS Interface. The DU/RMS shall be panel mounted in the pilot's compartment in an area accessible to the pilot. The panel shall be designed in accordance with MS25212. A height of 4.5 inches maximum and a length of 7.0 inches maximum is allowed. The connector plug shall be located in the lower left hand corner when viewed from the rear to be compatible with the airframe interface.

3.1.2.2.2 OU/RMS Interface. Each of the OU/RMS shall be rigidly mounted in the wing leading edge adjacent to the launchers. An area 3.2 inches high by 4.2 inches wide by 7.6 inches long may be utilized for each unit.

3.1.3 Major components list. The major components of the RMS shall be identified as follows: (See Figure 3.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

Components	Specification/Drawing No.
Display Unit/Rocket Management Subsystem	MIL-D-70484
Operations Unit/Rocket Management Subsystem	MIL-O-70483

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

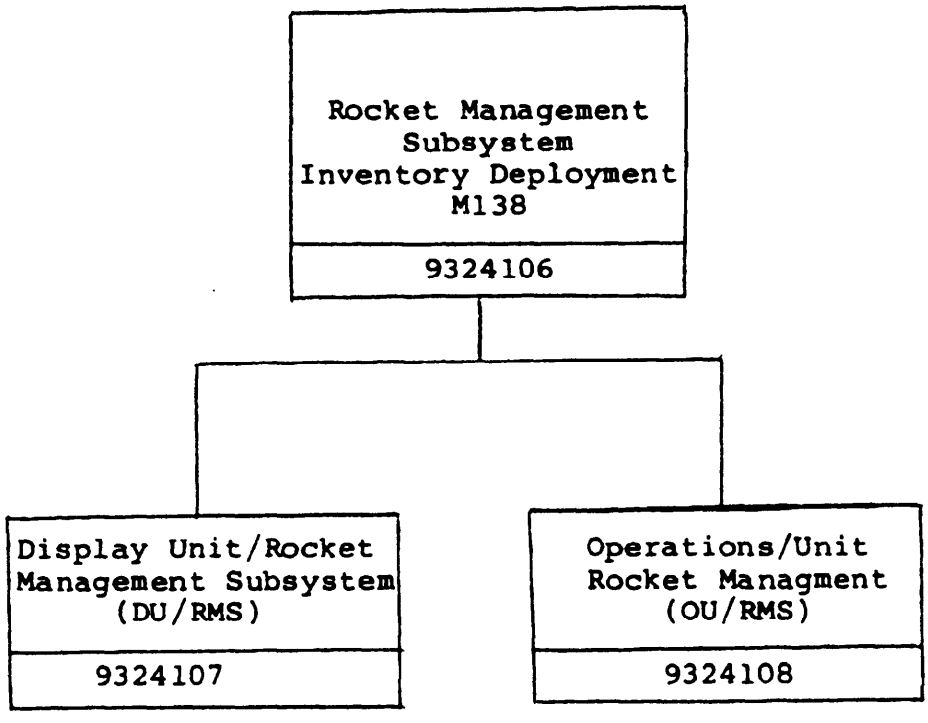


Figure 3. Rocket management subsystem

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.2 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract and 4.4.

3.3 Materials. Materials shall be in accordance with applicable drawings, specifications and standards.

3.4 Parts. The parts shall comply with all requirements specified on drawings listed in paragraph 2.1 and associated drawings, and with all requirements specified in applicable specifications and standards.

3.5 Design and construction. The M138 Rocket Management Subsystem shall comply with all requirements specified on Drawing (Dwg) 9324106, all associated drawings, and with all requirements specified in applicable specifications and standards. The RMS shall be constructed to meet the requirements of MIL-E-5400, for class 1A equipment. Because of compact design of the DU power supply, a maximum of five wires may be terminated at a terminal.

3.5.1 Interchangeability. All components having the same part number shall be dimensionally and functionally interchangeable and in accordance with MIL-I-8500. Interchangeability must be maintained within the detail parts to the level of replaceable items (provisioning level).

3.5.2 Performance characteristics.

3.5.2.1 Major component characteristics. The following paragraphs specify the required performance characteristics and functions of the major components of the RMS.

3.5.2.1.1 Display Unit/Rocket Management Subsystem (DU/RMS). The DU/RMS shall be located in the pilot's compartment and shall contain all controls and displays needed to select and control aerial rockets.

3.5.2.1.1.1 Controls and displays. All external controls and displays shall be mounted on the panel face.

3.5.2.1.1.2 Rocket-type selection. The DU/RMS shall have provisions to select from, four rocket launchers warhead/fuze type(s) consisting of one, two, three, four or five warhead/fuze type(s) selected from the list in Table I. Each launcher may be loaded with rockets consisting of one to three different warhead/fuze types. In all loading configurations, the loading shall be symmetrical and firing of rockets shall occur as defined in 3.5.2.1.1.8 to maintain the weight and balance of the helicopter and rocket pods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

Table I. 2.75 inch rocket configuration

Thumbwheel Indication	WARHEAD/FUZE
CHF	Chaff warhead (countermeasures)
MPS	Multipurpose submunition warhead with remote set fuze
SMK	Smokescreen warhead with remote set fuze
ILM	Illumination warhead with remote set fuze
FLC	Flechette submunition warhead with remote set fuze
H17	17-point high explosive warhead with point-detonating/proximity fuze
WP	White phosphorous warhead with point-detonating fuze
HDP	High explosive, dual purpose warhead
HRC	High explosive warhead with remote set fuze
HPX	High explosive warhead with proximity fuze
HPD	High explosive warhead with point-detonating fuze
Blank	Undesignated position that can be used for any warhead/fuze combination not listed above, on a mission-to-mission basis.

3.5.2.1.1.3 Automatic arming/de-arming. When a rocket type is selected, the DU/RMS shall be capable of automatic arming of all zones containing the same type of rocket. When the rocket complement consists of different type rockets, the DU/RMS shall have the capability of automatically canceling the previous selection if the new selection is a different type of rocket.

3.5.2.1.1.4 Rocket quantity selection. A control shall be provided for selection of rockets to be fired. This control shall provide the exact number of firing pulses for quantity selection of 1,2,4,8 or ALL for any mode of and rate of firing. ALL signifies that all of the warhead/fuze type selected shall be fired as long as the wing stores fire switch is held in the ON position. If the firing switch is released prior to the completion of a selected launch sequence, the quantity-selector logic shall reset such that the launch sequence is not resumed, but begins anew when the firing switch is again depressed.

3.5.1.1.5 Fuze set selection. The DU/RMS shall have provisions to remotely set resistance-capacitance (RC) fuzes concurrently at four stations. Setting of RC fuzes shall occur only on the rockets selected for firing when the stores trigger

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

switch is held in the ON position. The fuze charging cycle shall not exceed 60 milliseconds. The time between initiation of the trigger switch and the first squib firing pulse shall not exceed 120 milliseconds.

3.5.2.1.1.6 Penetration selection. The function of remotely setting the XM433 or equivalent fuze shall permit selection of impact detonation, canopy penetration delays, or bunker penetration delays. The subsystem shall provide for both manual and automatic remote fuze setting.

a. Manual - The controls shall permit manual setting for tree heights ranging from 10 to 45 meters in 5 meter increments. The manual bunker delay setting shall defeat bunkers (logs and dirt) up to 3 meters thick.

b. Automatic - Automatic tree height mode position shall be provided to permit automatic fuze setting for two ballistically different warheads.

3.5.2.1.1.7 Range selection. Provisions shall be made to select the range for detonation of rockets equipped with XM439 or equivalent airburst fuzes.

a. Manual - Distance-to-target selector switches shall permit setting fuzes from 500 meters to 6000 meters. The manual setting shall be labeled in 100 meter increments.

b. Automatic - The range selection shall provide for an input from the FCS for automatic fuze setting. A minimum of 575 increments of fuze setting are required in the automatic mode.

3.5.2.1.1.8 Rocket firing modes. The DU/RMS shall have provisions to select the following modes of fire.

3.5.2.1.1.8.1 Manual.

a. Single fire - A single rocket of the type selected shall be fired for each closure of the wing stores, trigger switch. On repeated closures of the trigger, rockets of the type selected shall alternate from side to side of the helicopter to maintain a safe weight and balance. Outboard launchers shall be fired first.

b. Pair fire - Two rockets of the type selected, one from each side, shall be fired for each closure of the wing stores trigger switch. If outboard and inboard launchers contain the same type of warhead/fuzes, outboard launchers shall be fired first. The time cliff< ence between the pair of firing pulses shall not exceed 1 millisecond.

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:35Z
Check the source to verify that this is the currentversion before use.

c. Quad fire - Four rockets of the warhead/fuze type selected, one from each launcher, shall be fired for each closure of the wing stores trigger switch. Inboard launchers shall be fired first. There shall be a 30 ±5 millisecond delay between the inboard and outboard pairs with the inboard leading. The time difference between each pair of firing pulses shall not exceed 1 millisecond.

3.5.2.1.1.8.2 Sustained or continuous fire. When 1,2,4,8 or ALL firing pulses have been selected, the DU/RMS shall continue to generate firing pulses up to the programmed number or until the trigger is released. If the volley is interrupted by release of the trigger switch, reclosure of the trigger switch shall begin a new firing cycle as programmed.

3.5.2.1.1.9 Rates of fire. The DU/RMS shall have the provisions to select a minimum of two rates of fire as follows:

3.5.2.1.1.9.1 Fast rate. The time interval (period) between single and groups of firing pulses shall be 60 +6 milliseconds for conventional and M433 fuzed rounds, and 70 ±7 milliseconds for M439 fuzed rounds.

3.5.2.1.1.9.2 Slow rate. The time interval (period) between single or groups of firing pulses shall be 180 ±18 milliseconds.

3.5.2.1.1.10 Inventory display. An inventory display shall be provided and shall consist of two sections: a warhead/fuze *type* indicator section and a quantity remaining indicator section.

3.5.2.1.1.10.1 Warhead/fuze type indicator section. The warhead/fuze type indicator-switch section shall ~~be~~ settable at the time the launchers are loaded to indicate the type of warhead/ fuze combinations loaded.

3.5.2.1.1.10.2 Quantity remaining indicator section. The quantity remaining indicator section shall provide a numerical display of the number of functional rockets remaining. The display shall indicate the correct quantity of functional rockets remaining regardless of the sequence *in* which the rockets were loaded or launched and shall be automatically updated in less the 50 milliseconds after each firing cycle. Momentary power interruptions (as defined in MIL-STD-704A) shall not cause erroneous displays. An accurate count of warhead/fuze type remaining shall be automatically displayed when power is applied after power shutdown or power loss. The display digits shall be visible and readable with direct sunlight shining through the cockpit canopy on the display panel.

Source: https://assist.dla.mil -- Downloaded: 202640-23T03:35Z
Check the source to verify that this is the currentversion before use.

3.5.2.1.1.11 Displays. The presentation of each type of warhead/ fuze remaining shall be in numerical format. Display selection shall be legible under high and low ambient brightness including direct sunlight and shall be compatible with night vision goggles AN/PVS-5.

3.5.2.1.1.11.1 Display time. The remaining count for each warhead/fuze type shall be updated within 50 milliseconds after each firing cycle.

3.5.2.1.1.11.2 Display intensity. The intensity of illumination shall be controlled by the helicopter dimming control.

3.5.2.1.1.11.3 Zero suppression. The ten digit readout of each warhead/fuze type display shall automatically turn off when the remaining count is less than 10.

3.5.2.1.1.11.4 Lamp and display test. The DU/RMS shall include a press-to-start switch to test the lamps and digital displays at any time electrical power is applied to the RPM. All functional lamps and segments of the digital displays should illuminate in the test mode. The lamps and digital displays shall illuminate with the same intensity as was illuminated prior to pressing the press-to-start switch (as controlled by DIMMER BUS).

3.5.2.1.1.12 Edge lighting. The DU/RMS face panel shall conform to the requirements of MIL-C-6781 and shall have a 28 Vdc red lighting system in accordance with MIL-P-7788. Dimming shall be controlled through the helicopter light dimming control and shall be compatible with AN/PVS-5 Night Vision Goggles.

3.5.2.1.2 0perations unit/rocket management subsystem (OU/RMS). The OU/RMS shall be mounted as specified in 3.1.2.2.2. Each OU/RMS shall interface with the DU/RMS and one M158A1, M200A1, XM227, or XM (Lightweight) rocket launcher assembly.

3.5.2.1.2.1 OU/RMS Electrical power. All electrical power for each OU/RMS shall be provided by the DU/RMS.

3.5.2.1.2.2 Rocket launching signals. The OU/RMS shall provide two signals, a charging signal and launch signal to each tube in the rocket launcher. These signals shall be transmitted on two separate shielded wires for each rocket tube.

3.5.2.1.2.2.1 Charging signal. A charging signal shall be provided for each rocket tube in the launcher through the fuze charging connector to set the warhead/fuze. This signal shall have maximum amplitude limits of +20 to -22 Vdc with a maximum duration of 50 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.5.2.1.2.2.2 Launch delay. The time required for setting time delay and penetration warhead/fuzes shall not delay the launching-of a rocket more than 120 milliseconds after the wing stores firing switch has been depressed.

3.5.2.1.2.2.3 Fuze grounding. Each fuze charge line shall be electrically grounded except when it is selected for charging or during interrogation cycle. The resistance of the fuze charge line grounded as measured at the OU/RMS connector shall not exceed 0.275 ohm (at 25°C and below) and above 25°C the limit shall be a straight line function to 0.310 ohm at 51.6°C. Sustained grounding of a fuze charge line shall not impair the operation of other fuze charge lines.

3.5.2.1.2.2.4 Launching signal (squib pulse). A squib pulse signal shall be provided for each rocket tube through the launch connector to ignite the rocket motor. This pulse shall be at lease 5 amperes for at least 10 milliseconds when applied to a load of 1 ± 0.1 ohm.

3.5.2.1.2.2.5 Squib grounding. Each squib firing line shall be electrically grounded except when it is selected for firing or interrogation. squib firing lines may be interrogated for not more than 15 milliseconds with a terminal impedance of not more than 15 ohms. The resistance of any grounded squib circuit, excluding electrical interface cables, shall not exceed 0.1 ohm measured at the unit connector. Sustained grounding of squib firing lines shall not impair the operation of other squib firing lines.

3.5.2.2 Functional performance. The functional performance characteristics of the RMS shall be as defined in the following paragraphs.

3.5.2.2.1 Operational control. The RMS shall provide the capability to select rocket armament consisting of 7-tube launchers, 19-tube launchers, or a symmetrical-mixture. Firing shall consist only of firing stores as programmed by the pilot.

3.5.2.2.1.1 Rockets. The RMS shall provide an in-flight capability to select and set resistance-capacitance (RC) fuzes and fire rockets as specified in 3.5.2.1.1.2 through 3.5.2.2.8.2.

3.5.2.2.1.2 Accuracy. Accuracy shall be the allowable variations in observed electronic functioning times of nominal, ambient temperature fuze curcuits of the types specified below when tested with the RMS, exluding fire control errors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

a. XM433 Fuze - The allowable variation for the XM433 fuze shall be +6 percent or ±18 milliseconds, whichever is greater, of canopy penetration mode fuze function times specified in Table II. The allowable variation in the bunker penetration mode fuze function times specified in Table I shall be +6 milliseconds.

b. XM439 Fuze - The allowable variation for the XM439 fuze shall be +1.25 percent or +125 milliseconds, whichever is greater, of the fuze function times specified in Table III.

TABLE II. M433 fuze manual set times

Control Panel Setting (Meters)	Set Time (Milliseconds)
SQ	0
BNK	20
10	30
15	110
20	200
25	325
30	450
35	525
40	575
45	600

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

TABLE III. M439 fuze manual set times

Control Panel Setting (Kilometers)	Set Time (Milliseconds)	Control Panel Setting (Kilometers)	Set Times (Milliseconds)
0.0	950	4.5	13125
0.1	950	4.6	13550
0.2	950	4.7	13975
0.3	950	4.8	14400
0.4	950	4.9	14825
0.5	950	5.0	15275
0.6	1175	5.1	15725
0.7	1375	5.2	16225
0.8	1600	5.3	16700
0.9	1775	5.4	17200
100	1975	5.5	17700
1.1	2175	5.6	18200
1.2	2375	5.7	18700
1.3	2600	5.8	19225
1.4	2825	5.9	19725
1.5	3050	6.0	20275
1.6	3300	A	7375
1.7	3550		
1.8	3800		
1.9	4075		
2.0	4325		
2.1	4750		
2.2	4900		
2.3	5200		
2.4	5500		
2.5	5775		
2.6	6100		
2.7	6425		
2.8	6725		
2.9	7075		
3.0	7375		
3.1	7725		
3.2	8075		
3.3	8425		
3.4	8800		
3.5	9150		
3.6	9525		
3.7	9900		
3.8	10275		
3.9	10650		
4.0	11050		
4.1	11425		
4.2	11850		
4.3	12275		
4.4	12700		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.5.2.2.1.3 Distribution of weight. The distribution of weight between right and left launchers shall not be out of balance by more than five rockets except for asymmetrical loading resulting from damage outboard of the operations units. The firing order of each type of rocket within a launcher shall be controlled to minimize lateral center of gravity shifts within the launcher.

3.5.2.2.1.4 Malfunction indication. An equipment status indicator shall be provided on each LRU. The equipment status indicator shall be a go/no go device and shall be such as to hold the last result if power is interrupted or removed, and shall be on the surface of the OU/RMS, visible to the mechanic when the equipment is installed in the aircraft. The equipment status indicator on the DU/RMS shall be located on the back of the DU/RMS and is visible only when the DU/RMS is removed from the aircraft. The BIT provisions shall also provide for driving a remote indicator. This output shall be such that a signal of 28 ±4 Vdc indicates a go condition and a signal of ±0.5 Vdc indicates a no-go condition.

3.6 Environmental conditions. The system shall operate and meet the performance requirements of 3.5.2 under any of the environmental conditions, or reasonable combination of these conditions, as specified below:

3.6.1 Natural environments. The components of the RMS subsystem shall be capable of operation and storage in the worldwide environments as specified below:

3.6.1.1 Temperature-Altitude. Operating: 0-20,000 feet; nonoperating and storage: 0-50,000 feet.

3.6.1.2 Temperature.

a. Operating.
   (1) Display Unit: -65° to +125°F
   (2) Operations Unit: -65° to +160°F

b. Nonoperating and storage.
   (1) Display Unit: -65° to +160°F
   (2) operations Unit: -65° to +160°F

3.6.1.3 Humidity. Operation after exposure to 149°F and relative humidity to 95 percent.

3.6.1.4 Sand and dust. Operation after internal and external exposure to sand and dust test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

3.6.1.5 Fungus. Operating, nonoperating and storage after being subjected to fungus specified below:

Fungus	Serial Number
Aspergillus niger	9642
Aspergillus flavus	9643
Aspergillus versicolor	11730
Penicillium funiculosum	11797
Chaetomium globosum	6205

3.6.1.6 Explosive atmosphere. Operation in explosive vapor within or surrounding the equipment.

3.6.1.7 Rain. The RMS Operations Unit shall operate without degradation of specified performance and shall sustain no physical damage during periods of heavy precipitation.

3.6.1.8 Service environment. The system shall be designed and constructed to withstand the service environment as specified in MIL-E-5400 for Class 1A equipment.

3.6.1.8.1 Vibration. The equipment shall not sustain damage or subsequently fail to provide specified performance when subjected to the vibration environment defined by MIL-E-5400, Figure 2, (Sheet 1), Curve III.

3.6.1.8.2 Shock. The equipment shall meet the shock requirements of MIL-E-5400. The requirements of MIL-E-5400 for mounting hardware crash safety shall only apply to the units mounted inside the cockpit.

3.6.1.8.2.1 Bench handling. The equipment shall withstand shock environments encountered in maintenance and servicing.

3.7 Weight. The weight of the RMS including DU/RMS and four OU/RMS boxes shall be 16.88 pounds maximum.

3.8 Identification and marking. Each component of the RMS shall be identified and marked in accordance with MIL-STD-130.

3.8.1 Identification plates. An identification (ID) plate per MIL-P-15024 shall be securely attached to each DU/RMS and OU/RMS. The ID plate shall be designed and attached to last the anticipated lifetime of the unit under the environmental conditions to which it will be subjected. Information on each ID plate shall as a minimum include the following:

Contract number
FSN or NSN
Nomenclature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

Manufacturer's name and FSCM number
Part number
Serial number
Date of manufacture

3.9 Workmanship. The workmanship shall be in accordance with high-grade helicopter construction practices and shall meet the quality assurance provisions of this specification. Workmanship shall be in accordance with MIL-E-5400.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-W-63150 shall apply and are hereby made a part of this detail specification. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and *services* conform to prescribed requirements.

4.2 Certification of provisions. The certification provisions of MIL-W-63150 shall apply.

4.3 Classification of inspection. The following types of inspection shall be conducted on this item.

a. First Article Inspection.
b. Quality Conformance Inspection.

4.4 First article inspection.

4.4.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.4.2. The first article sample shall consist of one Rocket Management Subsystem.

4.4.2 Inspections to be performed. First article assemblies components, and test specimens may be subjected by the Government, at a place designated by the Government, to any or all of the examinations and tests specified in the item detail specification and to any or all of the-requirements of the applicable drawings. See Table IV specified herein.

4.4.3 Rejection. If any assembly, component, or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly, component, or test specimen in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

TABLE IV. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-R-70503A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
	Rocket Management Subsystem		See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Rocket Management Subystem (Dwg 9324106)				
	Examination for defects	1		3.5	4.5.2.1
	Interchangeability	1		3.5.1	4.6.3
	Altitude	1		3.6.1.1	4.6.4.1
	Temperature	1		3.6.1.2	4.6.4.1
	Humidity	1		3.6.1.3	4.6.4.2
	Sand and dust	1		3.6.1.4	4.6.4.3
	Fungus	1		3.6.1.5	4.6.4.4
	Explosive atmosphere	1		3.6.1.6	4.6.4.5
	Rain	1		3.6.1.7	4.6.4.6
	Service environment	1		3.6.1.8	4.6.4.7
	Vibration	1		3.6.1. 8.1	4.6.4.7.1
	Shock	1		3.6.1 8.2	4.6.4.7.2
	Bench handling	1		3.6.1. 8.2.1	4.6.4.7.2.1

NOTES:
* One sample to be examined/tested in the order listed.

DD FORM 1664 (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:35Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection. Acceptance inspection shall be performed and shall be in accordance with the following:

4.5.1 Lot formation. The term “inspection lot” is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which drawn and presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions and complies with the provisions for submission of product as specified in MIL-STD-105. All material submitted for inspection in accordance with this specification shall comply with the homogeneity critieria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with the requirements.

4.5.2 Examination. Examination for the inspection listed *in* the following Classification of Defects and Tests paragraphs shall be performed by sampling to the AQL specified unless 100 percent inspection is indicated. Unless otherwise specified sampling shall be in accordance with MIL-STD-105 Level II, except the contractor may request permission from the procuring activity to use an equivalent continuous sampling plan from MIL-STD-1235.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 5		DRAWING NUMBER 9324106
4.5.2.1	Rocket Management Subsystem				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major:					
101.	Item diagram		100%	3.1.1	4.6.1.1
102.	Interface definition		100%	3.1.2	4.6.1.1
103.	Electrical interface		100%	3.1.2.1	4.6.1.1
104.	Master arming signal		100%	3.1.2.1.1	4.6.1.1
105.	DU/RMS panel illumination power		100%	3.1.2.1.2	4.6.1.1
106.	Wing sores firing switches		100%	3.1.2.1.3	4.6.1.1
107.	Rocket launcher assemblies		100%	3.1.2 1.4	4.6.1.1
108.	Fire control		100%	3.1.2.1.5	4.6.1.1
109.	Data input - fire control computer present		100%	3.1.2.1.5.1	4.6.1.1
110.	Data input - fire control computer non present		100%	3.1.2.1.5.2	4.6.1.1
111.	Electrical power		100%	3.1.2.1.6	4.6.1.1
112.	Stand by power		100%	3.1.2.1.6.1	4.6.1.1
113.	Arming power		100%	3.1.2.1.6.2	4.6.1.1

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 5		DRAWING NUMBER 9324106
4.5.2.1	Rocket Management Subsystem				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
114.	DU/RMS interface		100%	3.1.2.2.1	4.6.1.1
115.	OU/RMS interface		100%	3.1.2.2.2	4.6.1.1
116.	Materials		0.65	3.3	4.6.1
117.	Parts		0.65	3.4	4.6.1
118.	Design and constructions		0.65	3.5	4.6.1.1
119.	Interchangeability		0.65	3.5.1	4.6.3
120.	Display unit/rock management	a	----	3.5.2.1.1	4.6.1.1
121.	Subsystem/RMS	a	----	3.5.2.1.1.1	4.6.2
122.	Controls and displays	a	----	3.5.2.1.1.2	4.6.2
123.	Rocket type selection	a	----	3.5.2.1.1.2	4.6.2
124.	Automatic arming/de-arming	a	----	3.5.2.1.1.2.1	4.6.2
125.	Rocket quantity selection	a	----	3.5.2.1.1.3	4.6.2
126.	Fuze set selection	a	----	3.5.2.1.1.4	4.6.1.1, 4.6.2
127.	Penetration selection	a	----	3.5.2.1.1.5	4.6.2
128.	Range selection	a	----	3.5.2.1.1.6	4.6.2

NOTES:

a. Three samples: reject on one failure.

DESC-SA (5) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 3 OF 5	DRAWING NUMBER
4.5.2.1	Rocket Management Subsystem		9324106
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
129.	Manual	a	----	3.5.2.1.1.7.1	4.6.2
130.	Sustained or continuous fire	a	----	3.5.2.1.1.7.2	4.6.2
131.	Rates of fire	a	----	3.5.2.1.1.8	4.6.2
132.	Fast rate	a	----	3.5.2.1.1.8.1	4.6.2
133.	Slow rate	a	----	3.5.2.1.1.8.2	4.6.2
134.	Inventory display	a	----	3.5.2.1.1.9	4.6.2
135.	Warhead/fuze-type indicator section	a	----	3.5.2.1.1.9.1	4.6.2
136.	Quantity remaining indicator section	a	----	3.5.2.1.1.9.2	4.6.2
137.	Displays	a	----	3.5.2.1.1.10	4.6.2
138.	Display time	a	----	3.5.2.1.1.10.1	4.6.2
139.	Display intensity	a	----	3.5.2.1.1.10.2	4.6.2
140.	Zero suppression	a	----	3.5.2.1.1.10.3	4.6.2
141.	Lamp and display test	a	----	3.5.2.1.1.10.4	4.6.2

NOTES:

a. Three samples: reject on one failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 4 OF 5		DRAWING NUMBER 9324106
4.5.2.1	Rocket Management Subsystem				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
142.	Edge lightening	a	----	3.5.2.1.1.11	4.6.2
143.	Operations unit/rocket management	a	----	3.5.2.1.2	4.6.1.1
144.	OU/RMS electrical power	a	----	3.5.2.1.2.1	4.6.1.1
145.	Rocket launching signals	a	----	3.5.2.1.2.2	4.6.1.1
146.	Charging signal	a	----	3.5.2.1.2.2.1	4.6.2
147	Launch delay	a	----	3.5.2.1.2.2.2	4.6.2
148.	Fuze grounding	a	----	3.5.2.1.2.2.3	4.6.2
149.	Launching signal (squib pulse)	a	----	3.5.2.1.2.2.4	4.6.2
150.	Squib grounding	a	----	3.5.2.1.2.2.5	4.6.2
151.	Operational control	a	----	3.5.2.2.1	4.6.2
152.	Rockets	a	----	3.5.2.2.1.1	4.6.2
153.	Accuracy	100%	----	3.5.2.2.1.2	4.6.2
154.	Distribution of weight	100%	----	3.5.2.2.1.3	4.6.2

NOTES:

a. Three samples: reject on one failure.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:35Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-R-70503A(AR)

PARAGRAPH	TITLE		SHEET 5 OF 5		DRAWING NUMBER 9324106
4.5.2.1	Rocket Management Subsystem				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
155.	Malfunction indicator	100%	----	3.5.2.2 1.4	4.6.2
156.	Weight		100%	3.7	4.6.5
157.	Identification and marking		100%	3.8	4.6.11
158.	Identification plates		100%	3.8.1	4.6.11
MINOR:					
201.	Workmanship		2.5%	3.9	4.6.7

NOTES:

DPSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:35Z
Check the source to verify that this is the current version before use.

4.5.3 Testing. The tests (First Article and Quality Conformance listed herein, shall be performed on inspection lots as defined in 4.5.1 of this specification. The sampling plans shall conform to the provisions of 4.5.2 above.

4.5.4 Inspection equipment. The inspection equipment required to perform the Inspections and tests prescribed in this specification is identified-in the "Paragraph Reference/Inspection column in the tables, starting with paragraphs 4.5.2.1 and test methods Paragraph (see 4.6). The contractor shall submit for approval" inspection equipment designs in accordance with the terms of the contract. See 6.3 herein.

4.6 Methods of inspection. Any unit which fails to comply with the specified requirements or evidence degradation of its operational performance shall be classed defective. Test equipment and procedures shall be satisfactory to the contracting officer. See 4.5.4.

4.6.1 Materials, components and processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, sub-assemblies, and materials) have been inspected and tested and found to comply with their respective drawing and specification requirements, and that all specified manufacturing processes have been followed.

4.6.1.1 Visual and mechanical inspection. The visual, manual and mechanical inspections and tests shall verify compliance with the requirements of Sections 3 and 5 of this specification in accordance with 4.5.2 and Table IV.

4.6.2 Performance test. The Rocket Management Subsystem shall be tested for compliance with specified performance requirements. Any M138-Rocket Management Subsystem which fails to comply with the specified requirement or evidence of degradation of its operation shall be classed defective. Test equipment and procedure shall be satisfactory to the contracting officer (see 4.5.4).

4.6.3 Interchangeability (first article inspection only). The Rocket Management Subsystem shall be subjected to the interchangeability tests specified (see 3.5.1). At the discretion of the Government representative, an interchangeability retest may be allowed. Failure during the retest shall cause rejection of the first article. A sample of five Rocket Management Subsystem from each retest shall be tested using the same procedures specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

4.6.4 Environmental tests (first article inspection only).

4.6.4.1 Temperature-altitude. The equipment shall be subjected to the test of Method 504.1 of MIL-STD-810 for category 3 equipment with the following exceptions:

a. Use 20,000 feet where 15,000 feet is specified.

b. Do not exceed the temperature limits of 3.6.1.2.

4.6.4.1.1 High temperature. The high temperature test requirements are satisfied by 4.6.4.1. No separate test is required.

4.6.4.1.2 Low temperature. The equipment shall be subjected to the test of Method 502.1, Procedure I of MIL-STD-810, except maximum low temperature to be -65°F.

4.6.4.2 Humidity. The equipment shall be subjected to the test of Method509.1 of MIL-STD-810.

4.6.4.3 Sand and dust. The equipment shall be subjected to the test of Method 510.1 of MIL-STD-810, Procedure I, with the exception that for equipment mounted internal to the aircraft, the air velocity in Steps 1, 2, and 3 shall be 200 + 100 fpm. Step 3 may proceed immediately after stabilization in Step 2, if desired.

4.6.4.4 Fungus. The equipment shall be subjected to the test of Method 508.1 of MIL-STD-810, Procedure 1. Documentary evidence acceptable to the procuring activity that the material will not be nutrients for fungi may be used in place of the tests.

4.6.4.5 Explosive atmosphere. The equipment shall be subjected to the test of Method 511.1 of MIL-STD-810. Procedure I, except test to be limited to maximum altitude of 20,000 feet.

4.6.4.6 Rain. Method 506.1, Procedure I of MIL-STD-810 shall apply for the-rations Unit only. The Display Unit will not be subjected to the rain test. During each 30-minute rain period, the wind shall be maintained for 15 minutes commencing 5 minutes after the start of the period as specified in the procedures. The equipment shall be operated during the last 10 minutes of the 30-minute period.

4.6.4.7 Service environment. The equipment shall be tested in compliance with the requirement of Section 3 of this specification in accordance with 3.6.2.

4.6.4.7.1 Vibration. The equipment shall be subjected to Method 514.2-3 of MIL-STD-810, Procedure I, Category C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

4.6.4.7.2 Shock. The equipment shall be subjected to the Test Method 516.2 of MIL-STD-810, Procedure I.

4.6.4.7.2.1 Bench handling. The equipment shall be subjected to the Test Method 516.2 of MIL-STD-810, Procedure V.

4.6.5 Weight. Verify by weighing the RMS to determine that the RMS weight is 16.88 pounds or less.

4.6.6 Identification plate. Verify by observation that the identification plate meets the requirement of paragraph 3.8.1.

4.6.7 Workmanship. The requirement of 3.9 shall be verified by continous inspection of all parts and assemblies to assure conformance to high quality workmanship.

5. PACKAGING

5.1 Preservation, packaging, packing and marking for the Rocket Management subsystem shall be in accordance with the respective Packaging Data Sheets listed below at the level of protection specified in the contract (see 6.2b): Display Unit per PDS 9324107 and the Operation Unit per PDS 9324108.

5.2 Commercial packaging shall be in accordance with ASTM-D-3951.

6. NOTES

6.1 Intended use. The Rocket Management Subsystem is intended for controlling the fuze setting and firing of 2.75 Inch Aerial Rockets.

6.2 Ordering data. Procurement documents shall specify the following:

6.2.1 Procurement requirements

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Serialization requirements, if applicable.

d. Quality Conformance Inspection, if other than specified in Section 4 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

e. First Article sample requirements, if other than specified in Section 4 of this specification.

f. Packaging requirements, if other than specified in Section 5 of this specification.

g. Certificates of conformance for each lot or shipment of product.

h. Location to which items are to be shipped.

6.2.2 Contract data requirements. Contract data requirements for inspection equipment design shall conform to Data Item Description DI-R-1714, Tailored.

6.3 Submission for inspection equipment design approval. See MIL-W-63150. Equipment designs shall be submitted as required to: Commander, AMCCOM, ATTN: AMSMC-QAF-I(D), Dover, NJ 07801-5001. Letter of submittal shall state contractor, contract number, specification number, item nomenclautre, and classification of defects and test paragraphs.

6.4 Submission of results of contractor-conducted examinations and tests. Unless otherwise specified by the Contracting Officer, the contractor shall forward requested records of examinations or tests to: Commander, AMCCOM, ATTN: AMSMC-QAF-S(D), Dover, NJ 07801-5001.

6.5 Drawings. Drawings listed in Section 2 of this specification, under the heading US Army Armament Research and Development Center (ARDC), may also include drawings prepared by and identified as US Army Armament Research and Development Command (ARRADCOM), Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.6 Previous Issues. MIL-R-70503A(AR) is being released as a needed administrative correction to the previous issue and, therefore, contains no technical corrections or differences from the original version.

Custodian:
Army - AR

Preparing activity:
Army - AR

Project Number 1310-A351

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT MUNITIONS & CHEMICAL COMMAND
ATTN" AMSMC-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-R-70503A	ROCKET MANAGEMENT SUBSYSTEM MIL38

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:35Z
Check the source to verify that this is the current version before use.