NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/28C
30 September 1996
SUPERSEDING
MIL-R-41819/28B
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, OPERATIONAL DISTINGUISHING DEVICE, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

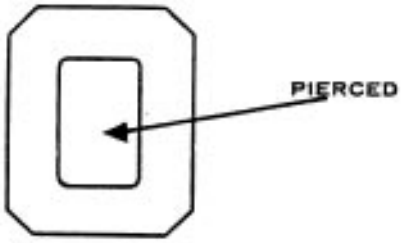

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated (Red Brass Only), Mirror-like Polished and shall match TIOH Metal Finish 16.

DIMENSIONS:
HEIGHT: 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
WIDTH: 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:
1. Operational Distinguishing Device "O" ribbon attachment shall be die cut.

2. Piercing shall be as indicated.

3. The attaching device shall be two prongs. One prong shall be located at each intersection of the horizontal center line of the device and the center of the vertical arms.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:55Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Coast Guard - CG

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:55Z
Check the source to verify that this is the current version before use.