MIL-B-29110B(NU)
25 February 1981
SUPERSEDING
MIL-B-29110A(SA)
25 October 1974

MILITARY SPECIFICATION

BAG, LAUNDRY, SUBMARINE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of laundry bag fabricated from nylon duck material.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
V-T-295	-	Thread, Nylon
DDD-L-20	-	Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-T-5038	-	Tape, Textile and Webbing, Textile Reinforcing, Nylon
MIL-C-7219	-	Cloth, Duck, Nylon
MIL-F-10884	-	Fasteners, Snap
MIL-B-17757	-	Boxes, Fiberboard (Modular Sizes)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA., 01760 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:33Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Traffic Department, 1616 P Street, N.W., Washington, D.C., 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:33Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Base cloth. The base cloth shall conform to type III, Class 1 of MIL-C-7219 and shall be natural in color.

3.3.2 Fasteners, snap. Snap fasteners shall conform to style 2, finish 4 of MIL-F-10884 and shall consist of a 24-line (size 1 or 2) button with socket for the female half and a size 1 or 2 eyelet with stud for the male half.

3.3.3 Webbing, nylon. The nylon webbing shall be one-inch wide natural in color conforming to type IV of MIL-T-5038.

3.3.4 Thread. The thread used for the manufacture of the bags shall be nylon or polyester.

3.3.4.1 Nylon thread. The nylon thread shall conform to types I, II and III, class 2, sizes B and E of V-T-295 and shall be natural White AG, Cable No. 66049.

3.3.4.2 Polyester thread. The polyester thread shall conform to types I, II and III, class 3, sizes B and E of V-T-285 and shall be natural White AG, Cable No. 66049.

3.3.5 Identification label. Each bag shall have an identification label conforming to type III or IV, class 5 of DDD-L-20. The printing shall be clearly legible after accelerated laundering. The label shall bear the following inscription:

BAG, LAUNDRY, SUBMARINE
CONTRACT NO: DLA-000-00-0-0000 (Example)
STOCK NO.: 8465-00-000-0000 (Example)
NAME OF CONTRACTOR:

3.4 Design. The laundry bag shall be cylindrically shaped with an opening at the top extending across the entire length. The bag shall have 4 hanger-straps equally spaced along the top with snap fastener closures. The bag closure shall be accomplished by straps passing over the bag opening and secured in position by snap fasteners (see Figure 1).

3.5 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall control.

3.6 Patterns. Standard patterns will be furnished to the contractor by the Government for use in cutting his working patterns (see 6.3). The patterns allow 3/8 to 1/2 inch for all seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

3.6.1 List of pattern parts. The component parts of the bag shall be cut from materials as specified and in accordance with the following pattern parts:

Materials	Nomenclature of Pattern parts	Cut parts	
		With Attached Facings	With Separate Facings 1/
Base Cloth	Body	1	1
	End	2	2
	Facing (upper)	-	1
	Facing (lower)	-	1
Webbing, nylon	Hanger strap	2	2
	Hanger-closure strap	2	2
	Closure strap	2	2

1/ Pattern set A.

3.7 Construction.

3.7.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same operation, any one may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats or open seams will result.

*3.7.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/2 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks and two or more consecutive skipped or runoff stitches shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (including 401 stitch type) shall be repaired by using 301 stitch type.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7.4 Bartacks. Bartacks shall be 3/4 (± 1/16) inch long and 1/8 (± 1/32) inch wide and shall contain 42 stitches. Bartacks shall be free from thread breaks, loose or skipped stitches.

3.7.5 Setting of snap fasteners. Holes punched before inserting the male or female parts of the fastener shall be smaller than the outside diameter of the fastener tubes so that the tubes must be forced through the holes. The fastener shall be securely clinched without cutting the fabric.

3.8 Manufacturing operations requirements. The bags shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations, provided the finished bags are identical to that produced by following the sequence of operations as listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of bag

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting All component parts shall be cut in strict accordance with Government patterns furnished, which show shape, directional lines and notches for proper assembly of all parts.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Make body (when attched facings are used)					
	a. Turn under the body lower facing as indicated by marks on pattern and stitch 3/16 to 1/4 inch from the folded edge. Then turn under the free edge of the lower facing, 3/8 to 1/2 inch, and stitch 3/16 to 1/4 inch from the folded edge.	301 or 401	EFt-2 (inverted)	6-8	IE or IIE	IE or IIE
	b. Turn under the body upper facing as indicated by marks on pattern and stitch 3/16 to 1/4 inch from the folded edge. Then turn under the free edge of the upper facing, 3/8 to 1/2 inch, and stitch 3/16 to 1/4 inch from folded edge.	301 or 401	EFt-2 (inverted)	6-8	IE or IIE	IE or IIE
	OR Make body (when separate facings are used -- pattern set A)					
	c. Join the lower facing and body, face to face, stitching 3/8 to 1/2 inch from the raw edges.	301 or 401	SSe-2(a)	6-8	IE or IIE	IE or IIE

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of bag (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Make body (when separate facings are used - pattern set A (cont'd)					
	d. Turn and top stitch, 3/16 to 1/4 inch from the folded edge.	301	SSe-2(b)	6-8	IE or IIE	IE or IIE
	e. Turn under the free end of the lower facing 3/8 to 1/2 inch and stitch 3/16 to 1/4 inch from the folded edge.	301	LSd-1	6-8	IE or IIE	IE or IIE
	f. Join the upper facing and body, face to face, stitching 3/8 to 1/2 inch from the raw edges.	301 or 401	SSe-2(a)	6-8	IE or IIE	IE or IIE
	g. Turn and top stitch, 3/16 to 1/4 inch from the folded edge.	301	SSe-2(b)	6-8	IE or IIE	IE or IIE
	h. Turn under the free end of the upper facing 3/8 to 1/2 inch and stitch 3/16 to 1/4 inch from the folded edge.	301	LSd-1	6-8	IE or IIE	IE or IIE
4.	Mark identification label Mark the identification label on the lower facing. The marking shall be centered (see 3.3.5).					
5.	Attach hanger straps a. Sear the cut ends of the hanger strap to prevent ravelling.					
	b. Attach a stud and socket to the hanger strap as indicated by marks on pattern.					
	c. Attach the strap to the body with two bartacks. The straps shall be positioned where indicated by marks on the pattern.	Bartack		see 3.7.4	IIB or IIIB	IB or IIIB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of bag (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Attach hanger-closure straps					
	a. Sear the cut ends of the hanger-closure strap to prevent ravelling.					
	b. Attach two studs and one socket to the hanger-closure strap as indicated by marks on pattern.					
	c. Attach the strap to the body with two bartacks. The strap shall be positioned where indicated by marks on the pattern.	Bartack		see 3.7.4	IB or IIB or IIIB	IB or IIIB
7.	Attach closure straps					
	a. Sear the cut ends of the closure strap to prevent ravelling.					
	b. Attach one socket to the closure strap as indicated by mark on pattern.					
	c. Attach the strap to the inside of the body with two bartacks. The strap shall be positioned where indicated by marks on the pattern.	Bartack		see 3.7.4	IIB or IIIB	IB or IIIB
8.	Attach ends to body					
	a. Overedge stitch the raw edges of the ends and body.	503 or 504 or 505	EFd-1	6-8	IE or IIE	IE or IIE
	b. Stitch together (face to face) the ends to the body, 3/8 (± 1/16) inch from the edge.	301	LSq-2(a)	6-8	IE or IIE	IE or IIE

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of bag (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Attach ends to body (cont'd) As an alternate, stitch together the bag body and end pieces.	515, 516 or 518	SSa-2	6-8	IE or IIE	IE or IIE
	The 301 or 401 stitches shall be approximately 3/8 inch from the edge of the fabric.	503 504	SSa-2	6-8	B	B
	c. Turn to finished position and top stitch, 3/16 (± 1/16) inch from the edge.	301	LSq-2(b)	6-8	IE or IIE	IE or IIE
	d. Place a bartack at each corner of the top opening, parallel to the ends of the body, with the stitching through the body, upper facing and lower facing. Each bartack shall be 1/4 to 3/8 inch from the end of the bag and centered 1/2 (± 1/8) inch from the folded edge of the top facing.	Bartack		see 3.7.4	IIB or IIIB	IB or IIIB
9.	Clean bag a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots and stains.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202640-20T21:33Z
Check the source to verify that this is the current version before use.

3.9 Finished dimensions. The finished dimensions shall be as follows:

a. The bag shall finish 25 (± 1/4) inches in length, measured from folded edge to folded edge.
b. The bag ends shall finish 8 (± 1/4) inches in diameter.
c. The finished position of the closure straps and the hanger-closure straps, measured from the bag edge nearest each strap to the center of each strap, shall be 8 3/4 (± 1/8) inches.
d. The finished position of the hanger straps, measured from the bag edge nearest each strap to the center of each strap, shall be 1 1/2 (± 1/8) inches.
e. The distance between the male snap fastener component and the corresponding female snap fastener component on both the hanger and hanger-closure straps shall be 5 3/4 (± 1/8) inches apart when measured from the center of each component.

3.10 Workmanship. The finished bags shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one completely fabricated bag. The lot size shall be expressed in units of bags.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:33Z
Check the source to verify that this is the current version before use.

4.4.2.1 Visual examination. The bags shall be examined for defects classified in accordance with the list below:

Defects	Classification Major	Minor
CLEANNESS		
a. One or more spots or stains		X
b. Thread ends not trimmed or loose thread not removed		X
COMPONENTS AND ASSEMBLY		
Any component part or required operation omitted (Unless otherwise classified herein)	X	
CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or not in accordance with specification requirements	X	
MATERIAL DEFECTS AND WORKMANSHIP		
a. Any weakening defects such as smash, float, loose slub	X	
b. Any hole, needle chew, cut, tear, mend, burn or drill hole	X	
c. Not natural color		X
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seam twisted, puckered or pleated (unless otherwise classified herein)		X
2. Part of bag caught in any unrelated operation or stitching	X	
3. Ends of all seams or stitchings when not caught in other seams or stitching backtacked less than 1/2 inch		X
4. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
5. Thread breaks, two or more skipped or runoff stitches overstitched less than 1/2 inch or more than 1 inch beyond defective stitching area		X
b. Stitching margin		
1. Irregular, i.e., unevenly gauged, not uniform		X
2. Beyond range specified		X

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:33Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
c. Open seams or runoffs		
1. Up to 1/4 inch inclusive		X
2. More than 1/4 inch	X	
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitute an open seam.		
d. Raw edges (securely caught in seam)		
1. More than 1/4 inch up to and including 1 inch		X
2. More than 1 inch	X	
NOTE: Use open seam classification for any raw edge not securely caught in seam.		
e. Seam and stitch types		
1. Not specified seam or stitch type	X	
f. Stitch tension		
1. Loose tension resulting in loose seam	X	
2. Loose tension on edge or topstitching resulting in loosely exposed loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X	
g. Stitches per inch (score only when condition exists on major portion of a seam)		
1. One stitch less than the minimum or 3 stitches in excess of the maximum specified		X
2. Two or more stitches less than the minimum specified	X	
h. Bartacks		
1. One missing		X
2. Two or more missing	X	
3. Stitching loose, skipped or broken		X
4. Not size specified		X
5. Number of stitches not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
MARKING		
a. Missing, incorrect or illegible		X
b. Misplaced		X
c. Strike-through of marking medium to bag face		X
SNAP FASTENERS		
a. Any omitted, malformed, damaged or misplaced	X	
b. Not size, style or finish specified		X
c. Clinched too tight cutting fabric or insecurely attached		X
STRAPS		
a. Any omitted	X	
b. Any strap end not seared		X
c. Not material specified		X

4.4.2.2 Dimensional examination. The bags shall be examined for dimensional defects. Any measurement deviating from the specified dimensions and tolerances shall be scored as a defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed as defects per 100 units, for the visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For examination in 4.4.2.1:		
Major	2.5	II
Total (Major and Minor combined)	6.5	II
For examination in 4.4.2.2:		
One class	2.5	S-3

4.4.3 Packaging examination An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per one hundred units.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:33Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, incorrect application of tape. Bulging or distortion of containers.
Content	Number of bundles per container is more or less than specified. Number of bags per bundle more or less than specified. 1/

1/ For this defect, only one bundle per container shall be examined.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each bag with the snap fasteners closed, shall be laid out flat front down. The ends of the bag shall be folded in toward the center almost meeting. The bag shall then be folded in half between the ends. The completely folded bag shall measure approximately 7 inches by 14 inches. Ten folded bags shall be evenly stacked in a bundle reversed end for end. Each bundle shall be securely tied at each end with cotton tape or twine.

5.1.2 Level C (Commercial packaging). Bags shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Sixty bags packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, three in length, one in width and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial kraft paper.

5.2.2 Level B. Sixty bags packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat, three in length, one in width and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial kraft paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial Packing). Bags, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bags are intended for use by naval personnel serving aboard submarines for storing soiled clothing.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Whether first article is required (see 3.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issued the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Review activity:
DPSC-TTEF

Preparing activity:
Navy - NU

Project No. 8465-N754

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:33Z
Check the source to verify that this is the current version before use.

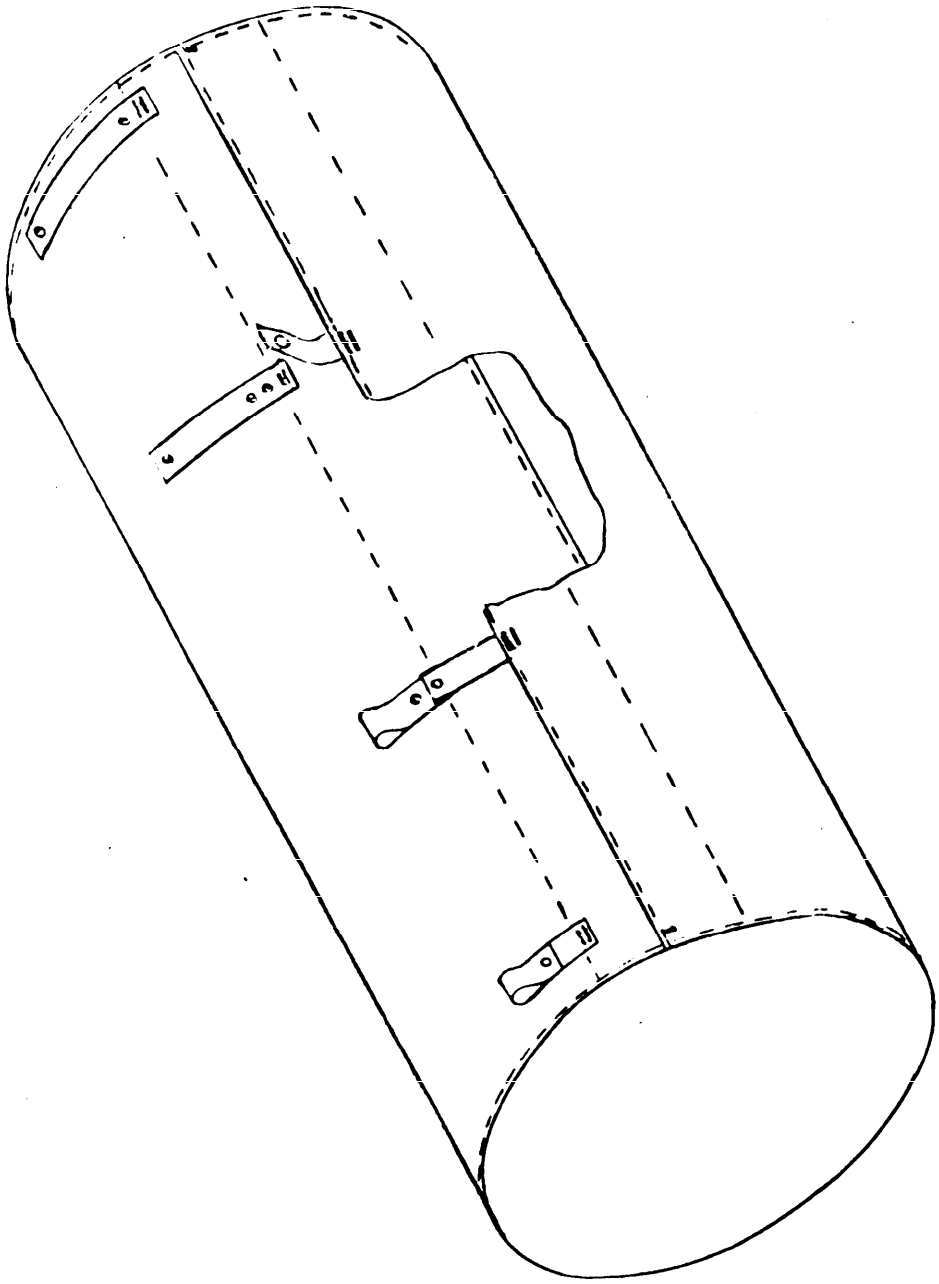


FIGURE 1 BAG, LAUNDRY, SUBMARINE

Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-B-29110B(NU) BAG, LAUNDRY, SUBMARINE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.