MIL-C-29111B
21 January 1980
SUPERSEDING
MIL-C-29111A
13 May 1975

MILITARY SPECIFICATION

COVERALLS, EXPLOSIVE HANDLERS (WOMEN'S)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a flame resistant cotton coverall fabricated from a 10.5 ounce carded cotton sateen fabric.

1.2 Classification. The coveralls shall be of one type in the following sizes and lengths (see 6.2).

Schedule of Sizes

Small (8-10)	Medium (12-14)	Large (16-18)	X-Large (20-22)

1.2.1 Lengths. Short, Regular and Long

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be address to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-F-21840	- Fastener Tapes, Hook and Pile, Synthetic
MIL-C-43122	- Cloth, Sateen, Cotton, Flame Resistant Treated

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
*MIL-STD-1668	- Provisions for Evaluating Quality of Cloth Coveralls

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Attn: Traffic Department, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

* 3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

* 3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.

3.3.1 Basic material. The basic material shall be unbleached, cotton sateen, flame resistant treated cloth conforming to class 1 of MIL-C-43122.

3.3.2 Thread. The thread shall be cotton, white AH, C.A. 66050, conforming to type IA1, ticket No. 30, 3-ply, and ticket No. 50, 3-ply of V-T-276.

3.3.3 Gimp. The gimp for reinforcing the buttonholes shall be natural and conform to type I or II, size 8, of V-T-280.

* 3.3.4 Identification and instruction label. Each coverall shall have a combination identification, size and instruction label conforming to type 1, class 14 of DDD-L-20. The printing shall show fastness to laundering. The label shall bear the following inscription:

COVERALLS, EXPLOSIVE HANDLERS (WOMEN'S)
FIBER CONTENT: Cotton (100%) Flame Resistant Treated
CONTRACT NO: DLA-100-00-0-0000 (Example)
STOCK NO: 8415-00-000-0000 (Example)
SIZE: Medium (12-14) (Example)
NAME OF CONTRACTOR:

1. Wear as outer garment.
2. Keep fastened to assure body protection.
3. Keep pocket clean and free of dust accumulation.
4. Keep sleeves fastened and adjusted.

WARNING: Upon removal of garment, brush off accumulated foreign matter thoroughly.
CLEANING: Wash at low temperature. Dry thoroughly.

3.3.5 Buttons. The buttons shall conform to type II, class D, styles 20 or 21, 30-line of V-B-871. The color shall be white, shade BA, cable No. 62031, and shall have a dull finish.

* 3.3.6 Fastener tape. The fastener tape to be used for securing the front opening, sleeve adjustment and collar closure shall be shade White 3054 conforming to type I, class 1 of MIL-F-21840. Both the hook and pile tapes shall measure 1 inch in width.

3.4 Design. The coveralls shall have a convertible collar, long sleeves with adjustment tapes, one small lattice pocket on right back hip and darts at bust, front and back waists and back hip areas. The front is closed by means of fastener tapes (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

3.4.1 Figure. Figure 1 is furnished for information only. In the event of any inconsistencies between this written specification and the figure, the specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/2 inch seam allowance for all double-lapped and double-stitched seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The component parts of the coveralls shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Basic material cotton sateen, flame resistant	Top back 1/	2
	Top front	2
	Trouser back	2
	Trouser front	2
	Collar	1
	Lapel facing	2
	Pocket strip	1
	Sleeve (one piece)	2
	Sleeve alternate:	
	Top sleeve	2
	Under sleeve	2

1/ The back may be cut as one piece with the seam allowance omitted.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the coveralls. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result. Unless otherwise specified, raise stitching or edgestitching shall be 1/4 to 5/16 inch from the edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.4 Buttonhole. The buttonhole shall be an eyelet-end, taper-bar type, worked over gimp with the purling on the outside and the ends of the buttonhole stitching and gimp securely tacked.

3.6.5 Bartacks. Unless otherwise specified, all bartacks shall be 3/8 to 1/2 inch long and 1/8 (± 1/32) inch wide.

3.7 Manufacturing operations requirements. The coverall shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed.

3.7.1 Marking. The cut part shall be marked, bundled or ticketed to insure uniform size throughout the garment. Any method may be used except:

(1) Metal fastening devices.
(2) Adhesive type tickets which show discoloration and which leave residue of the adhesive material after removal of the tickets.
(3) Sew-on tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*1.	Cutting. a. Cut the coverall in accordance with patterns which show directional lines, and marks and notches for proper assembly. Directional lines shall be placed in the warp direction of the material. The directional lines on the fronts and backs of the trouser parts may vary from the warp direction by not more than 2 1/2 inches. Measurements shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed 2 1/2 inches. The collar may be cut in either the warp or filling direction. The filling effect side of the material shall finish on the outside of the garment. b. Cut all component parts from the same piece of material except the hanger and lattice pocket stripping, which may be cut from ends. c. Cut the stripping for the hanger loop of sufficient width to finish 3/8 to 5/8 inch wide (see operation 4). d. Cut the stripping for the lattice pocket of sufficient width to finish as specified in operation 5a.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1668 shall be removed from production and replaced with non-defective and properly matched components.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Marking. Mark, ticket or bundle component parts, except parts cut from ends, to assure a uniform size assembly.					
4.	Make hanger loop.					
	a. Turn the edges of the hanger stripping (see 1.c) to the center and stitch the abutted edges with a row of stitches extending across and covering edges of the material.	406	EFh-1	10-14	50	50
	OR					
	b. Fold stripping with the raw edges turned in and stitch 1/16 to 1/8 inch from each edge.	301 or 401	EFp-2	10-14	30 30	30 50
	OR					
	c. Fold stripping with raw edges turned in and stitch 1/16 to 1/8 inch from turned in edge.	301 or 401	EFp-1	10-14	30 30	30 50
	OR					
	d. Turn in the edges of two pieces of stripping and stitch together with a row of stiching 1/16 to 1/8 inch from each edge.	301 or 401	EFn-2	10-14	30 30	30 50
	e. Turn a strip of material, folding one edge inwardly and join with two rows of stitching 1/16 to 1/8 inch from each edge. (If option to use safety stitching is exercised, overedging shall cover exposed raw edge of material. If 301 option is used, raw edge of material shall be selvaged or overedged.)	301 or 401 or 517 or 518	EFz-2	10-14	30 30 50 50	30 50 50 50
5.	Make lattice pocket (see figure 1)					
	a. Fold pocket stripping in half lengthwise, turn in the raw edges and stitch with two rows of stitching not less than 1/4 inch apart with one row 1/8 inch from the turned-in edge. The stripping shall finish 5/8 to 3/4 inch wide.	301 or 401	EFp-2	10-14	30 30	30 50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make lattice pocket (see figure 1) (cont'd)					
	OR					
	b. Fold stripping with the edges abutted at center and stitch with each row of stitching not less than 1/16 inch from edge and the covering stitch on the underside.	406	EFh-1	10-14	50	50
	OR					
	c. Fold stripping with both edges turned in and the turned-in edges abutted at center and stitch with a covering stitch.	105	EFae-1	10-14	30	
	d. Cut the strip into five pieces of equal length, 6 1/2 to 6 3/4 inches long. The pocket shall consist of three vertical and two horizontal strips.					
	e. Position one horizontal strip across and even with the top edges of three vertical strips, with the two ends of the horizontal strip turned under 3/8 to 1/2 inch. The folded ends of the horizontal strip shall extend 1/2 (± 1/8) inch beyond the ends of the vertical strips and the vertical strips shall be equidistance apart. Position the second horizontal strip centered across the vertical strips, with the two ends of the horizontal strip turned under 3/8 to 1/2 inch. Bartack or stitch the horizontal strips to the vertical strips at each crossing. The horizontal bartacks shall be placed along the upper edge of the horizontal strips (6 bartacks).	301 or bartack	LSa-1	10-14 or 28 per bartack	30 or 50	30 or 50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Set pocket. Position pocket on right back of trouser as indicated by marks on pattern, turn lower edges under 3/8 to 1/2 inch and bartack the lower and side ends of each latticed strip to the trousers (7 bartacks).	Bartack		28 per bartack	30 or 50	30 or 50
7.	Close bust, waist darts and hip darts. a. The darts shall be tapered on the inside without twists or puckers.					
	b. Fold and stitch darts as indicated by nothces on patterns and drill holes. The stitching shall taper to a point and extend approximately 1/4 inch beyond the drill hole.	301	OSf-1	10-14	30	30
8.	Make collar. Fold collar in half lengthwise and stitch side edged 3/8 inch from the raw edge. The seam shall not extend to the ends of the collar to allow for collar stitching and turning. Trim points, turn to finished position, and force out edges.	301	SSe-2(a)	10-14	30	30
9.	Join top back sections and attach label. a. If the back is cut in two pieces (see 3.5.1), join the top back sections at the center back with a double-lapped and double-stitched seam. The seam may be lapped in either direction but shall be lapped in the same direction of the seat seam (see operation 10).	301 or 401	LSc-2	10-14	30 30	30 50
	b. Center and stitch label, all four sides, over the center back seam approximately 3/4 inch below the neckline seam. If back is cut in one piece, position label in the center of the back.	301	LSbj-1	10-14	30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Join seat of trouser back sections. Join the seat of trouser back sections with a double-lapped and double-stitched seam (see operation 9.a).	301 or 401	LSc-2	10-14	30 30	30 50
11.	Join top back sections to trouser back sections at waist. Join top back sections to trousers back sections with a double-lapped and double-stitched seam with the trousers overlapping the top back and catching the fold of the darts toward the center back with the dart seams (top back and trouser back) staggered 3/8 (± 1/8) inch.	301 or 401	LSc-2	10-14	30 30	30 50
12.	Join top front sections to trouser front sections at waist. Join the top front sections to trouser front sections with a double-lapped and double-stitched seam with the trousers overlapping the top front and catching the fold of the dart towards the center front.	301 or 401	LSc-2	10-14	30 30	30 50
13.	Form front opening.					
	a. Overedge stitch left and right front fly opening.	503, 504 or 505	EFd-1	8-10	50	50
	b. Position hook portion of fastener tape 5/16 (± 1/16) inch from folded edge of right front starting at bottom of fly opening continuing to step edge of front opening.					
	c. Stitch fastener tape on all four sides.	301	LSbj-1	10-14	30	30
	d. Position pile portion of fastener tape, even with the folded edges of left front, starting at bottom of fly opening continuing to bottom folded edge of lapel facing.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Form front opening. (cont'd)					
	e. Stitch fastener tape on all four sides.	301	LSbj-1	10-14	30	30
	NOTE: Bottom edge of pile portion of fastener tape shall be trimmed and tapered. Pile shall not show on outside when front is closed.					
14.	Attach lapel facings.					
	a. Turn in bottom edge of each lapel facing over step edge of front fly opening. Stitch 1/16 inch from the folded edge catching front.	301	LSb-1 and EFa-1	10-14	30	30
	b. Stitch a diagonal buttonhole 3/4 to 1 inch finished cut length on right front lapel facing as indicated by marks on pattern.	Button-hole		44-46 per buttonhole including tack	30	50
	OR As an alternate, pile and hook fastener tape closure may be used (see operation 24).					
	c. Stitch, 3/8 inch from the raw edge, the lapel facing to fronts. Trim points, turn to finished position and force out points.	301	SSe-2(a)	10-14	30	30
	d. Neck portion of lapel facings may be stay stitched. The stitching shall not extend to the end of lapel facing to allow for turning.	301	SSa-1	10-14	30	30
	e. Turn inner edge of the lapel facings and stitch 1/16 inch from the folded edge, continuing the stitching down the front fly opening adjacent to the serged edge. If back edge of facing has a selvage, do not turn edge under.	301 or 401	LSd-1 and LSa-1	10-14	30 or 30	30 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Join crotch.					
	a. Join the front sections with a double-lapped and double-stitched seam with the right over the left.	301 or 401	LSc-1	10-14	30 30	30 50
	b. Tack or bartack the top edge (below fly opening) double-stitched seam with the right over the left.	301 or bartack		10-14 28 per bartack	30 or 50	30 50
16.	Join shoulders.					
	Join the shoulders with a double-lapped and double-stitched seam with the fronts over the back.	301 or 401	LSc-2	10-14	30 30	30 50
17.	Set sleeves.					
	a. Set and join the sleeves with a double-lapped and double-stitched seam with the fronts and back over the sleeves.	301 or 401	LSc-2	10-14	30 30	30 50
	b. When sleeve is two piece, join the top sleeve to the undersleeve with a double-lapped and double-stitched seam with the topsleeve over the undersleeve.	301 or 401	LSc-2	10-14	30 30	30 50
18.	Join underarm and side seams.					
	Join the underarm and side seams in one continuous operation with a double-lapped and double-stitched seam with the fronts over back catching the fold of the dart towards the waist. The seams at the armhole and waist junction shall not be staggered more than 3/8 inch (measured from center of seam to center of seam).	301 or 401	LSc-2	10-14	30 30	30 50
19.	Join inseams.					
	Join inseams in one continuous operation with a double-lapped and double-stitched seam with the fronts over back. The seams at the crotch junction shall not be staggered more than 3/8 inch (measured from center of seam to center of seam).	301 or 401	LSc-2	10-14	30 30	30 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Hem bottom of sleeves and trousers. Hem bottom of sleeves and trousers with the raw edge turned in and the stitching 1/16 to 1/8 inch from the folded edge. The hem shall finish 1/2 (± 1/8) inch wide.	301	EFb-1	10-14	30	30
21.	Join collar. a. Join, 3/8 inch from the raw edge, the undercollar to the neckline, centered and catching the ends of the hanger loop over the center back (1/2 inch off tolerance). The free opening of the hanger loop shall measure 2 (± 1/4) inches.	301	SSa-1	10-14	30	30
	b. Turn in lower edge of topcollar and stitch all plies 1/16 to 1/8 inch from folded edge.	301	LSb-1	10-14	30	30
22.	Set fastener tapes. a. Stitch a 2 1/2 (± 1/4) inch pile tape on front of sleeve and a 2 1/2 (± 1/4) inch hook tape on back of sleeve, positioned 2 1/2 (± 1/8) inches from the bottom of hemmed sleeve and so that one end will be caught in the underarm seam (see operation 18).	301	SSau-1	10-14	30	30
23.	Stitch lapel facings and collar. Topstitch 3/16 to 1/4 inch from the folded edge, the lapel facings and collar in one continuous operation.	301	SSe-2(b)	10-14	30	30
24.	Attach hook and pile tape to lapel facings. When alternate hook and pile closure is used the following operations shall be performed:					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Table I - Construction of coveralls (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
24.	Attach hook and pile tape to lapel facings. (cont'd)					
	a. Position pile portion of fastener tape on right front lapel facings. The top and front edge of pile tape shall be 1/8 inch from top and front folded edges of lapel facings. The pile tape shall measure 1 1/2 (± 1/16) inches long along top edge and 1 (± 1/16) inches long along lower bottom edge.					
	b. Stitch pile tape along all four sides, the top and front edges may be caught in the topstitching of lapel facings (see operation 25).	301	LSbj-1	10-14	30	30
	c. Position on left front a hook portion of fastener tape to correspond with pile portion on right front, so that when closed a smooth closure is obtained with neck edges together.					
	d. Stitch hook tape on all four sides.	301	LSbj-1	10-14	30	30
25.	Mark and sew buttons.					
	Mark and sew one button on left front to correspond with buttonhole in right front lapel facing.	101 or 301		20-24 per button	30	
	NOTE: When alternate, hook and pile closure is used, omit operation 25.			14-16 per button	30	30
26.	Clean coveralls.					
	a. Trim all ends of stitching and remove all loose threads.					
	b. Remove all spots, stains and size marking.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements. Sizes and measurements of the finished coveralls shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

	Bust (A)	Waist (B)	Sleeve Inseam (C)			Leg Inseam (D)			Hip (E)
			Short	Reg	Long	Short	Reg	Long	
Small (8-10)	40	33	17	18	19	27 3/4	28 3/4	30	39
Medium (12-14)	44	37	17	18	19	27 3/4	28 3/4	30	43
Large (16-18)	48	41	17	18	19	27 3/4	28 3/4	30	47
X-Large (20-22)	52	45	17	18	19	27 3/4	28 3/4	30	51
Tolerance	± 1	± 1	±1/2	±1/2	±1/2	± 3/4	± 3/4	±3/4	± 1

(A) Bust - Twice the measurement taken across the front at base of armhole (junction of seam) from folded edge to folded edge. Coveralls shall be fully fastened, laid out flat and smooth.
(B) Waist - Twice the measurement taken across waist from folded edge to folded edge. Coveralls shall be fully fastened, laid out flat and smooth.
(C) Sleeve inseam - Measure inseam from base of armhole to bottom of sleeve.
(D) Leg inseam - Measure inseam from crotch seam to bottom of leg.
(E) Hip - Twice the measurement taken across the front seven inches down from waist folded edge to folded edge. Coveralls shall be fully fastened, laid out flat and smooth.

* 3.9 Workmanship. The finished coveralls shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point values.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

* 4.4 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-1668.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item. The end item examination provisions for finished coveralls shall be as specified in MIL-STD-1668.

4.4.3 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1668.

5. PACKAGING

* 5.1 Preservation-Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of fully fastened coveralls shall be folded to approximately 23 by 14 1/2 inches in such a manner that the size label is clearly visible to permit ready identification.

5.1.2 Level C (Commercial packaging). Coveralls shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Fifteen coveralls of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat 15 in depth, with every other one reversed, within a shipping container. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B. Fifteen coveralls of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be packed flat 15 in depth, with every other one reversed, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing). Coveralls, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes container therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The coveralls are intended for wear by female personnel of the Department of Defense.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of this specifications are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - GL
Navy - NU

Review activities:
Army - MD
Navy - OS
DPSC - CT

Preparing activity:
Navy - NU

Project No. 8415-0190

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

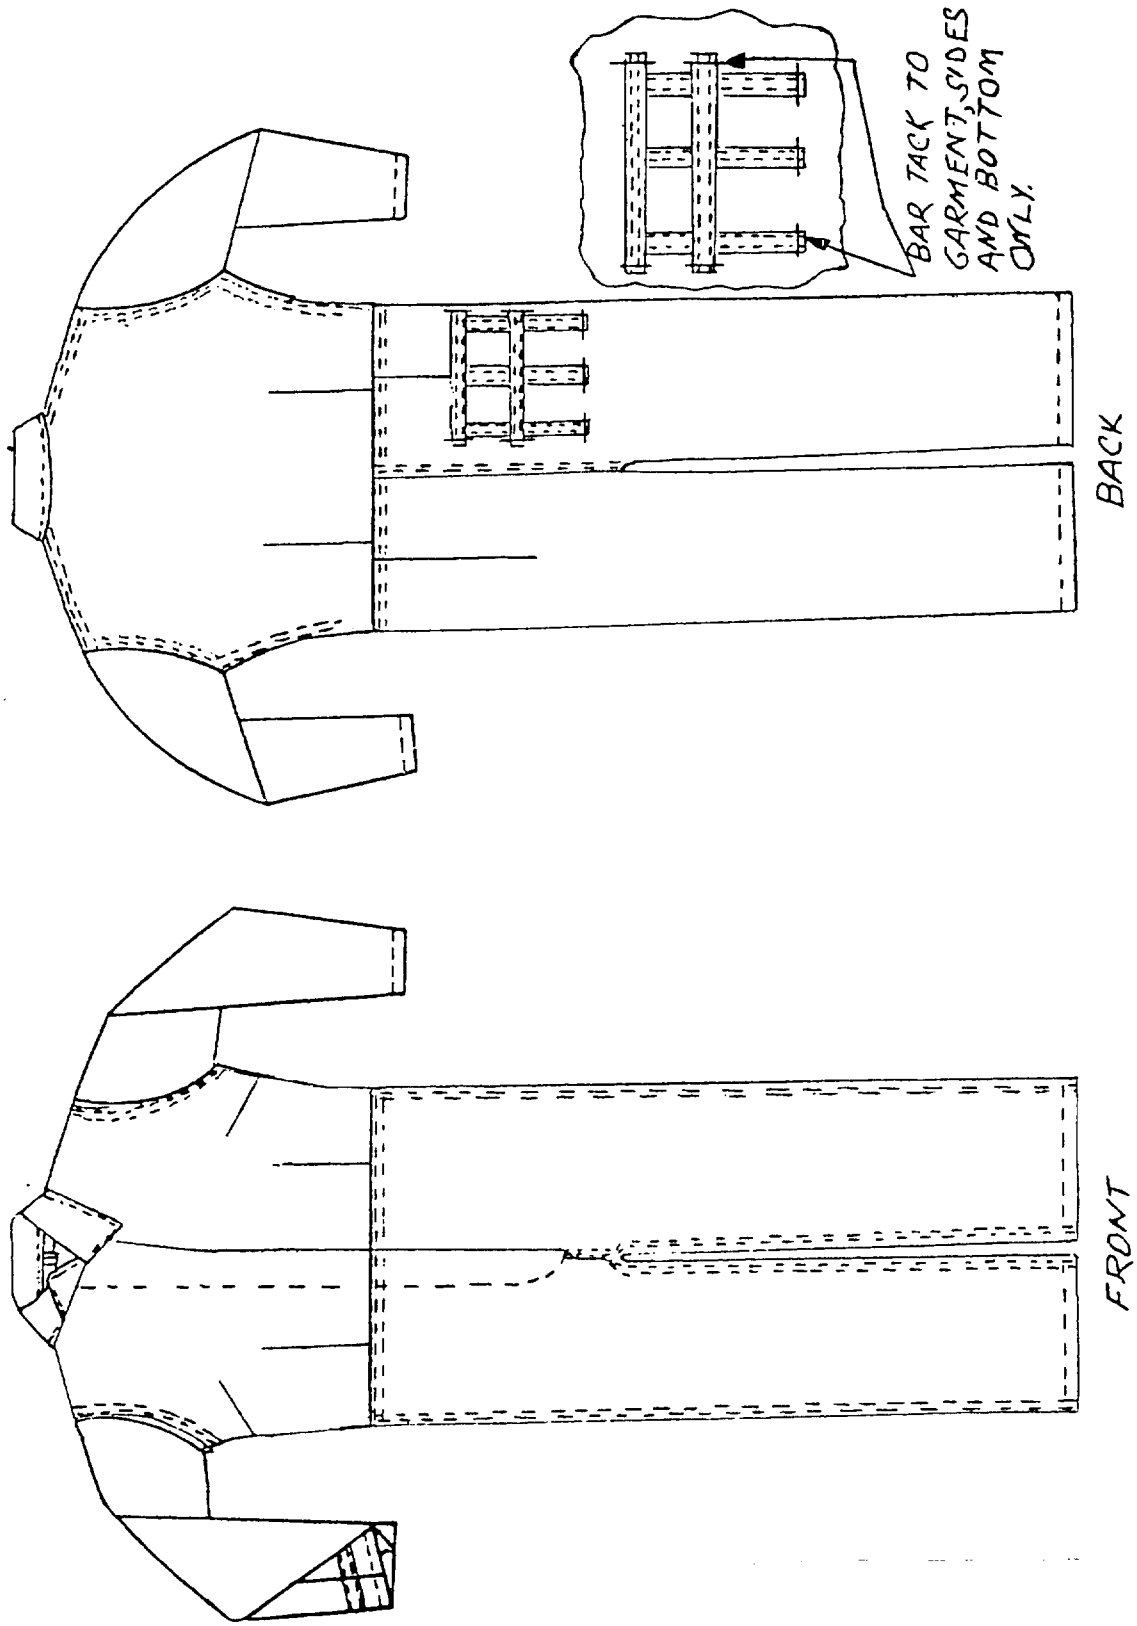


FIGURE 1. COVERALLS, EXPLOSIVE HANDLER'S (WOMEN'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

OCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-29111B COVERALLS, EXPLOSIVE HANDLERS (WOMEN'S)

AME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT
SE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

. REMARKS

UBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

)D FORM 1426
1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:33Z
Check the source to verify that this is the current version before use.