MIL-T-29112C
3 March 1987
SUPERSEDING
MIL-T-29112B
10 Sept 1980

MILITARY SPECIFICATION

TRUNKS SWIMMERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a khaki, semi-boxer style swim trunk fabricated of a khaki polyester/cotton or cotton twill material.

1.2 Classification. The trunks shall be of one type in the following sizes (see 6.2):

1.2.1 Sizes. 28, 30, 32, 34, 36, 38 and 40

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic and Pearl)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton, Gimp, Buttonhole
*NN-P-71	- Pallet, Material, Handling, Wood Stringer Construction 2 Way and 4 Way
CCC-C-461	- Cloth, Uniform Twill, Cotton
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-R-3390	- Rings, Dee
*MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way
MIL-B-17757	- Boxes, Shipping Fiberboard (Modular Sizes)
MIL-C-29121	- Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43624	- Thread, Polyester, Spun

STANDARDS

FEDERAL

FED-STD-191	-Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
*MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

*THE COLOR ASSOCIATION OF THE UNITED STATES, INC.
Standard Shades for Buttons
Standard Shades for Threads

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Avenue, New York, NY 10016).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials. (See 6.5).

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

* 3.3.1 Basic material. The basic material shall conform to Class 1 of MIL-C-29127 or, as an alternate, Cloth, Uniform Twill, Cotton, Types I, II, III or IV of CCC-C-461. The color shall be khaki 3729. In addition to the colorfastness requirements of the referenced specification, the dyed cloth shall show "good" colorfastness to combined laundering and bleaching, Test Method 5605 of FED-STD-191.

3.3.2 Thread.

* 3.3.2.1 Thread, covered, polyester. The covered polyester thread shall conform to ticket No. 70, 2 or 3 ply; ticket No. 50, 2 or 3 ply; ticket No. 20, 2 or 3 ply of MIL-T-43548. As an alternate, spun polyester thread, ticket No. 70, 3 ply; ticket No. 50, 3 ply; and ticket No. 30, 3 ply of MIL-T-43624 may be substituted for ticket Nos. 70, 50 and 20, 2 or 3 ply, respectively.

* 3.3.2.2 Thread, cotton. When the alternate basic cotton fabric is used, the cotton thread shall conform to type 1A3, ticket No. 70, 2 ply; ticket No. 50, 3 ply and type 1B3, ticket No. 20, 4 ply of V-T-276.

3.3.2.3 Color and colorfastness. The color for all threads shall be khaki P-1, Cable No. 66019. The dyed thread shall show fastness to light, laundering, and bleaching equal to or better than the standard sample when tested as specified in their respective specifications. When no standard sample is available, the dyed thread shall show "good" fastness to light, laundering, and bleaching when tested as specified in their respective specification.

3.3.3 Button. The buttons for the fly and waistband shall be type II, class D, styles 20 and 21, 24-line conforming to V-B-871. The color of the buttons shall be Khaki Shade AL, Cable No. 62026.

3.3.4 D-rings. Rings shall be brass and conform to class 1, configuration K, size 1 inch (A dim.) of MIL-R-3390 with a black chemical finish (see 6.4).

3.3.5 Gimp. The gimp used for reinforcing the buttonholes shall be cotton, vat dyed Khaki P-1, C.A. 66019 and shall conform to type I or II, size No. 8 of V-T-280.

* 3.3.6 Combination label. Each pair of trunks shall have a combination label listing identification, size, and instruction data conforming to Type I, class 14 of DDD-L-20. The fastness to laundering of DDD-L-20 shall apply. The label content shall be as follows:

TRUNKS, SWIMMERS
(65% Polyester and 35% Cotton) 1/
CONTRACT NO: DLA-100-00-0-0000 (Example)
STOCK NO: 8415-00-000-0000 (Example)
SIZE: (32) (Example)
NAME OF CONTRACTOR;

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the currentversion before use.

LAUNDERING INSTRUCTIONS
MACHINE WASH, WARM
TUMBLE DRY MEDIUM HEAT
OR

USE NAVEDTRA MANUAL 414-01-45-81
FORMULA III
TUMBLE DRY MEDIUM HEAT

1/ When the all cotton alternate base fabric is used, it shall read (100% cotton).

3.3.7 Adhesive shade and size tickets. Adhesive tickets, when used for shade or size marking, shall be of paper with a thermo-activated or pressure-sensitive adhesive. The adhesive shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the tickets.

3.4 Design. The trunks shall be semi-boxer type and consist of a buttoned fly, half belt with two (2) brass "D" rings. A patch pocket shall be located on the back on the right side (see Figure 1).

3.4.1 Figure. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/2 inch seam allowance for all doubled lapped and double stitched seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Materials	Pattern parts	Cut parts
Cloth, Twill Polyester/Cotton or Cloth, Uniform Twill Cotton	Front	2
	Back	2
	Fly-Left side (buttonhole)	1
	Fly lining - Right side	1
	Hip pocket	1
	Belt (Dee Ring Holder) (Right side)	1
	Belt (Left Side)	1
	Waistband (Roll Application)	No pattern
	Belt loops	No pattern
	Waistband lining (Roll Application)	No pattern

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

3.6 Stitches, seams, and stitchings. Stitch, seam, and stitching types as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on inside of trunks. Double needle stitching shall be 3/16 to 5/16 inch gauge with the outer row of stitching 1/16 inch from the finished edge. Edgestitching and topstitching shall be 1/16 inch from folded edge except as otherwise specified. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching.

3.6.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type. Bartacks shall be not more than 1/16 inch wide.

* 3.7 Manufacturing operations requirements. The trunks shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided the finished trunks are identical to that produced by following the sequence listed in Table I.

* 3.7.1 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pocket, directional lines for cutting and notches for the proper assembly of all parts. b. All component pattern parts shall be cut from one piece of material, except right fly lining, waistband, waistband lining, adjustment belt, belt loops, and left buttonhole fly which can be cut from ends, and when so cut shall approximate the shade of the main assembly.				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.				
3.	Shade and size marking. a. All parts shall be marked or bundled to insure proper shade and size identification, except parts cut from ends. b. The use of corrosive metal fastening devices or machine sewn-on tickets shall be prohibited. c. Adhesive type tickets, when used, shall conform to the requirements specified in 3.3.7. d. The use of ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance.				

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Make patch pockets.					
	a. Overedge top of pocket.	502 or 503 or 504 or 505	EFd-1	6-10	70	70
	b. Fold top of pocket under 3/4 to 1 inch, and stitch 1/4 inch from raw edge to form hem.	301	SSa-1	10-14	50	50
	c. Fold raw edges under 5/16 to 7/16 inch and stitch pocket to right rear panel, as indicated by pattern with top corners of pockets tacked with a triangular stitching. The base of the triangle shall be at top corner of pocket and apex at lower corner of the hem. The base of the triangle shall measure 3/16 to 5/16 inch wide.	301	LSd-1	10-14	50	50
	d. The shape of pocket shall be as shown by pattern.					
	e. The finished pocket shall measure 5-1/4 to 5-3/4 inches long and 5-1/4 to 5-3/4 inches wide for all sizes.					
	f. The pocket may be creased in an edge creasing machine to insure uniformity of shape and size.					
5.	Make buttonhole fly (left).					
	a. Fold buttonhole fly piece, as indicated by notches, lengthwise to finished position and overedge stitch the raw edge.	502 or 503 or 504 or 505	SSa-1	6-10	70	70
	b. Stitch buttonholes in fly piece (see operation 7).					
	c. Tack or bartack the fly piece, centered (± 1/8 inch) between buttonholes, to left front. The two bartacks or tacks shall be horizontal. Tacks shall extend from end to end of fly.	301 or bar-tack	SSv-1	10-14 23-24 per bartack	50 20	50 20

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Fold left front to finished position, with folded edge of fly piece 1/16 to 1/8 inch from front edges, as indicated by notches. Stitch inner edge of fly to front 3/16 to 1/4 inch from edges.	301	SSa-1	10-14	50	50
	e. The finished buttonhole fly shall measure 1-5/8 to 1-7/8 inches from edges.					
6.	Make button fly (right).					
	a. Overedge stitch straight raw edge of right fly piece.	502 or 503 or 504 or 505	EFd-1	6-10	70	70
	b. Sew right fly lining to right front fly extension, face to face, 1/4 to 5/16 inch from raw edges.	301	SSa-1	10-14	50	50
	c. Turn fly lining on seam on the inside and edgestitch through fly lining and seam allowance 1/16 inch from the folded edge.	301	LSq-1	10-14	50	50
	OR					
	Turn and fold front and fly lining smooth and flat to finished position, edgestitch through all plies 1/16 inch from folded edge.	301	SSc-1	10-14	50	50
	d. Stitch inner serged edge of fly lining to front.	301	SSa-1	10-14	50	50
7.	Make buttonholes.					
	a. All trunks shall have three buttonholes on the left fly, one buttonhole on right edge of waistband.					
	b. Buttonholes shall be 9/16 to 11/16 inch cut length, eyelet end, taper bar type, worked over gimp with both ends securely tacked, with purling on outside, except for buttonhole on waistband which shall be on the inside.	Button-hole		52-54 button-hole including tacks	20	20

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. The buttonholes shall be located as follows: (1) One horizontal buttonhole centered (1/4 inch off center tolerance) in the right end of waistband. The inside edge of eyelet shall be 9/16 to 11/16 inch from finished edge. (2) There shall be three horizontal buttonholes in the left fly piece. The inside edge of eyelets shall be 3/8 to 5/8 inch from inner edge of fly piece. The bottom buttonhole shall be located 2-3/8 (+ 1/8) inches from bottom end of fly piece and top buttonhole shall be located 3 (+ 1/8) inches from top edge of waistband. The remaining buttonhole shall be equally spaced (+ 1/8 inch) between top and bottom buttonhole.					
8.	Make belt loops. a. The belt loop shall be of sufficient width to finish 1/2 to 5/8 inch wide.					
	b. Fold loops to face side with raw edges abutted at center and double stitch not less than 3/16 inch gauge, using a cover stitch on the underside.	406	EFh-1	6-10	50	50
	OR					
	c. Fold loops lengthwise. Turn under both raw edges and stitch each edge 1/16 to 1/8 inch from the edge.	301 or 401	EFp-2	10-14	50 50	50 70
	OR					
	d. Fold loops face side in thirds with raw edges adjacent to folded edges. Fold under the exposed raw edges 3/16 to 1/4 inch and stitch 1/16 inch from folded edges.	301		10-14	50	50
	OR					
	e. Fold under both sides of raw edges with folded edges abutted and centered in loop with the covering stitch on the underside.	105	EFae-1	10-14	50	
	OR					

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Fold loop to the dimensions specified with the exposed raw edge 1/4 to 5/16 inch from the folded edge, with covering stitch on underside.	406	EFy-1	10-14	50	70
9.	Sew on buttons.					
	a. Attach three (3) buttons on right fly through all plies to correspond with buttonholes on left.	101 or 301		14-16 per button	20 20	 20
	b. Attach a button, centered on left end of waistband 1-3/16 to 1-5/16 inches from the folded edge. Measure from center of button.	101 or 301		14-16 per button	20 20	 20
10.	Trunk assembly.					
	a. Join fronts at crotch face to face in accordance with notches at base of fly. Stitch 7/16 to 9/16 inch from raw edge, simultaneously aligning fly opening.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Fold fronts to finished position, left over right with seam allowance in left front, positioning fly opening smooth and flat. Sew a double row of stitching 3/16 to 1/4 inch gauge and 1/16 inch from folded edges. Stitching shall extend and secure bottom fly opening 1/2 to 5/8 inch above base of fly.	301 or 401	LSq-2	10-14	50 50	50 70
	c. Join backs at center, back and front outseam and inseam with a double-lapped and double-stitched seam 1/4 inch gauge and 1/16 inch from folded edge.	301 or 401	LSc-2	10-14	50	50
	d. Turn under 1/4 to 3/8 inch the raw edges of each leg opening and stitch 1/16 inch from folded edge. The finished hem shall measure 1/2 to 5/8 inch wide.	301	EFb-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
11.	Waistband and belt loop assembly. The two belt loops shall be positioned on left side of waistband 2-1/16 to 2-3/16 inches apart, measured from center to center of loops, and 2-3/8 to 2-1/2 inches from finished front edges (measured from center of loop). Loop ends shall be inserted not less than 1/4 inch in bottom of waistband and caught in stitching. Waistband shall measure 1-3/8 to 1-5/8 inches wide. The belt loop opening shall finish 1-5/8 to 1-3/4 inches in length measured from stitching at top of waistband to bottom inside folded edge.					
	a. Place trunks between inner and outer waistband pieces. Fold under top and bottom edges of waistband 5/16 to 7/16 inch to finished position. Top stitch top and bottom of waistband pieces 1/16 to 1/8 inch from folded edges, simultaneously inserting loops on left front as specified (or loops may be prestitched to left front). OR	301 or 401	LSbc-2 and SSc-1	10-14	50 50	50 70
	b. When precreased waistband is used, insert trunks between inner and outer waistband pieces with raw edges even and topstitch 1/16 to 1/8 inch from folded edge on top and bottom of waistband. Precreased edges shall be 5/16 to 7/16 inch from raw edge.	301 or 401	LSbc-2	10-14	50 50	50 70
	c. Fold in ends of waistband even with fly opening edges. Top stitch 1/16 to 1/8 inch from folded edge.	301 or 401	SSc-1	10-14	50 50	50 70
	d. Position and stitch combination label on all four sides, 1/16 inch from edge, on waistband lining and center back of trunks.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make and attach left belt.					
	a. Turn under one raw end, fold belt in half lengthwise, with raw edges turned under 5/16 to 7/16 inch and stitch 1/16 inch from folded edges, continuing the stitching around folded end. Finished belt shall measure 1-1/16 to 1-3/16 inches wide.	301	EFp-2	10-14	50	50
	b. Fold under remaining raw edge 3/8 to 1/2 inch and stitch 1/16 inch from folded edge of belt to waistband 1-13/16 to 1-15/16 inches from finished edge of side seam, through all plies. Continue stitching 1/16 inch from edge of belt top and bottom of belt to the center of belt loop nearest fly, continuing down the width of belt with two rows of stitching.	301	SSb-1 and SSa-1	10-14	50	50
13.	Make and attach right belt strap.					
	*a. Fold belt in half lengthwise with raw edges turned under 5/16 to 7/16 inches and stitch 1/16 inch from folded edges and folded end. Finished belt shall measure 1-1/16 to 1-3/16 inches wide.	301	EFp-2	10-14	50	50
	*b. Insert belt through Dee rings and fold under 2-1/4 to 2-3/4 inches to form a loop. With Dee rings against the loop and even with edge of left waistband at fly opening, stitch end of belt to waistband through all plies, with two rows of stitching.	301	SSb-1	10-14	50	50
	*c. Fold under remaining raw edge 3/8 to 1/2 inch and stitch to waistband. Stitch top and bottom of belt to waistband 1/16 inch from edge, from the vertical stitched edge to back folded edge.	301	SSb-1	10-14	50	50
14.	Bartacking.					
	a. Stitch horizontal bartacks, 3/8 to 1/2 inch long at the following locations: (1) One across top of each belt loop with the top of belt loops turned under 1/4 to 3/8 inch and even with top of waistband. (2) One at lower end of fly closure across top ends of stitching of center front seam.	Bartack		28 per bartack	20	20

Source: https://assist.dla.mil -- Downloaded: 20261-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF TRUNKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
15.	Cleaning.				
	a. All ends of outside stitching shall be trimmed and loose ends removed from trunks.				
	b. Trim raw ends of belt loops.				
	c. Remove all spots and stains.				
	d. Remove all shade and size tickets.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of finished trunks shall be shown in Table II (see Figure 1). All measurements and tolerances are expressed in inches. For reference to the letters A, B, and C, see Figure 1.

Table II - Measurements of trunks

Size	A Waist	B Seat	C Side Length	D Leg Opening
28	28	36	10-3/4	11-3/4
30	30	38	10-7/8	12-1/8
32	32	40	11	12-1/2
34	34	42	11-1/8	12-7/8
36	36	44	11-1/4	13-1/4
38	38	46	11-3/8	13-5/8
40	40	48	11-1/2	14
Tolerance	+ 1 - 1/2	± 1	± 1/4	± 1/4

NOTE: Measurements shall be taken with the trunks laid flat and smooth with fly buttoned.

A. Waist - Measure the width across the top from side seam to side seam and multiply by two.

B. Seat - Measure across the seat from side seam to side seam approximately 6 inches from bottom of trunks and multiply by two.

C. Side length - Measure from bottom of waistband to bottom of finished hem, along side seam.

D. Leg opening - Fold inseam and outseam together, measure from the edges the width of each leg opening, with opening laid flat.

* 3.9 Workmanship. The finished trunks shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value of defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance shall be furnished for the Dee ring requirements as specified in 3.3.4.

4.4.2 Examination of the end item. The classification of defects found during the examination of the end item shall be in accordance with list shown in 4.4.2.1 and 4.4.2.2. The lot size shall be expressed in units of one trunk each. The unit of product for this visual examination shall be one trunk. The inspection levels and the acceptable quality levels shall be as specified in 4.4.2.3.

4.4.2.1 Visual examination. The trunks shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classifed in accordance with the list below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
*MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, cut, tear, smash, mend, needle chew, burn, drill hole or scorched area		
1. On outside	X	
2. On inside		X
b. Knot, large slub, snag, misweave, shade bar, coarse yarn, missing yarn, broken yarn, thin place, woven in waste or area of no dye penetration		
1. On outside	X	
2. On inside		X
c. Permanent fold or pleat in cloth caused by seaming or stitching		
1. On outside	X	
*SHADED PART		
a. On outside		
1. Any part shaded (except parts which may be cut from ends)	X	
2. Variation in shade within a part (except parts which may be cut from ends)	X	
3. Part cut from ends badly shaded		X
*CLEANNESS		
a. One or more spots or stains on outside		
1. Up to 1/2 inch		X
2. More than 1/2 inch	X	
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside		X
c. More than 5 thread ends not trimmed to 1/2 inch or less on inside		X
d. One or more shade or size tickets not removed		X
e. Any shade or size marking exposed or readily visible on outside of garment		X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
*COMPONENTS AND ASSEMBLY		
a. Any component not as specified	X	
b. Any operation not as specified (unless otherwise classified herein)	X	
c. Any component part or required operation omitted (unless otherwise classified herein)	X	
d. Any component part tight, twisted, distorted, pleated, full, misshaped, or puckered (unless otherwise specified herein)		X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X
*CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or in accordance with specification requirements	X	
SEAMS AND STITCHING		
*a. Accuracy of stitching:		
1. Seam puckered, pleated, irregular, wavy or edge not fully worked out		X
2. Part of trunks caught in any unrelated operation or stitching	X	
3. Needle perforations visible on outside, more than 1 inch		X
4. End of seam or stitching when not caught in another seam or stitching not securely backtacked or back stitched less than 3/8 inch (excluding attaching labels)		X
5. Stitch overlapping ends of thread break less than 1/2 inch		X
6. Not specified color thread used on outside		X
7. End of continuous line of stitching overlapped less than 1/2 inch		X
8. Label stitching not overlapped at end of stitching		X
*b. Gage of stitching and seam allowance:		
1. Stitching irregular, not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than half the length of seam)		X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X	
3. Width of seam allowance varies more than 1/16 inch from allowance specified (score only when condition exists on more than 1/2 the length of seam)		X
c. Open seams or runoffs		
1. Up to 1/4 inch inclusive		X
2. More than 1/4 inch	X	
*d. Runoff, skipped or broken stitches		
1. On joining seam - when resulting in an open seam use "Open seam" classifiction		
2. On edge, top or raise stitching - more than 1/4 inch (when not resulting in an open seam)		X
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitutes an open seam. On double stitched seams a seam is considered open when one or both stitches of the seam is opened.		
e. Raw edges		
1. On outside		
- more than 1/4 inch to 3/4 inch		X
- more than 3/4 inch	X	
2. On inside		
- more than 3/4 inch		X
3. Any raw edge caused by the omission of overedge or serging stitching for a distance of 1 inch or more		X
*f. Seam and stitch type		
1. Not specified seam or stitch type	X	
2. Any line of stitching omitted or insecure		X
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
4. Looper thread on outside	X	
*g. Stitch tension		
1. Loose tension resulting in a loose seam		
(a) - more than 1 inch	X	
(b) - up to 1 inch inclusive		X
2. Loose tension resulting in loose or tangled loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	

Source: https://assist.dla.mil -- Downloaded: 20261-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
*h. Stitches per inch (score only when condition exists on more than 1/2 the length of seam)		
1. More than the maximum specified		X
2. Less than the minimum by two or more stitches		X
*i. Bartack, backtack, tack or tacking		
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		X
2. Loose stitch tension		X
*j. Seam direction		
Any seam not facing direction specified		X
BELT LOOPS		
a. Belt loop(s) omitted or insecure	X	
b. Bottom end of one or more loops not caught in waistband seam (do not score if the end is turned under and securely tacked)	X	
c. Tacking not extending full width of loop by 1/8 inch or more		X
d. Width of loop(s) less than 1/2 inch or more than 5/8 inch		X
e. Top end of loop(s) extending 1/8 inch or more above top edge of trunks		X
f. One or more loops set on an angle or reverse side out		X
g. Length of loop openings less than 1-5/8 inches or more than 1-3/4 inches (inside measurement)		X
h. Length of turn under at top of loop more than 3/8 inch or less than 1/4 inch		X
BUTTON(S)		
a. Any button missing, loose or broken	X	
b. Not specified type, size or color		X
c. Stitching not locked at end of stitching cycle (tug at loose end of thread to determine if it will ravel)		X
POCKET		
a. Construction and alignment		
1. Pocket poorly shaped, not of uniform shape or size		X
2. Fullness or tightness at pocket opening		X
3. One or both triangular tacks at top corner of pocket omitted or insecure		X
4. Finished width of pocket hem less than 3/4 inch or more than 1 inch		X
5. Set in crooked, i.e., front edge of pocket not parallel with bottom edge of waistband by more than 3/8 inch		X

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
6. Pocket less than 5-1/4 inches or more than 5-3/4 inches deep at center		X
7. Pocket less than 5-1/4 inches or more than 5-3/4 inches wide		X
FLY CONSTRUCTION AND CLOSURE		
a. Closed fly or fly base badly twisted, puckered or bulging		X
b. Left fly exposed beyond front edge		X
c. Right fly stitching exposed beyond left front edge when fly is closed or overlapping stitching by more than 1/4 inch		X
d. Base of fly pleated in fly bartack		X
FLY BUTTONHOLE(S)		
*a. Bottom buttonhole less than 2-1/4 inches or more than 2-1/2 inches from the bottom raw edge of fly piece	X	
*b. Top buttonhole less than 2-7/8 inches or more than 3-1/8 inches from top edge of finished waistband	X	
c. Buttonhole(s) unequally spaced by more than 1/4 inch		X
d. Buttonhole(s) less than 3/8 inch or more than 5/8 inch from inner edge of fly		X X
e. Stitching or bartack between buttonhole(s) missing, insecure, or misplaced to the extent that fly cannot button easily		X
*f. Omitted	X	
*g. Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric	X	
*h. One or more broken or continuous skipped stitches in buttonhole or incomplete buttonhole		X
*i. Wrong type, ends not securely tacked, uncut buttonhole		X
WAISTBAND (Construction)		
a. Fullness or twist on outside of waistband		X
b. Irregular in width by more than 1/8 inch		X
c. Top of trunks badly puckered or pleated at joining to waistband		X
d. Less than 1-3/8 inches or more than 1-5/8 inches wide		X
e. Waistband buttonhole less than 1/2 inch or more than 3/4 inch from front edge or off center with width of waistband by more than 1/4 inch		X

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
f. Waistband or fly button not aligned with respective buttonhole causing bulge or twist when buttoned		X
g. Button on left end of waistband less than 1-3/16 inches or more than 1-5/16 inches from folded edge. (Measure from center of button).		X
h. Top of waistband, when buttoned, out of alignment by 3/8 inch		X
WAIST BELT(S)		
a. Fullness or twist on outside of belts		X
b. Irregular in width by more than 1/8 inch		X
c. Belts badly puckered or pleated at joining to waistband (score only when condition exists on more than 1/2 the length of seam)		X
d. One or both belts omitted	X	
e. Finished width less than 1-1/16 inches or more than 1-3/16 inches		X
f. Belts short, not serving intended purpose		X
g. Front ends of belts attached to waistband with less than two rows of stitching		X
DEE RING(S)		
a. Evidence of corrosion	X	
b. Sharp edge of projection	X	
c. Cracked, broken, bent, malformed or damaged	X	
d. Pronounced tool or forming marks		X
e. Not specified type or material	X	
BUTTONHOLE(S) (Construction)		
a. One or more omitted or added	X	
b. Cut length less than 9/16 inch or more than 11/16 inch		X
c. Not securely caught in fabric, causing stitching to pull away from fabric	X	
d. Wrong type, incomplete stitching, uncut buttonholes, ends not securely tacked, or gimp omitted on one or more buttonholes		X
e. One or more broken stitches or more than 2 skipped stitches in 2 or more buttonholes		X
LEG BOTTOM		
a. Hem twisted or puckered (score only when condition exists on more than 1/2 the length of seam)	X	
b. Hem less than 1/2 inch or more than 5/8 inch wide		X

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
LABEL		
a. Incomplete, illegible, or missing		X
b. Not securely stitched to trunks		X
c. Off center with center of back by more than 2 inches		X

4.4.2.2 Size measurements. Any measurement deviating from the nominal dimensions and tolerances specified in table of measurements shall be scored as a size measurement defect. Side length unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations, shall be as follows:

	AQL's	Inspection levels
For examination in 4.4.2.1:		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For examination in 4.4.2.2:		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of trunks shall be folded in half along the length. The bottom of the trunks shall be folded up so that the trunks measure approximately 11-1/2 by 7-1/2 inches. The large sizes, shall have the side seams adjusted inward to achieve the desired width. Five pairs of trunks of one size only, shall be neatly stacked with each pair reversed end to end and secured at each end with cotton tape or twine to form a bundle.

5.1.2 Level C. Trunks shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Twenty pairs of trunks of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15C, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A bundles shall be packed flat, two in length, one in width, and two in depth, with the length of the bundles parallel to the end panels of the container. The contents of each container shall be completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:34Z
Check the source to verify that this is the currentversion before use.

* 5.2.2 Level B. Twenty pairs of trunks of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A bundles shall be packed flat, two in length, one in width, and two in depth, with the length of the bundles parallel to the end panels of the container. The contents of each container shall be completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "MIXED NSN'S" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and National Stock Numbers contained therein.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The trunks are intended for wear by the Navy Seal Team, for swimming purposes.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Sizes required (see 1.2)
c. When first article sample is required (see 3.2)
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
*e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 The dee rings may be obtained from North and Judd Manufacturing Company, No. 4962.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.7 Subject term (key word) listing.

Khaki 3729
Trunks, semi-boxer
Trunks, swimmers
Twill, cotton
Twill, poly/cotton

Custodian:
Navy - NU

Review Activity:
DLA - CT

User activities:
Navy - OS
* Air Force - 45

Preparing Activity:
Navy - NU

Project No. 8415-0497

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

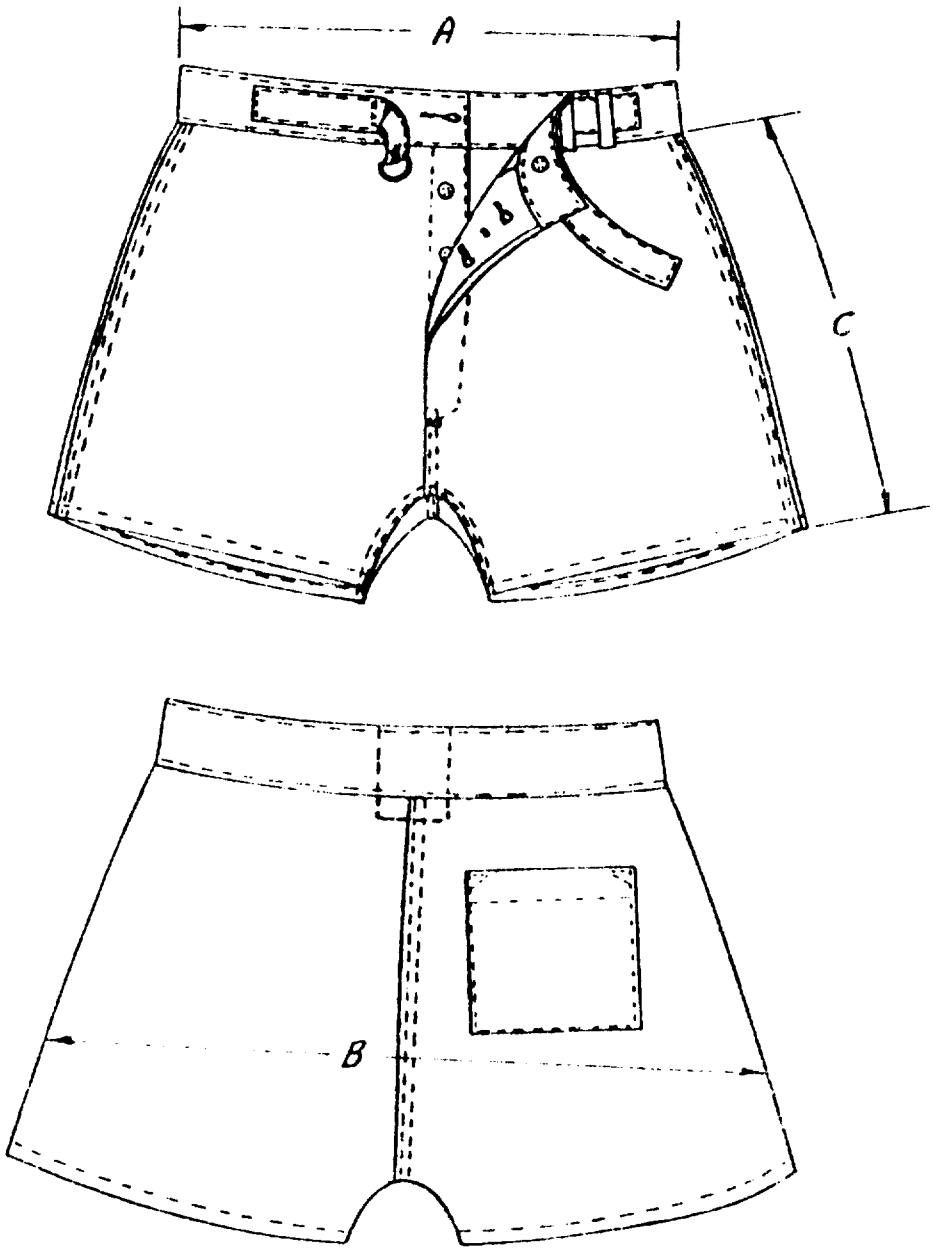


FIGURE 1 TRUNKS, SWIMMERS

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036/71103

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-29112C	TRUNKS SWIMMERS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:34Z
Check the source to verify that this is the current version before use.