INCH-POUND

MIL-DTL-29112D
27 APRIL 2000
SUPERSEDING
MIL-T-29112C
3 MARCH 1987

DETAIL SPECIFICATION

TRUNKS, SWIMMERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This detail specification covers one type of swimmers trunks for use by Personnel of the Department of Defense.

1.2 Classification. The trunks maybe one type in the following sizes:

28, 30, 32, 34, 36, 38 and 40.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-CRFD, 700 Robbins Ave., Philadelphia, PA 19111, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC 3 - Colorfastness to Bleaching with Chlorine
AATCC 15 - Colorfastness to Perspiration
AATCC 16 - Colorfastness to Light: General Method
AATCC 61 - Colorfastness to Laundering, Home and Commercial: Accelerated
AATCC 96 - Dimensional Changes in Commercial Laundering of Woven and Knitted Fabrics except Wool
AATCC 111A - Weather Resistance: Sunshine Arc Lamp Exposure with Wetting
AATCC 132 - Colorfastness to Dry Cleaning

(Applications for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection of Attributes

(Copies may be obtained from the American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 53201-4606.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D1424 - Resistance of Woven Fabrics by Falling Pendulum
ASTM D2256 - Tensile Properties of Yarns by the Single-Strand Method
ASTM D3776 - Mass Per Unit Area (Weight) of Woven Fabric
ASTM D5034 - Force and Elongation of Textile Fabrics (Grab Test)

(Applications for copies should be addressed to American Society For Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In th event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified, (see 6.3), a sample shall be subjected to first article inspection, in accordance with 4.2.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Materials and components

3.3.1 Basic material. The basic material shall be 100 percent combed cotton, single ply yarn for both warp and filling, 3 up 1 down left-hand twill conforming to the requirements in Table I. The color shall be Khaki 3729 (see 4.3).

3.3.1.1 Shade matching. The color of the test specimen shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight, and have a correlated color temperature of 7500K (+/- 200K), with illumination of 100 (+/- 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300K (+/- 200K).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE I. Basic material

CHARACTERISTICS	REQUIREMENTS	
	MIN.	MAX.
Weight oz./sq. yd.		
Basic material	7.4	8.1
Breaking strength (lb.)		
Warp:	160	----
Filling:	80	----
Tearing strength (lb.)		
Warp:	7	----
Filling:	7	----
Colorfastness		
Laundering:	Grade 4	----
Light:	Grade 4	----
Perspiration:	Grade 4	----
Bleaching:	Grade 4	----
Wet-dry cleaning	Grade 4	----
Weathering:	Grade 4	----
Dimensional Stability %:		
Warp:	----	± 2
Filling:	----	± 2

3.3.2 Thread. The thread shall be spun combed cotton machine thread, soft finished, 14,173 to 16,535 yards per pound, 3-ply with a minimum breaking strength of 1.2 pounds when tested in accordance with 4.4.1. The color of the thread shall be a good match to the basic material. The finished thread shall have no chemical finishes or treatments, other than those commonly used on commercial threads. The direction of the final twist shall be "Z".

3.3.3 Button. The buttons for the fly and the waistband shall be melamine formaldehyde composition, 24 lignes and shall conform to the style shown in Figure 1. The button shall have an overall thickness of 0.125 (± 1/32) inch. The color shall be a good match to the basic material and the compressive strength shall be 800 (lb., min.) when tested in accordance with 4.4.1. The buttons shall be resistant to water when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

3.3.4 D-ring. The nonmagnetic d-rings shall be black acetyl, size 1-inch and shall conform to Figure 2. (see 4.4.1 and 6.5).

3.3.5 Gimp. The gimp used for reinforcing the buttonholes shall be cotton, soft finish, vat dyed, size 8, 3-ply (min.) and shall be a good match to the basic material. The direction of the final twist shall be "S" (see 4.4.1).

3.4 Description. The semi-boxer type swimmers trunks shall have a waistband with attached 1/2 belt straps. There shall be two belt loops on the left front and the left belt shall loop through the two D-ring closures on the right belt for fit adjustment. The trunks shall have a button fly. The button fly shall have buttons placed one (1) on the inside left waistband and three (3) on the right fly. The trunks shall have a patch pocket on the back right side.

3.4.1 Performance requirements. The overall design of the semi-boxer type swimmers trunks shall be suitable when worn alone or under a wet suit and shall be static free. The trunks shall be non-chaffing and non-pinching under pressure of the wet suit and have a low noise signature closure systems that allows for adjustability and access for a catheter.

3.5 Patterns. Standard patterns shall be furnished to the contractor for use in cutting working patterns (see 6.4). The working patterns shall be identical to the government patterns. The standard patterns shall not be altered in any way and are to be used as a guide form making the contractor's working patterns. The working patterns shall be identical to the standard patterns. The patterns provide for a 1/2 inch seam allowance for all doubled lapped and double stitched seams 3/8 inch for waistband, waistband attachment, pocket and belts.

3.5.1 List of pattern parts. The pattern parts and cutting quantities for the trunks shall be as listed in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE II. Pattern Parts

Material	Computer name	Part name	Number of cut pieces
Cloth, Twill	FRONT	Front	2
	BACK	Back	2
	RFLYLIN	Right fly lining	1
	LEFTFLY	Left fly	1
	WAISTBAND	Waistband	1
	WSTBANDALT	Waistband alternate	2
	LEFTBELT	Left belt	1
	RIGHTBELT	Right belt	1
	HIPPOCKET	Hip pocket	1

3.6 Construction. Construction of the swimmers trunks shall refer to Figures 2, 3 and 4.

3.6.1 Seams and stitching. Double lapped seams and double stitched seams shall be used for the crotch and side seams. Seam allowances shall be 1/2 inch for all double lapped and double stitched seams and 3/8 inch for the waistband, waistband attachment, pocket and belts. The front rise shall be a mock double needle, double lapped seam. All fly pieces, pocket hem and the fly extension on the fronts shall be overedged. All belts, waistbands, pocket edges, right fly front and belt loops shall be edgestitched 1/16 inch from folded edge. All general stitching shall have a minimum of 10-12 stitches per inch. For overedge stitching, the stitches per inch shall be a minimum of 8-12. Thread breaks and ends of stitching not caught in another line of stitching shall be backstitched at least 1/2 inch. All thread ends shall be trimmed to 1/8 inch and all loose thread shall be removed from the trunks. Raw edges are not acceptable anywhere on the garment, except on the pocket seam allowances.

3.6.2 Hem. The leg hem shall be turned 3/8 inch and turned again 1/2 inch and edged stitched 1/16 from inside fold. The finished hem shall measure 1/2 inch (± 1/16).

3.6.3 Fly front. The fly piece (on the left front) shall be reinforced with a horizontal line of stitching centered between buttonholes as marked on the patterns. Stitching shall not extend past the finished folded edge of the left front. The "J" stitching on the left front shall measure 1-5/8 (± 1/8) inches from the front folded edge. The right fly shall have 3 buttons matching corresponding buttonholes and shall measure 1-1/2 (± 1/8) inches from finished stitching to finished folded edge of the right front. The end of the fly closure shall have a bar tack across the double needle double lap stitching through all plies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

3.6.4 Buttonhole placement. Buttonholes shall measure 5/8 inch (+ 1/32) cut length, have an eyelet end, taper bar type with worked over gimp and end securely tacked with purling on the outside on the left fly piece. The buttonhole at the end of the waistband shall be the same except the purling shall be on the inside. Three (3) horizontal buttonholes shall be placed on the left fly piece 1/2 (+ 1/32) inch from the inner folded edge of the fly piece to the inside edge of the eyelets, according to marks on the pattern. One (1) horizontal buttonhole shall be placed on the right end of the waistband 3/4 (+ 1/32) inch from the finished folded edge to inside edge of eyelet and centered.

3.6.5 Buttons attachment. Three (3) buttons shall be attached on the right fly through all plies to correspond to the buttonholes on the left fly. One (1) button shall be placed on the left end of the waistband 1-1/4 (+ 1/32) inches from the finished folded edge and centered to correspond with the buttonhole on the right end of the waistband. The waistband button shall be attached on the inside of the waistband to the inner ply only.

3.6.6 Waistband, belt and belt loops. The waistband) shall measure 1-1/2 inches wide (+ 1/8). Each belt (right and left) shall measure 1-1/8 (+ 1/16) inches wide. The waistband shall have two (2) belt loops positioned 2-1/8 (+ 1/8) inches apart and 2-3/8 (+ 1/8) inches from the finished front edges as marked on the pattern. A bartack shall be placed across the top of each belt loop parallel to the waistband. The waistband shall have two adjustment belt straps at center front. The right belt shall carry the two (2) D-rings for adjustability and positioned on the waistband as marked on the patterns. (see Figure 2). The left belt shall be positioned on waistband under the 2 belt loops. Ends of the waistband shall be turned in no more than 3/4 inch and no less than 1/2 inch. Belt loops shall measure 1/2 inch wide (+ 1/16) and double stitched with a 3/8 inch gauge. The belt loop opening shall finished 1-5/8 to 1-3/4 inches in length measured from stitching at the top of the waistband to the bottom inside folded edge.

3.6.7 Patch pocket. The back patch pocket on the right side shall measure 5-1/2 (+1/4) inches long and 5-1/2 (+ 1/4) inches wide. For design uniformity, the top corner of the pocket shall be tacked with a triangular stitching. The base of triangle shall be at top corner of pocket and apex at lower corner of hem. The triangle base shall measure 3/16 to 5/16 inch and the sides shall measure 3/4 to 7/8 inch.

3.7 Labels. A commercial-type label shall include the contractor's name, contract number, size and National Stock Number (NSN), fiber and laundering information. The inscription on the label shall be legible and shall show fastness to laundering. The label shall last the life of the garment. The commercial label shall be positioned and stitched on all four sides, 1/16 inch from edge, and placed on the inside waistband 1/2 inch above the waistband seam at the center back of the trunks. The laundering information shall read as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

LAUNDERING INFORMATION
Hand or Machine Wash in Cold or Warm Water
Do Not Bleach or Iron. Tumble Dry Low Setting (Medium Heat)
or
Use Navy Wash Formula II
Tumble Dry Medium Heat

3.7.1 Barcode label. The swimmer trunks shall have a printed individual bar-code label that is clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). There shall be a 12 digit UPC number assigned for all NSNs by DSCP. The initials UPC must appear beneath the UPC code. The bar code NSN and UPC types shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.8 Finished measurements. The trunks shall be provided in the sizes and measurements in accordance with Table III and Table IV.

TABLE III. - Sizes and measurements (in inches)

SIZES	(A) WAIST	(B) SEAT	(C) SIDE LENGTH	(D) LEG OPENING
28	28	36	10-3/4	11-3/4
30	30	38	10-7/8	12-1/8
32	32	40	11	12-1/2
34	34	42	11-1/8	12-7/8
36	36	44	11-1/4	13-1/4
38	38	46	11-3/8	13-5/8
40	40	48	11-1/2	14
Tolerance	+1, -1/2	+/- 1	+/- 1/4	+/- 1/4

NOTE: Measurements shall be taken with the trunks laid flat and smooth with fly buttoned.

(A) WAIST - Measure the width across the top of waistband from folded edge to folded edge.
(B) SEAT - Measure across the seat from folded edge to folded edge approximately six (6) inches up from bottom of trunks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

(C) SIDE LENGTH - Measure from bottom of waistband to bottom of finished hem, along side seam.

(D) LEG OPENING - Fold inseam and outseam together, measure from the folded edge to the folded edge of each leg opening with opening laid flat.

TABLE IV. Finished part measurements (inches) 1/

Swimmers Trunk Part (all sizes)	Finished Measurement (inches)
E. Waistband width	1-1/2 ± 1/8
F. 1/2 belt width	1-1/8 ± 1/16
G. 1/2 belt length (right)	6-1/4 ± 1/4
H. 1/2 belt length (left)	11 ± 1/4
I. Patch pocket width	5-1/2 ± 1/4
J. Patch pocket length	5-1/2 ± 1/4
K. Belt loop length	2 ± 1/8
L. Belt loop width	5/8 ± 1/16

1/ There are no figures for measurements E through L.

E. The waistband width shall be measured at the center back.

F. The 1/2 belt width shall be measured from edge to edge in the center of each 1/2 belt.

G. The length of the right 1/2 belt shall be measured from the edgestitching on the waist to the edge of the fold where the belt passes through the D-rings.

H. The length of the left 1/2 belt shall be measured from edgestitching on the waist to the opposite edge.

I. The pocket width shall be measured from edge to edge at the center of the pocket.

J. The pocket length shall be measured from edge to edge at the center of the pocket.

K. The belt loop length shall be measured from folded edge to folded edge.

L. The belt loop width shall be measured from edge to edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished swimmers trunks shall conform to the quality of product established by this specification. Proper seam allowance and stitching shall be maintained to prevent raw edges, run-offs, twists, pleats, puckers or open seams. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. All stitching shall be uniformly gauged throughout the trunks. All loose threads shall be removed from the trunks.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Conformance inspection (see 4.3.1)

4.2 First article inspection. When a first article is required (see 3.1), it shall be examined for the requirements of Table V.

TABLE V. First article examinations and tests

INSPECTION	REQUIREMENT	INSPECTION METHOD
Component and Material Inspection	3.3.1, 3.3.1.1, 3.3.2, 3.3.3, 3.3.4, 3.3.5	4.4.1
Visual Examination	3.5, 3.7, 3.7.1, 3.7.2, 3.7.3, 3.7.4, 3.7.5, 3.7.6, 3.7.7, 3.8, 3.8.1, 3.10	4.4.2
Dimensional Examination	3.9	4.4.3

4.3. First article units. The trunks selected as first article units from the sample lot shall be thoroughly checked for dimensional and visual conformance to this purchase description. The sample size of the first article lot shall be specified in the contract. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. The first article inspection samples shall be furnished to the Government as directed by the contract (see 6.2).

4.3.1 Conformance inspection. Unless otherwise specified, conformance testing shall be performed on production lot articles for the requirements of Table VI. Sampling for the inspection shall be performed in accordance with ANZI/ASQC Z1.4 (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

Table VI: Conformance Inspection Examinations and Tests.

INSPECTION	REQUIREMENT	INSPECTION METHOD
Visual Examination	3.5, 3.7, 3.7.1, 3.7.2, 3.7.3, 3.7.4, 3.7.5, 3.7.6, 3.7.7, 3.8, 3.8.1, 3.10	4.4.2
Dimensional Examination	3.9	4.4.3

4.4 Inspection methods.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable procurement documents. In addition, testing shall be in accordance with Table VI.

TABLE VII. Component and material inspection

CHARACTERISTICS	REQUIREMENT PARAGRAPH	TEST METHOD
Basic Material	3.3.1	
Fiber Identification	3.3.1	Visual 1/
Weight oz./sq. yd.	3.3.1	ASTM D3776
Tearing Strength (lb.)	3.3.1	ASTM D1424
Colorfastness (min.)		
Laundering	3.3.1	AATCC-61, TM 3A
Light	3.3.1	AATCC-16 Opt. A
Perspiration	3.3.1	AATCC-15
Bleaching	3.3.1	AATTCC-3
Wet-dry cleaning	3.3.1	AATCC-132
Weathering	3.3.1	AATCC-111A
Dimensional Stability	3.3.1	AATCC-96 2/
(percentage)	3.3.1	
	3.3.1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE VII. Component and material inspection (contd.)

CHARACTERISTICS	REQUIREMENT PARAGRAPH	TEST METHOD
Thread		
Fiber Identification	3.3.2	Visual 1/
Breaking strength (lb.)	3.3.2	ASTM D2256
Button:		
Compressive strength	3.3.3	4.4.4
Resistance to water	3.3.3	4.4.5
D-rings		
Material identification	3.3.4	Visual 1/
Gimp	3.3.5	Visual 1/
Labels:		
Colorfastness to laundering	3.3.8	AATCC-61, Test IVA

1/ A Certificate of Compliance is acceptable. Where certificates of compliance submitted, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the material or components to verify the validity of the certification.

2/ Use Opt. Vc, for washing and Opt. D for drying. (The sample should not be subjected to restorative procedure.)

4.4.2 End item visual inspection. The end items shall be examined for the defects listed in Table VIII. The lot size shall be expressed in units of swimmers trunks. The sample unit shall be one trunk.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE VIII End Item Visual Defects

EXAMINE	DEFECT	CLASSIFICATION	
		MAJOR	MINOR
Material	Any hole, cut, tear, smash, mend, needle chew, burn, drill hole, scorched area, misweave or other material defect:		
	On outside	101	
	On inside		201
Color	Variation in shade within a part, any part shaded.	102	
	Thread does not match material.	103	
Cleanness	One or more spots or stains on outside:		
	Up to 1/2 inch		202
	More than 1/2 inch	104	
	Trunks contain lint, loose threads or size markings.		203
	More than 3 thread ends not trimmed to 1/4 inch or less outside.		204
	More than 5 thread ends not trimmed to 1/2 inch or less on inside.		205
Cutting	Any component part not cut in accordance with directional lines indicated on patterns or in accordance with specification requirements.	105	
Construction and workmanship; general (applicable to all components unless otherwise indicated herein)	Component misplaced, operation omitted, or operation not properly performed.	106	
	Improper marking method used.	107	
	Component missing, not as specified or not securely affixed.	108	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE VIII. End Item Visual Defects (continue.)

	Mend in fabric (i.e. patches or splices – not applicable to restitched seam repair).	109	
	Needle chews likely to develop into a hole.	110	
	Any component part tight, twisted, distorted, pleated, full, misshape, or puckered (unless otherwise specified herein).	111	
	The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein).		206
Seams and Stitching	Open seams in single stitched seam.	112	
	Open seam in any row of a double stitched seam.	113	
	Open seam not repaired as specified (when applicable) NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur.		207
	Not specified seam type.	114	
	Not specified stitch type.	115	
	Not specified seam width.	116	
	Row of stitching omitted.	117	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE VIII. End Item Visual Defects (continued)

EXAMINE	DEFECT	CLASSIFICATION	
		MAJOR	MINOR
Seams and Stitching - Continued	Bartack, backtack, tack or tacking: missing insecure, misplaced, not serving intended purpose or not specified size or type Loose stitch tension resulting in a loosely secured seam.		208
	More than 1 inch	118	
	Up to 1 inch inclusive		209
	Tight stitch tension resulting in cutting of fabric or breaking of stitches when normal pull is applied.	119	
	Ends of stitching not secured as specified.		210
	Not backstitched where required.		211
	Gage of stitching irregular or not as specified, affecting appearance.	120	
	Part caught in unrelated row of stitching. specified.	121	
	One or two stitches per inch less than		212
	Three or more stitches per inch less than specified.	122	
	More than the specified maximum numbers of stitches per inch damaging materials.		213
	More than the specified maximum number of stitches per inch not damaging materials.		214

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

TABLE VIII. End Item Visual Defects (continued)

EXAMINE	DEFECT	CLASSIFICATION	
		MAJOR	MINOR
Seams and Stitching - Continued	Poorly assembled affecting serviceability (e.g. pieces are distorted, twisted, affecting comfort of wearer)	123	
Label	Omitted, incorrect, illegible, or misplaced size and identification label and/or barcode.		215
	Size and identification label not securely sewn.		216
	Off center with center of back by more than 2 inches.		217

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in Table III and 3.8. Any finished garment dimensions not within the specified tolerance shall be classified as a major defect. The lot size shall be expressed in units of swimmer trunks. The sample shall be one swimmer trunk. Any construction and/or component dimensions that affect form, fit or function shall be classified as major. Any construction dimensions that do not affect form, fit or function shall be classified as minor defects.

4.4.4 Compressive strength. Compressive strength of the buttons shall be conducted using apparatus which permits gradual application of the load either by manual or automatic application of the load either by manual or automatic mechanism. The instrument gage shall be calibrated that the load deflection at the point of failure is at least one third of the total capacity of the gage. Buttons shall be placed face down one at a time between flat blocks of steel and tested to failure. Failure is define as the first sign of a crack in the button visible to the naked eye (a visible crack in the button will usually be found at the first audible sound of cracking). The load in pounds, which produces this failure, shall be recorded as the compressive strength of the button. Extreme care shall be taken to apply the pressure centrally and evenly over the entire surface of the button, which is in contact with the steel blocks. The results for all the buttons in the sample shall be averaged and reported to the nearest pound. Failure of the average to conform to the specified requirements shall be considered a test failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

4.4.5 Resistance to Water. The buttons resistance to water shall be tested. The buttons shall show no crazing or distortion, shall not exhibit yellowing or loss in color or luster. The buttons shall be immersed in boiling distilled water for 1 hour and immediately thereafter dried and examined by holding the button at arm's length under a strong white light. Any evidence of crazing, distortion, yellowing, loss in color or luster shall be considered a test failure.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The swimmer trunks are intended for wear by the Special Warfare Groups under wet suit as well as alone when the mission continues on the beach.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2)
c. When first article is required (see 3.1 and 6.3)
d. Packaging requirements (see 5.1)

6.3 First article. When a first article inspection is required, it may be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify that appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisitions documents regarding arrangements for selection, inspection, and approval of first article.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

6.4 Patterns. For access to patterns, address the acquiring activity issuing the invitation for bids.

6.5 Sources of Supply. An acceptable D-Ring is available from ITW Nexus, Part No. 100-0100, 195 Algonquin Road, Des Plaines, Illinois 60016, (847) 299-2222.

6.6 Subject term (key word) listing.

Khaki 3729
Trunks, semi-boxer
Trunks, swimmers

6.7 Acceptance criteria. Acceptance criteria may be as specified in the contract or purchase order.

MILITARY INTERESTS:

Custodians
Navy - NU
Air Force – 11.6

Review Activities
Air Force – 45

PREPARING ACTIVITY:
DLA - CT

Project 8415-0154

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

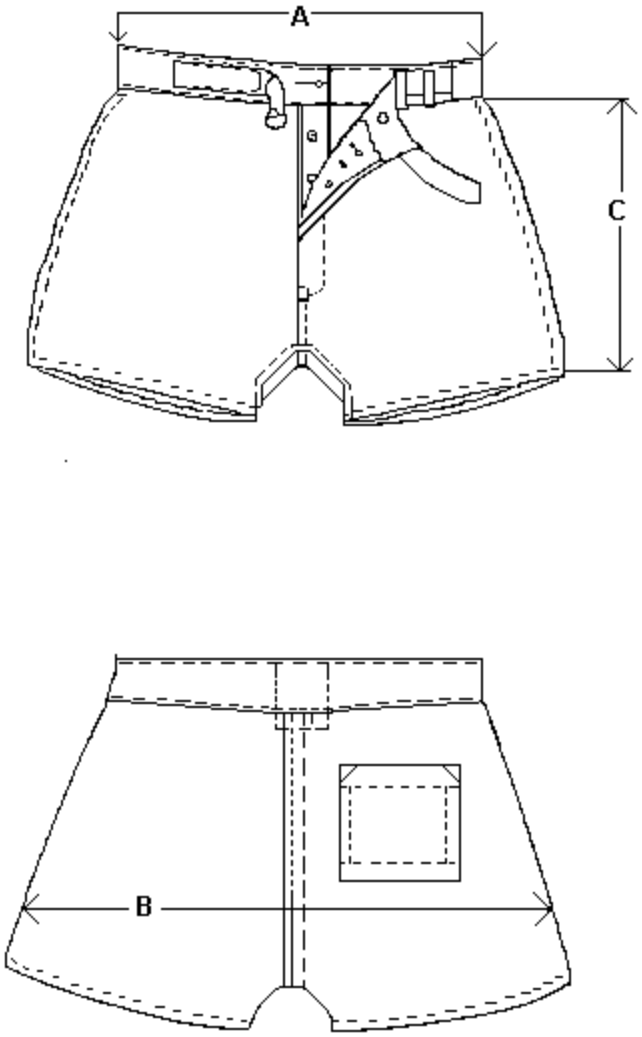


FIGURE 1. TRUNKS, SWIMMERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.


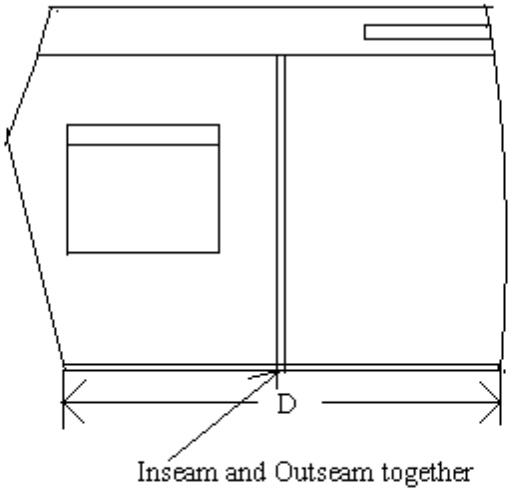


FIGURE 2. TRUNKS, SWIMMERS (SIDE VIEW)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

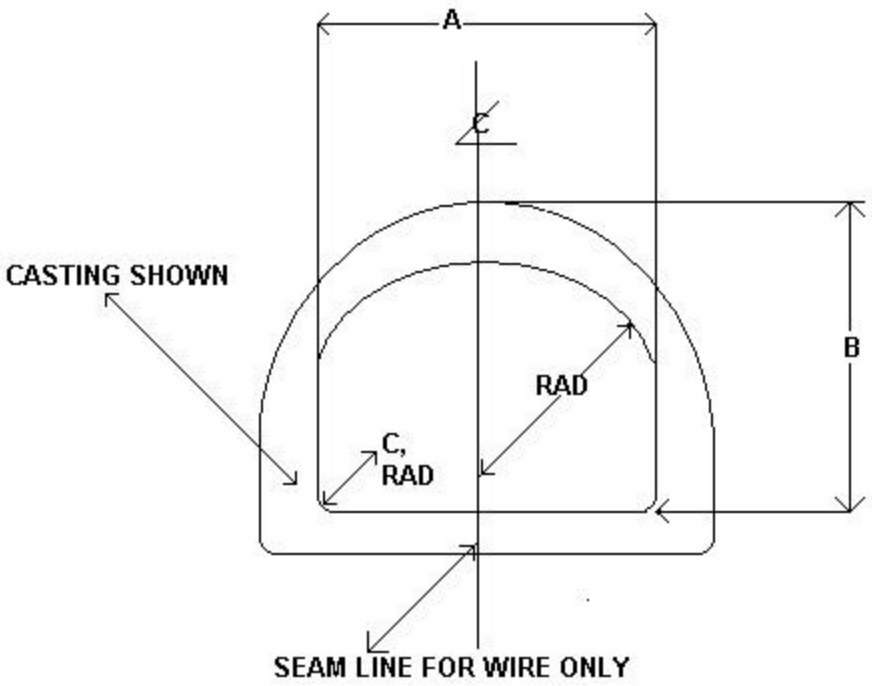

DIM	B DIM	C RAD	WIRE DIAMETER		CAST BRASS DIA
			BRASS	STEEL	
1	3/4	1/32	.1620	.1620	11/64
1-5/8	2-1/4	1/16	------	.3065	------
1-3/4	1-3/4	1/8	------	.3065	------
3	2	1/4	------	.5000	------

FIGURE 3. D-RINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.



FIGURE 4. - BUTTON (style)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DLT-29112D	**2. DOCUMENT DATE (20000427)**

3. DOCUMENT TITLE TRUNKS, SWIMMERS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON	**7.DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Supply Center Philadelphia Clothing and Textiles	b. TELEPHONE *Include Area Code)* (1) Commercial (215) 737-5828 (2) AUTOVON 444-5828
c. ADDRESS *(Include Zip Code)* DSCP-CRFD 700 Robbins Ave. Philadelphia, PA 19111	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman road, Suite 2533 Ft. Belvoir, VA 22060-2533 Telephone (703) 767-6888 AUTOVON 427-6888

DD Form 1426, FEB 1999 (EG) *PREVIOUS EDITION IS OBSOLETE* *WHS/DIOR, Feb 99*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:34Z
Check the source to verify that this is the current version before use.